


Pedestal Mount, Cast Iron & Stainless Steel, Self-Priming

Series 9203C-SP and 9203S-SP

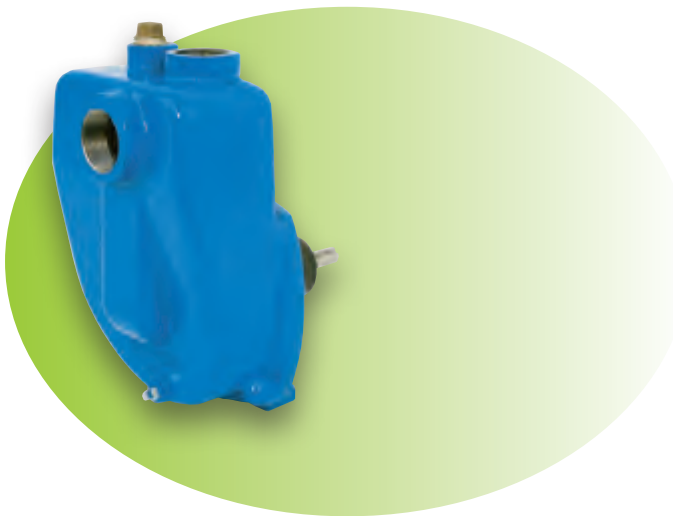

- Available in cast iron and stainless steel
- Pedestal mount, direct drive
- Port sizes: 1½ inch NPT inlet, 1¼ inch NPT outlet (9203C-SP, 9203S-SP)
- Port sizes: 2 inch NPT inlet, 2 inch NPT outlet (9203C-R-SP)
- Fill port: ¾ inch FNPT
- Max. fluid temperature 60°C
- Impeller: Nylon (cast iron standard); polypropylene (stainless steel); GTX available
- Pump shaft rotation: CCW* (9203C-R-SP is CW)
- Shaft diameter 5/8 inch (15,9 mm)
- Weight: 17,3 kg
- Pump seals: Cast Iron models – Viton/ceramic standard; Life Guard® silicon carbide (B) and Buna-N ceramic available; Stainless Steel models – Life Guard® silicon carbide standard

Order Information

Model Number	Max LPM	Max BAR	Max RPM
9203C-SP	458	9	6000
9203C-R-SP (CW)			
9203S-SP			
3430-0332	Seal and o-ring repair kit		
3430-0589	Life Guard® silicon carbide seal kit		
3430-0480SP	Self priming chamber kit		
3430-0482SP	Self priming chamber kit for reverse rotation ONLY		

Life Guard® silicon carbide seal - Add suffix "B" (i.e.: 9203C-SP-B)

9203C-SP, 9203S-SP

RPM	LPM at 1,4 BAR	LPM at 2,1 BAR	LPM at 2,8 BAR	LPM at 3,4 BAR	LPM at 4,1 BAR	LPM at 4,8 BAR	LPM at 5,5 BAR	LPM at 6,2 BAR	LPM at 6,9 BAR	LPM at 7,6 BAR	LPM at 8,3 BAR
3600	382	318	227	95							
4200	447	424	367	299	204	87					
5000	458	454	450	443	416	363	295	197	95		
5500	458	454	450	447	439	435	416	363	299	201	110
6000	458	454	450	447	439	435	432	428	416	375	310

*CCW (counterclockwise) CW (clockwise) are determined when looking at the shaft end.