


Pedestal Mount, Cast Iron

Series 9205C

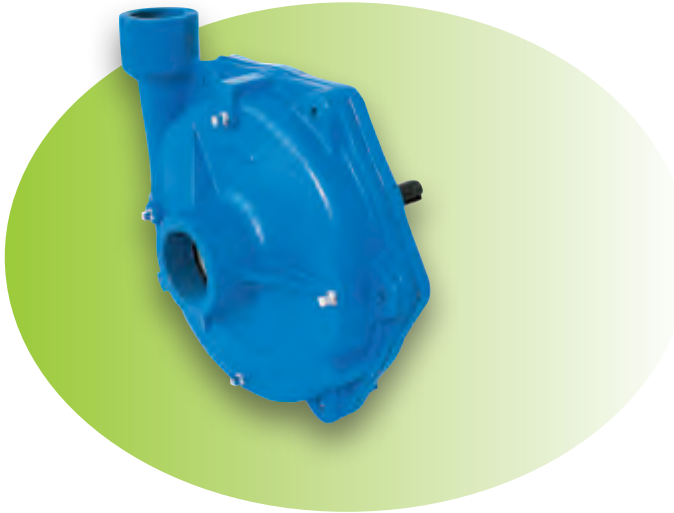

- Pedestal mount, direct drive
- Port sizes: 2 inch NPT inlet, 1½ inch NPT outlet
- Max. fluid temperature: 60°C
- Housing: cast iron
- Impeller: Nylon
- Pump shaft rotation: CCW*
- Shaft diameter 7/8 inch (22,2 mm)
- Weight: 21,4 kg
- Pump seals: Viton/ceramic standard; Life Guard® silicon carbide (B) and Buna-N ceramic available

Order Information

Model Number	Max LPM	Max BAR	Max RPM
9205C	681	12	4200
3430-0537	Seal and o-ring repair kit		
3430-0646	Life Guard® silicon carbide seal kit		

Life Guard® silicon carbide seal - Add suffix "B" (i.e.: 9205C-B)

9205C

RPM	1,4 BAR		2,8 BAR		4,1 BAR		5,5 BAR		6,9 BAR		8,3 BAR		9,7 BAR		11,0 BAR	
	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP
3000	625	11,4	621	11,7	583	11,6	394	9,5								
3400	662	14,8	662	15,5	655	16,3	636	16,3	481	14,2	163	8,7				
3800	681	18,2	681	18,8	681	19,8	674	21,1	655	21,8	591	20,7	424	17,5		
4200	681	21,9	681	22,0	681	24,0	681	25,3	681	26,9	670	27,9	655	28,1	594	26,4

*CCW (counterclockwise) CW (clockwise) are determined when looking at the shaft end.