


# VSP – MK

## PERFORMANCE RANGE

50 Hz

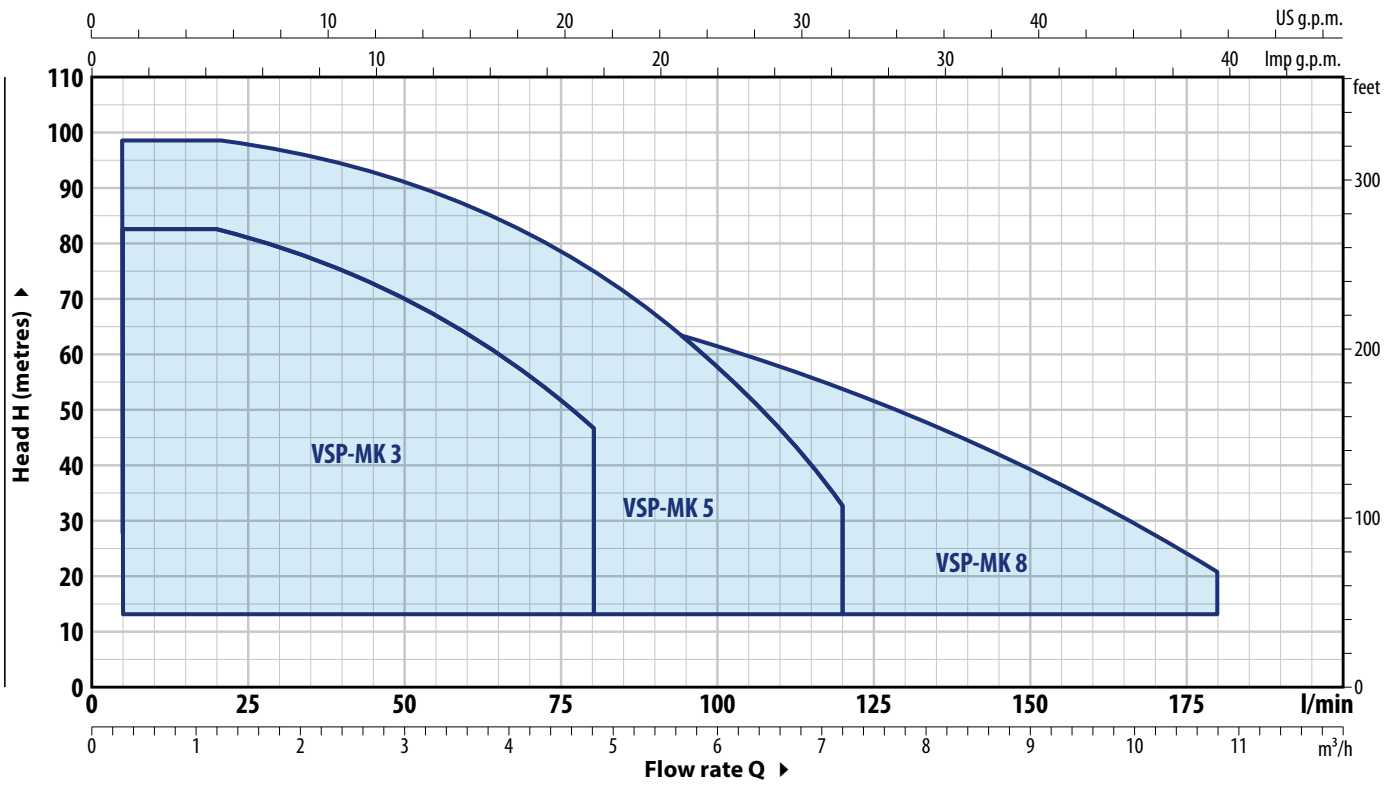







## TECHNICAL DATA





TYPE	POWER		ABSORPTION 230 V	PERFORMANCE		PERFORMANCE (ADJUSTABLE SET POINT)					
	P <sub>2</sub> kW	HP		Q litres/min	H metres	Set Point Min		Set Point Calibration Std		Set Point Max	
<b>Single-phase</b>						bar	l/min	bar	l/min	bar	l/min
VSPm - MK 3/3	0.75	1	6.2 A	10 – 80	52 – 29	1.4	5 – 52	4.0	5 – 52	5.0	5 – 14
VSPm - MK 3/5	1.1	1.5	7.8 A	10 – 80	85 – 48	2.3	5 – 52	4.0	5 – 72	8.3	5 – 13
VSPm - MK 3/6	1.5	2	9.0 A	10 – 80	101 – 56	2.7	5 – 53	4.0	5 – 65	9.7	5 – 19
VSPm - MK 5/4	0.75	1	6.4 A	20 – 120	55 – 20	1.5	5 – 101	4.0	5 – 82	5.3	5 – 26
VSPm - MK 5/5	1.1	1.5	6.5 A	20 – 120	69 – 21.5	1.8	5 – 108	4.0	5 – 99	6.7	5 – 13
VSPm - MK 5/7	1.5	2	9.0 A	20 – 120	95 – 30	2.6	5 – 109	4.0	5 – 111	9.3	5 – 16
VSPm - MK 8/4	1.1	1.5	8.3 A	40 – 180	53 – 12	1.4	5 – 175	4.0	5 – 115	5.2	5 – 30
VSPm - MK 8/5	1.5	2	10.0 A	40 – 180	68 – 15.5	1.8	5 – 175	4.0	5 – 138	6.6	5 – 45

TYPE	POWER		ABSORPTION 400 V	PERFORMANCE		PERFORMANCE (ADJUSTABLE SET POINT)					
	P <sub>2</sub> kW	HP		Q litres/min	H metres	Set Point Min		Set Point Calibration Std		Set Point Max	
<b>Three-phase</b>						bar	l/min	bar	l/min	bar	l/min
VSP - MK 3/3	0.75	1	1.7 A	10 – 80	52 – 29	1.4	5 – 52	4.0	5 – 52	5.0	5 – 14
VSP - MK 3/5	1.1	1.5	2.3 A	10 – 80	85 – 48	2.3	5 – 52	4.0	5 – 72	8.3	5 – 13
VSP - MK 3/6	1.5	2	2.8 A	10 – 80	101 – 56	2.7	5 – 53	4.0	5 – 65	9.7	5 – 19
VSP - MK 5/4	0.75	1	2.0 A	20 – 120	55 – 20	1.5	5 – 101	4.0	5 – 82	5.3	5 – 26
VSP - MK 5/5	1.1	1.5	2.2 A	20 – 120	69 – 21.5	1.8	5 – 108	4.0	5 – 99	6.7	5 – 13
VSP - MK 5/7	1.5	2	3.0 A	20 – 120	95 – 30	2.6	5 – 109	4.0	5 – 111	9.3	5 – 16
VSP - MK 5/8	2.2	3	3.5 A	20 – 120	108 – 34	2.9	5 – 109	4.0	5 – 115	10.6	5 – 14
VSP - MK 8/4	1.1	1.5	2.8 A	40 – 180	53 – 12	1.4	5 – 175	4.0	5 – 115	5.2	5 – 30
VSP - MK 8/5	1.5	2	3.4 A	40 – 180	68 – 15.5	1.8	5 – 175	4.0	5 – 138	6.6	5 – 45
VSP - MK 8/6	2.2	3	3.8 A	40 – 180	81 – 18.5	2.2	5 – 175	4.0	5 – 149	8.0	5 – 22


**PERFORMANCE CURVES**

**50 Hz**

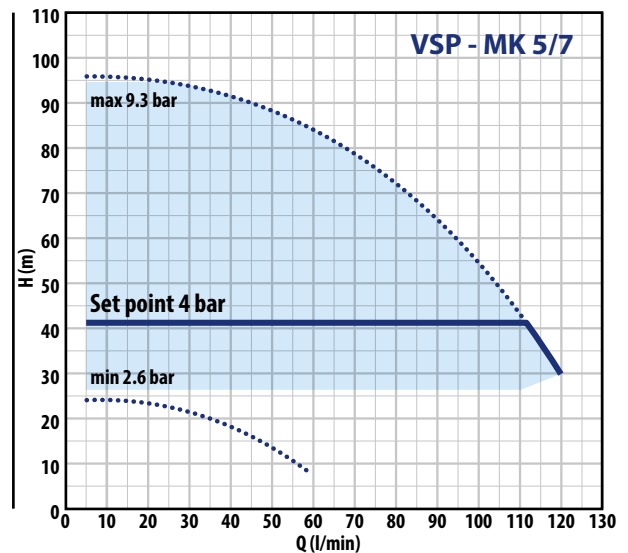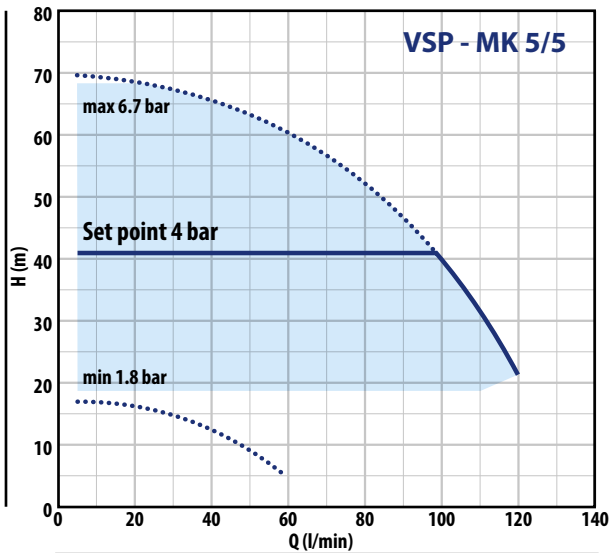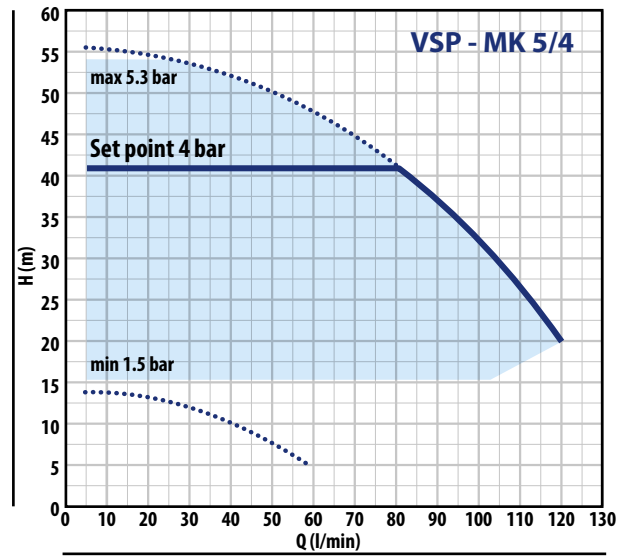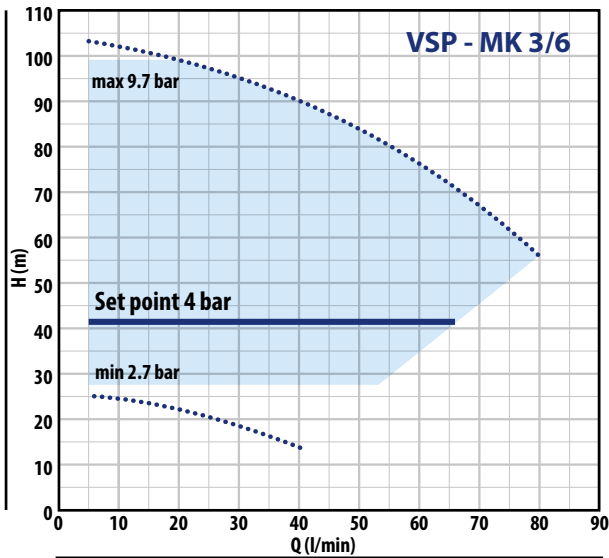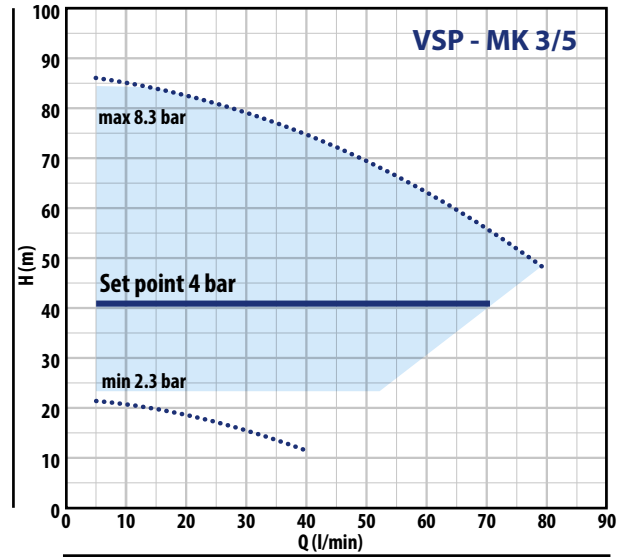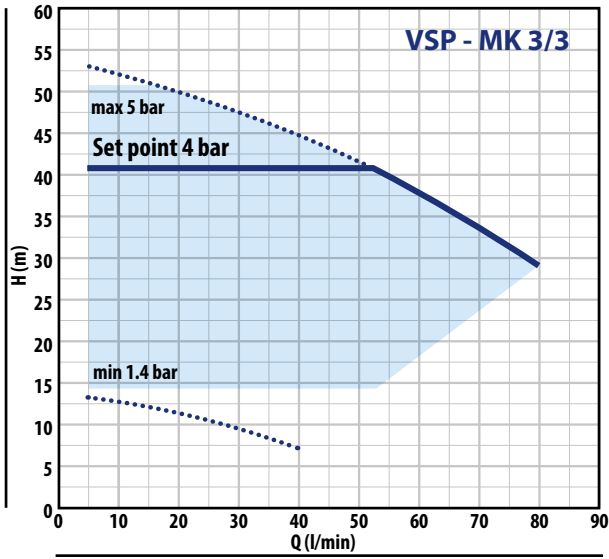

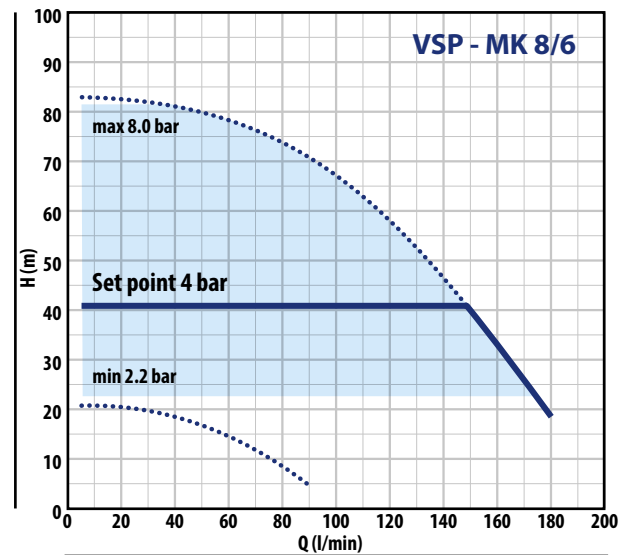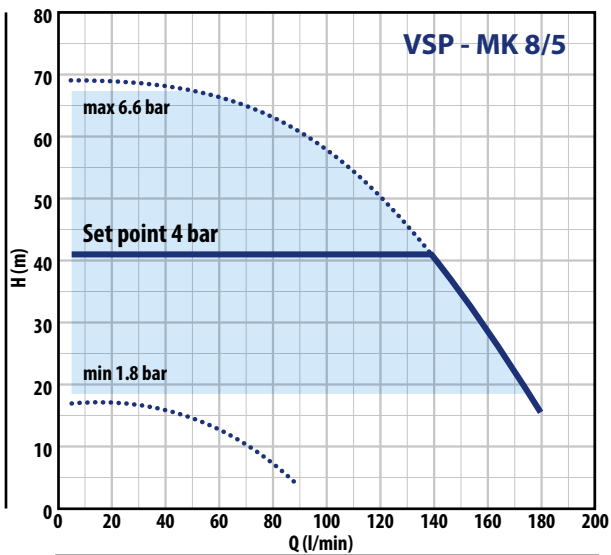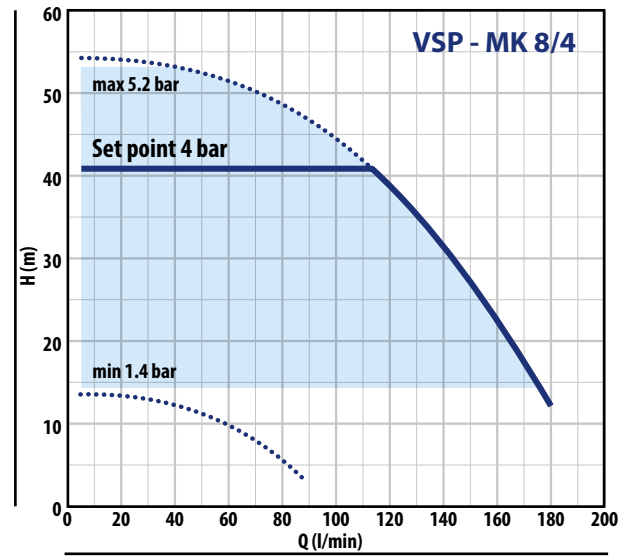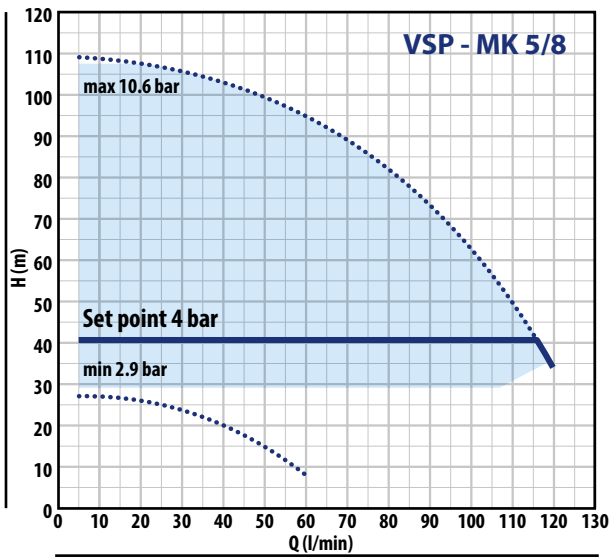

## DIMENSIONS AND WEIGHT

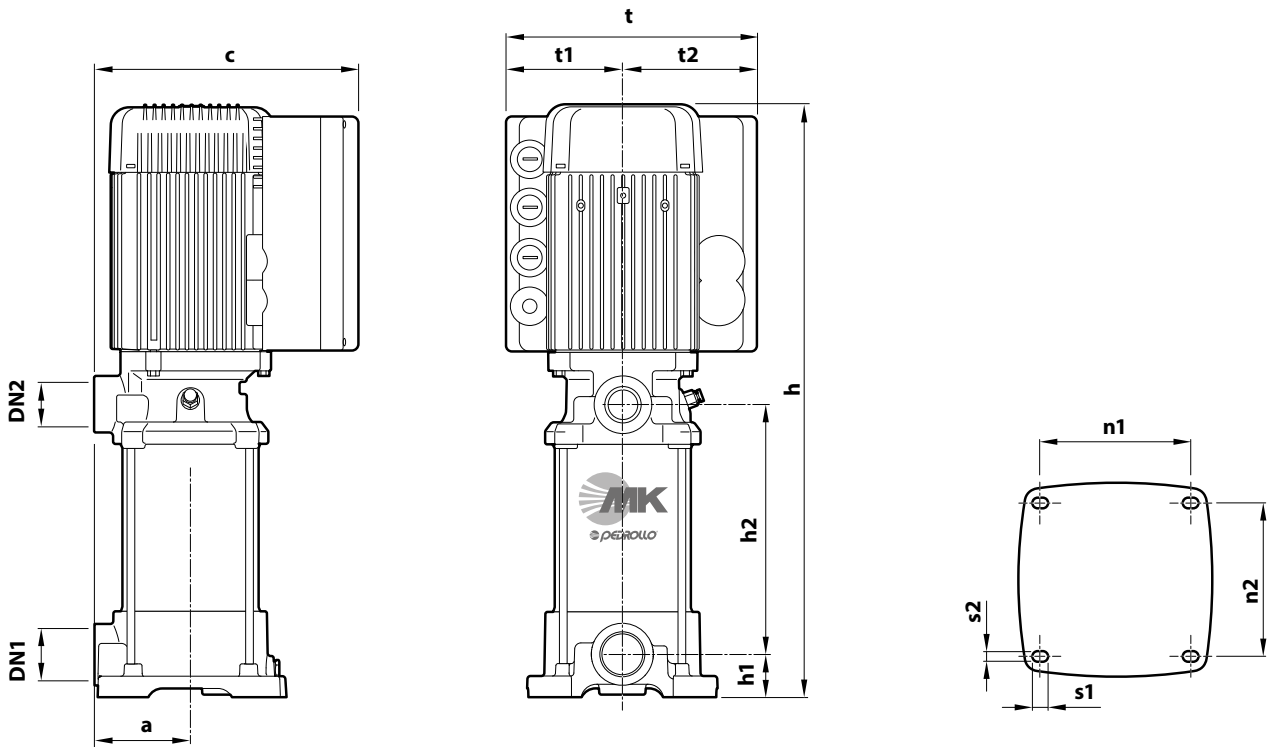

Single-phase	TYPE Three-phase	PORTS		DIMENSIONS mm												kg	
		DN1	DN2	a	c	h	h1	h2	t	t1	t2	n1	n2	s1	s2	1~	3~
VSPm - MK 3/3	VSP - MK 3/3	1 1/4"	1"	93	255	447	41	132	242	113	129	143	146	14.5	10	23.3	23.3
VSPm - MK 3/5	VSP - MK 3/5					501		186								25.5	25.5
VSPm - MK 3/6	VSP - MK 3/6					528		213								27.3	27.3
VSPm - MK 5/4	VSP - MK 5/4					474		159								23.8	23.8
VSPm - MK 5/5	VSP - MK 5/5					501		186								25.2	25.2
VSPm - MK 5/7	VSP - MK 5/7					555		240								28.3	28.3
-	VSP - MK 5/8					602		267								-	28.6
VSPm - MK 8/4	VSP - MK 8/4					474		159								26.6	26.6
VSPm - MK 8/5	VSP - MK 8/5					501		186								27.0	27.0
-	VSP - MK 8/6					548		213								-	29.4