

# Cast Iron, Ni-Resist or Silver Series XL®

Series 1502 6-Roller



- Max. fluid temperature: 60°C
- Port size: 1½ inch NPT
- Housing: Cast Iron (C), Ni-Resist (N) or Silvercast (XL)
- Pump shaft rotation: CCW (CW available)\*
- Weight: 13,6 kg
- Rollers: Super rollers standard [Poly (T3) and Teflon (T2) available]
- Shaft Seals: Buna-N standard on Cast Iron and Ni-Resist [Viton (Q) available]; Viton standard on Silver Series XL® [Buna-N (M) available]
- Available PTO adapters (forged steel recommended): See page 67
- Rotor: Cast Iron, Ni-Resist or Silvercast

Pressure	LPM	HP	LPM	HP	LPM	HP
	@540 RPM		@600 RPM		@1000 RPM	
0 BAR	125	,51	139	,66	235	2,02
1,7 BAR	112	1,02	127	1,15	221	3,04
3,4 BAR	105	1,45	120	1,68	215	3,69
6,9 BAR	92	2,46	107	2,78	204	5,31
10,3 BAR	79,5	3,54	94,6	3,95	193	7,12


### Order Information

Model Number	Max LPM	Max BAR	Max RPM	Shaft Output
1502C	235	13,7	1000	1½ inch solid shaft (23,8 mm)
1502N				
1502XL				

Teflon rollers - Add Suffix "T2" - (i.e.: 1502C-T2).  
 Polypropylene rollers - Add Suffix "T3" - (i.e.: 1502C-T3).  
 Buna-N seals - Add Suffix "M" - (i.e.: 1502C-M).  
 Reverse rotation\* - Add Suffix "R" - (i.e.: 1502C-R).

# Cast Iron or Silver Series XL®, Gas Engine-Driven

Models: 4101C-25A, 4101XL-25A

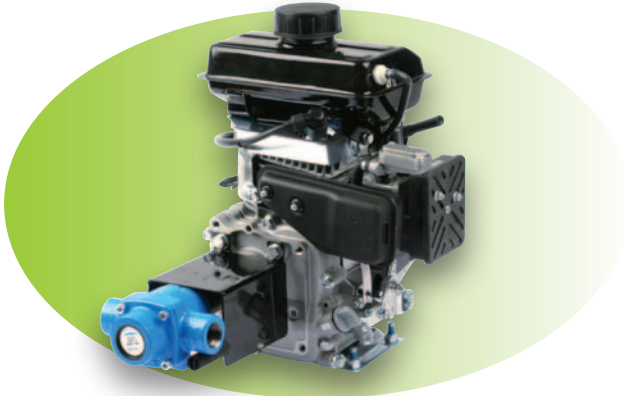

- 2,5 HP PowerPro™ Engine
- Port size: ¾ inch NPT
- Housing: Cast Iron (C) or Silvercast (XL)
- Pump shaft rotation: CW
- Weight: 13,2 kg
- Rollers: Super rollers standard [Poly (T3), Teflon (T2) and Buna-N (M) available]
- Shaft Seals: Viton standard
- Rotor: Cast Iron (C) or Silvercast (XL)

BAR	LPM
0	8,9
3,4	8,6
6,9	8,3
10,3	8,0

### Order Information

Model Number	Max LPM	Max BAR	Engine Mfg. & HP
4101C-25A	33,0	6,8	PowerPro™ 2,5 hp
4101XL-25A		10,3	

NOTE: PowerPro engine is *not* European Community labeled.

\* CCW (counterclockwise) and CW (clockwise) are determined when looking at the shaft end.