


Hydraulically-Driven Cast Iron, Ni-Resist or Silver Series XL®

Series 7560-GM30 8-Roller

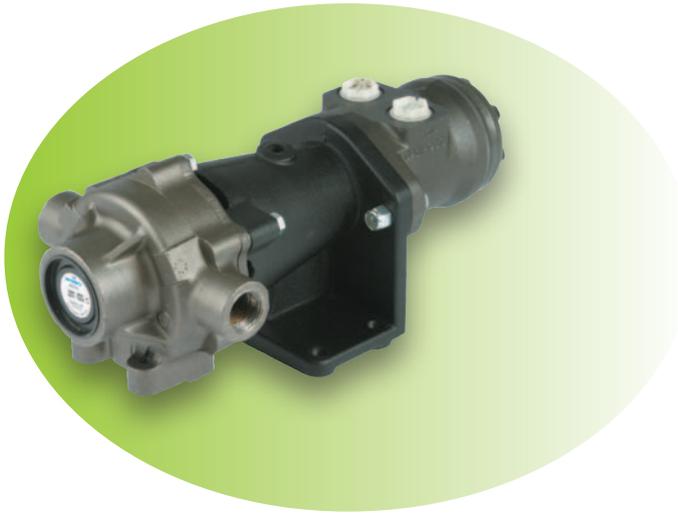

- Hydraulic motor drive (for open centre, closed centre and load-sensing systems)
- Max. fluid temperature: 60°C
- Pump port size: ¼ inch NPT
- 1 inch hose barb inlet fitting for 1000 rpm operation
- Housing: Cast Iron (C), Ni-Resist (N) or Silvercast (XL)
- Rollers: Super Rollers standard [Poly (T3), Teflon (T2) and Buna-N (G) available]
- Shaft Seals: Viton standard [Buna-N (M) available]
- Rotor: Cast Iron, Ni-Resist or Silvercast
- Motor port size: -10 SAE (7/8 inch- 14 inch UNF)

Order Information

Model Number	Max LPM	Max BAR	Max RPM	Motor Capacity
7560C-GM30	76	20,6	1000	45 LPM hydraulic flow max
7560N-GM30				
7560XL-GM30				

Teflon rollers - Add Suffix "T2" - (i.e.: 560C-GM-30-T2).

Polypropylene rollers - Add Suffix "T3" - (i.e.: 7560C-GM-30-T3).

Buna-N seals - Add Suffix "M" - (i.e.: 7560C-GM30-M).

7560N-GM30

Hyd. LPM	LPM at 0 BAR	LPM at 2 BAR	LPM at 4 BAR	LPM at 6 BAR	LPM at 8 BAR	LPM at 10 BAR	LPM at 12 BAR	LPM at 14 BAR	LPM at 16 BAR	LPM at 18 BAR	LPM at 20 BAR
20	35,8	33,2	30,5	28,1	25,6	23,4	20,9	18,5	15,8	12,6	10,0
25	42,8	39,5	36,8	34,0	31,8	29,2	26,2	23,7	21,6	18,9	16,4
30	51,8	49,0	45,8	43,0	40,3	37,9	35,3	33,3	31,1	28,9	26,2
35	58,1	55,8	52,7	50,1	47,7	45,5	43,1	40,9	38,8	36,3	33,5
40	67,6	64,8	62,4	60,0	57,7	55,8	53,4	51,3	48,8	46,6	44,1
45	75,3	72,7	70,4	68,1	66,0	63,8	61,8	59,8	57,8	55,7	53,3