


Big Twin®

Models 5206C and 5206C-H

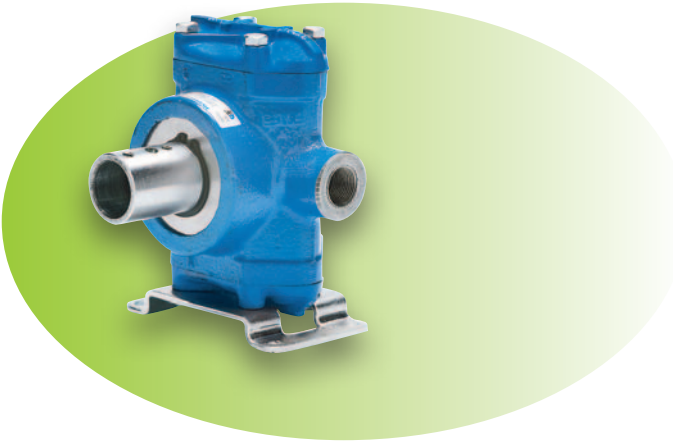

- Port sizes: 3/4 inch inlet, 3/4 inch outlet
- Max. fluid temperature: 60°C
- Weight: 8,2 kg
- Pump shaft rotation: bi-rotational
- Cups: Leather standard [fabric-reinforced (F) and Buna-N (R) available]
- Recommended to be used with Pulsation Dampener 3375-0017-2

Order Information


Pressure	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP
	@400 RPM		@500 RPM		@540 RPM		@600 RPM		@700 RPM		@800 RPM	
1,7 BAR	14,8	,26	18,5	,29	20,4	,31	22,7	,34	26,5	,40	30,3	,46
6,9 BAR	14,8	,40	18,9	,46	20,4	,50	22,7	,56	26,5	,65	29,9	,74
13,8 BAR	15,1	,66	18,9	,75	20,4	,81	22,7	,90	26,1	1,1	29,5	1,2
20,9 BAR	14,8	,89	18,9	1,1	20,1	1,2	22,3	1,3	26,1	1,5	29,1	1,7
27,6 BAR	14,8	1,1	18,5	1,4	20,1	1,5	22,3	1,6	26,1	1,9	29,1	2,2

Model Number	Max LPM	Max BAR	Max RPM	Shaft Output
5206C	30,3	27,5	800	1 inch solid shaft w/base
5206C-H				1-3/4 inch hollow shaft w/base
3430-0037	Leather cup kit			

Fabric Cups - Add Suffix "F" - (ie.: 5206C-F).
 Buna-N Cups - Add Suffix "R" - (ie.: 5206C-R).

Big Twin®

Models 5210C and 5210C-H

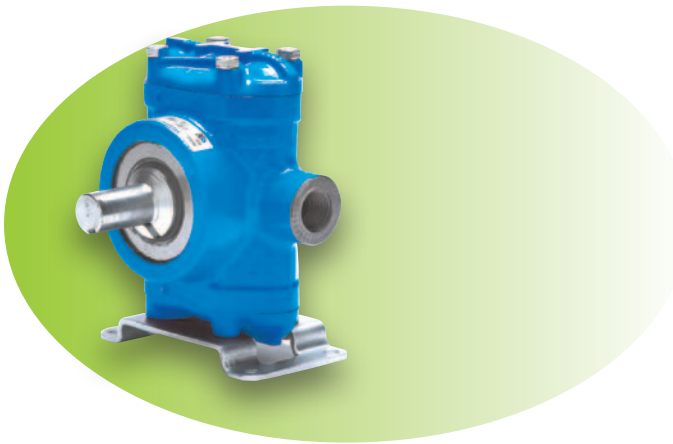

- Port sizes: 3/4 inch inlet, 3/4 inch outlet
- Max. fluid temperature: 60°C
- Weight: 8,2 kg
- Pump shaft rotation: bi-rotational
- Cups: Leather standard [fabric-reinforced (F) and Buna-N (R) available]
- Recommended to be used with Pulsation Dampener 3375-0015-2

Pressure	LPM	HP	LPM	HP	LPM	HP	LPM	HP
	@400 RPM		@500 RPM		@540 RPM		@600 RPM	
1,7 BAR	27,6	,39	33,7	,57	35,6	,66	37,9	,73
6,9 BAR	27,6	,69	33,7	,87	35,6	,94	37,5	1,10
13,8 BAR	27,2	1,2	33,3	1,5	35,2	1,6	37,5	1,7
20,7 BAR	27,2	1,7	33,3	2,0	35,2	2,2	37,1	2,3
27,6 BAR	27,2	2,1	32,9	2,6	34,8	2,7	37,1	3,0