




VALVOLE A SFERA MANUALI MANUAL BALL VALVES VALVULAS DE BOLA MANUALES

453

Valvole a sfera con tiranti, 2 vie con attacco filettato


2-way ball valves with tie-rods and threaded coupling

Válvulas de bola con tirantes, 2 vías con toma roscada



PP BALL

| COD. CODE Cód. | Pressure | | F BSP | DN mm | L mm | A mm | B mm | C mm | D mm | X mm | Y mm |
|----------------|----------|-----|----------|----------|---------|---------|---------|---------|---------|---------|---------|
| | bar | PSI | | | | | | | | | |
| 45300 4A44 | 16 | 230 | 1" F | 25 | 23 | 101 | 42 | 79 | 100 | 33 | 38 |
| 45300 4A55 | | | 1 1/4 F | 32 | 25 | 105 | 42 | 79 | 100 | 33 | 38 |
| 45300 5A66 | 10 | 150 | 1 1/2 F | 40 | 25 | 128 | 52 | 94 | 130 | 40 | 49 |
| 45300 5A77 | | | 2" F | 40 | 25 | 134 | 52 | 94 | 130 | 40 | 49 |
| 45300 6A77 | 8 | 120 | 2" F | 50 | 28 | 150 | 61 | 110 | 150 | 57 | 60 |
| 45300 7A88 | | | 2 1/2 F | 65 | 33 | 168 | 71 | 125 | 200 | 72 | 80 |
| 45300 7A99 | 8 | 120 | 3" F | 65 | 36 | 174 | 71 | 125 | 200 | 72 | 80 |
| 45300 5E66 | 10 | 150 | 1 1/2 M | 40 | 24 | 143 | 52 | 94 | 130 | 40 | 49 |
| 45300 6E77 | | | 2" M | 50 | 27 | 174 | 61 | 110 | 150 | 57 | 60 |
| 45300 7E88 | 8 | 120 | 2 1/2 M | 65 | 32 | 206 | 71 | 125 | 200 | 72 | 80 |
| 45300 7E99 | | | 3" M | 65 | 35 | 212 | 71 | 125 | 200 | 72 | 80 |

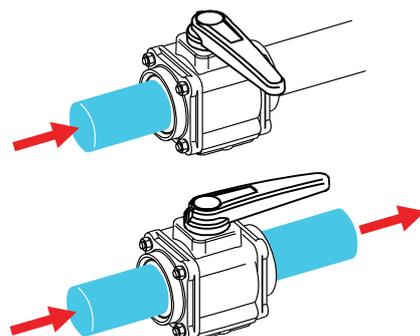

UHMW BALL

| COD. CODE Cód. | Pressure | | F BSP | DN mm | L mm | A mm | B mm | C mm | D mm | X mm | Y mm |
|----------------|----------|-----|----------|----------|---------|---------|---------|---------|---------|---------|---------|
| | bar | PSI | | | | | | | | | |
| 45340 4A44 | 16 | 230 | 1" F | 25 | 23 | 101 | 42 | 79 | 100 | 33 | 38 |
| 45340 4A55 | | | 1 1/4 F | 32 | 25 | 105 | 42 | 79 | 100 | 33 | 38 |
| 45340 7A88 | 8 | 120 | 2 1/2 F | 65 | 33 | 168 | 71 | 125 | 200 | 72 | 80 |
| 45340 7A99 | | | 3" F | 65 | 36 | 174 | 71 | 125 | 200 | 72 | 80 |
| 45340 7E88 | 8 | 120 | 2 1/2 M | 65 | 32 | 206 | 71 | 125 | 200 | 72 | 80 |
| 45340 7E99 | | | 3" M | 65 | 35 | 212 | 71 | 125 | 200 | 72 | 80 |

AISI 316 BALL

| COD. CODE Cód. | Pressure | | F BSP | DN mm | L mm | A mm | B mm | C mm | D mm | X mm | Y mm |
|----------------|----------|-----|----------|----------|---------|---------|---------|---------|---------|---------|---------|
| | bar | PSI | | | | | | | | | |
| 45320 4A44 | 16 | 230 | 1" F | 25 | 23 | 101 | 42 | 79 | 100 | 33 | 38 |
| 45320 4A55 | | | 1 1/4 F | 32 | 25 | 105 | 42 | 79 | 100 | 33 | 38 |
| 45320 5A66 | 10 | 150 | 1 1/2 F | 40 | 25 | 128 | 52 | 94 | 130 | 40 | 49 |
| 45320 5A77 | | | 2" F | 40 | 25 | 134 | 52 | 94 | 130 | 40 | 49 |
| 45320 6A77 | 8 | 120 | 2" F | 50 | 28 | 150 | 61 | 110 | 150 | 57 | 60 |
| 45320 7A88 | | | 2 1/2 F | 65 | 33 | 168 | 71 | 125 | 200 | 72 | 80 |
| 45320 7A99 | 8 | 120 | 3" F | 65 | 36 | 174 | 71 | 125 | 200 | 72 | 80 |
| 45320 5E66 | 10 | 150 | 1 1/2 M | 40 | 24 | 143 | 52 | 94 | 130 | 40 | 49 |
| 45320 6E77 | | | 2" M | 50 | 27 | 174 | 61 | 110 | 150 | 57 | 60 |
| 45320 7E88 | 8 | 120 | 2 1/2 M | 65 | 32 | 206 | 71 | 125 | 200 | 72 | 80 |
| 45320 7E99 | | | 3" M | 65 | 35 | 212 | 71 | 125 | 200 | 72 | 80 |

