
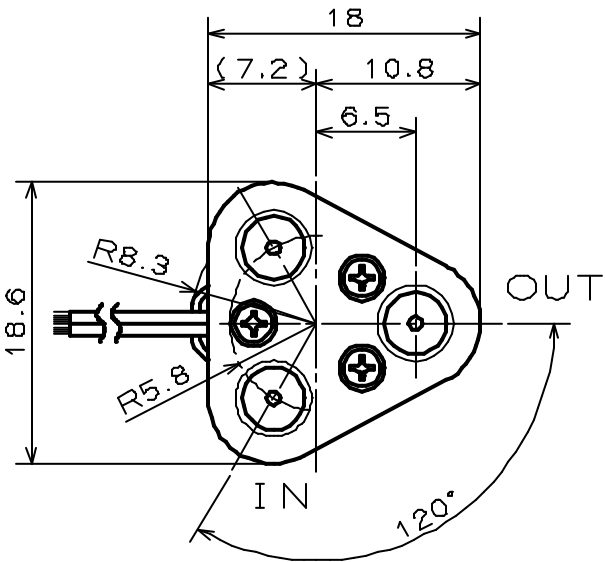


FOR REFERENCE
ONLY

SOLENOID VALVE

SPECIFICATIONS for MODEL EXAKN-2F-NC

- ORIFICE DIAMETER : 0.8mm
- PORT CONNECTION : M5
- OPERATING PRESSURE RANGE : IN -40 ~ 300kPa
{-300mmHg ~ 3bar}
- OUT 0 ~ 150kPa
{0 ~ 1.5bar}
- FLUID MEDIA : FLUIDS CHEMICALLY COMPATIBLE
WITH MATERIALS BELOW
- MEDIA TEMPERATURE RANGE : 0 ~ 60°C
- AMBIENT TEMPERATURE RANGE : 0 ~ 60°C
- RATED VOLTAGE : 12VDC, 24VDC
- POWER CONSUMPTION : 1.2W
- DUTY CYCLE : CONTINUOUS
- COIL TEMPERATURE INCREASE : MAX. 47°C FROM ROOM TEMPERATURE
- INSULATION CLASS : CLASS B
- DIELECTRIC STRENGTH : 1500VAC FOR 60s

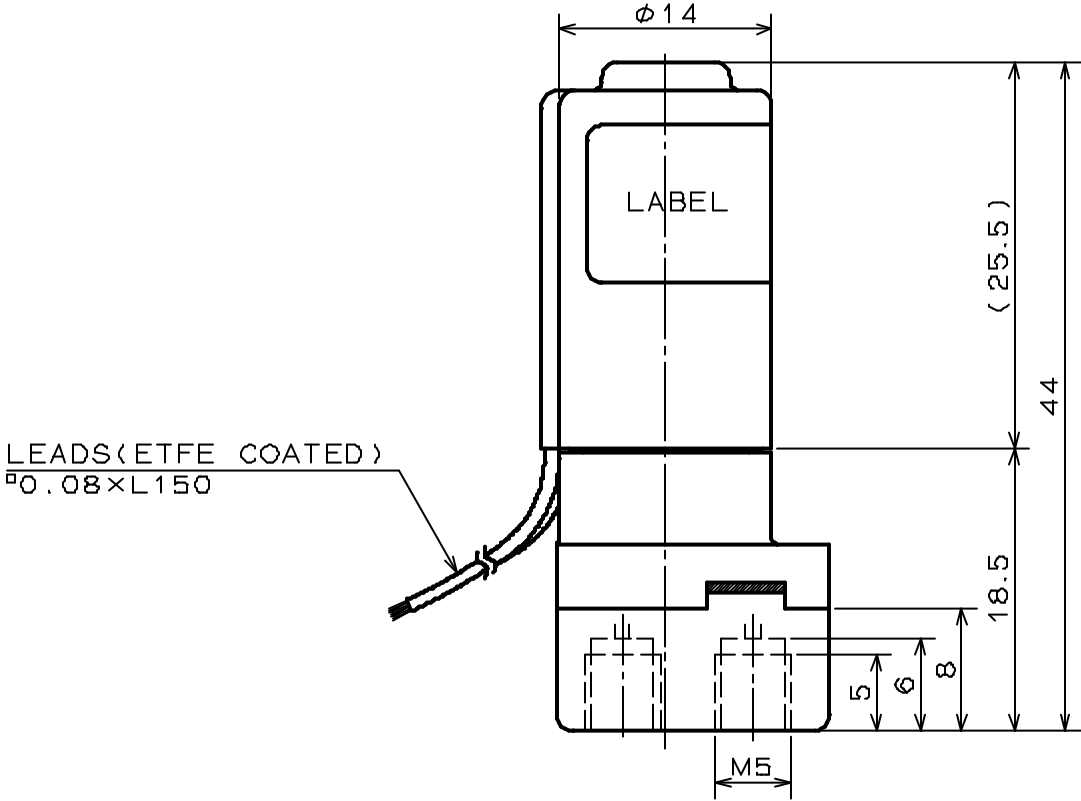

WETTED MATERIALS

DIAPHRAGM	PTFE	2	
VALVE BODY A	ETFE	1	
RETAINER	DAIEL ₆ PERFLUOR	1	
STOPPER	PVDF	2	
VALVE BODY B	ETFE	1	
SPRING CASE	PVDF	1	
GASKET	DAIEL ₆ PERFLUOR	1	
M5 BODY	PVDF	1	
PART NAME	MATERIAL	REQD.	NOTE

SOLENOID VALVE
EXAKN-2F-NC