



General Accessories

DN 10

dirt strainers

DN 17

Typical data/functional ranges

Construction	mechanical filter	
Fitting position	preferably filter element pointing downwards	
Media	cold and heated potable water and physically and chemically similar media	
T-Medium	90	°C max.
DN	10 / 17	mm
p-Operating	10	bar max.
Admissible pressure loss	6	bar max.

12.010



mesh size 0,16 / 0,25 mm

12.017



mesh size 0,08 / 0,11 / 0,25 mm

Materials

Body / inner parts	PA 66 / stainless steel
Seals	EPDM NBR on request
Filter	PA 66 stainless steel
Mesh size / wire diameter	0,08 mm / 0,06 mm Ø to 0,25 mm / 0,10 mm Ø

42.010



pressure reducer

Typical data/functional ranges

Media	cold and heated potable water and physically and chemically similar media	
Flow restriction	0,5 - 22	l/min
T-Medium	65 - 98	°C max.
Ø	9,5 / 19	mm
p-Operating	10	bar max.

MR 04

flow regulators

MR 19



MR 05

65°C max.



MR 06



MR 07



MR 12




90°C max.



98°C max.

Materials

Sockets	PA, POM, PA 6/6, PEI
Seals	EPDM NBR on request

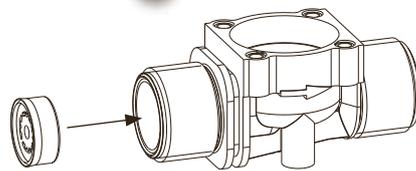

check valves for potable water

