


E-X (FULL CONE NOZZLES / WIDE PASSAGE)



SPIRAL NOZZLES / WIDE FREE PASSAGE


The E-X series nozzles, with their typical elongated spiral design, work on the impact principle, by deflection of a water stream onto their spiral profile that provides the desired spray angle. Their specific shape with no internal parts leaves a larger internal free passage suitable to work with higher capacities and for higher clog resistance than other nozzles of the same size.

The capacity values on darker background can be obtained with metal nozzles only as plastic nozzles cannot ensure resistance in harsh operating conditions. If the capacity values you are looking for are those on darker background, we recommend to choose metal nozzles for their longer operating life.

THREAD SPECIFICATION: BSPT, NPT



Spray section



Convex distribution



120°	CODE	RG inch	D mm	D1 mm	Capacity at different pressure values (l/min) (bar)							Dimensions mm		
					0.7	1.0	2.0	3.0	5.0	7.0	10	H	H1	WS
TYPICAL APPLICATIONS Gas cooling Exhaust scrubbers Desulfurization Cooling Other applications: Spray of chemicals Fire prevention Fire suppression	ECW 2230 xx Xy	3/8"	4.8	4.8	11.4	13.6	19.2	23.5	30.3	35.9	42.9	70	15	22
	ECW 2317 xx Xy		5.6	5.6	15.3	18.3	25.9	31.7	40.9	48.4	57.9			
	ECW 2410 xx Xy		6.4	6.4	20.0	24.0	33.9	41.5	53.6	63.4	75.8			
	ECW 2640 xx Xy		7.9	7.9	31.2	37.3	52.7	64.6	83.4	98.7	118			
	EDW 2940 xx Xy	1/2"	9.5	9.5	45.6	54.5	77.1	94.4	122	144	172	86	18	27
	EDW 3128 xx Xy		11.1	11.1	61.8	73.9	105	128	165	196	234			
	EEW 3165 xx Xy	3/4"	12.7	12.7	79.7	95.3	135	165	213	252	301	130	20	27
	EFW 3260 xx Xy	1"	16.0	16.0	126	150	212	260	336	397	475	131	26	34
	EFW 3372 xx Xy		19.0	19.0	180	215	304	372	480	568	679	168	26	34
	EHW 3507 xx Xy	1 1/2"	22.2	22.2	245	293	414	507	655	774	926	171	27	50
	EHW 3663 xx Xy		25.4	25.4	320	383	541	663	856	1013	1210	185	27	50
	EHW 3747 xx Xy		28.6	28.6	361	431	610	747	964	1141	1364	185	27	50
EKW 4109 xx Xy	2"	35.0	35.0	527	629	890	1090	1407	1665	1990	279	32	65	
EKW 4139 xx Xy		38.1	38.1	672	803	1136	1391	1796	2125	2540	279	32	65	
EMW 4204 xx Xy	3"	44.5	44.5	985	1178	1666	2040	2634	3116	3725	267	32	90	
EMW 4265 xx Xy		51.0	51.0	1280	1530	2164	2650	3421	4048	4838	267	32	90	
EPW 4412 xx Xy	4"	63.5	63.5	1990	2379	3364	4120	5319	6293	7522	293	36	115	

ES / SILICON CARBIDE NOZZLES

PNR designs and supplies spiral nozzles made out of several types of silicon carbide for applications where fluids containing abrasive solid particles must be sprayed and long nozzle service life is required.



HOW TO MAKE UP THE NOZZLE CODE

Spiral nozzles with extra wide internal passage are widely used in pollution treatment and can be supplied with customized connections. Please refer to the picture of Silicon carbide nozzles on the left. Locknut fitting makes assembly easier and more convenient. This design, the only one possible for Silicon carbide nozzles, is optional for nozzles cast in alloys or stainless steel. To identify such nozzles, please note the following product coding.

EHW 3747 xx Xy


xx = Material code, see MATERIAL table

y = CONNECTION CODE
 B - BSPT, Male thread
 N - NPT, Male thread
 F - Locknut fitting

ES / SILICON CARBIDE NOZZLES

HOW TO MAKE UP THE NOZZLE CODE

Ex.: ECW 2230 B31 XB

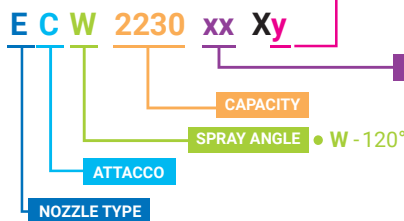

- B31 - AISI 316L Stainless steel
- T1 - Brass
- D1 - PVC
- D2 - PP
- D8 - PVDF
- E1 - PTFE
- LB - Hastelloy C 276
- Other materials on request