

TANKS

SAFETY BUNDS

Data Sheet

PE tanks for chemical mixing and dosing system.
With level indicator.

Tanks can be assembled with:

- metering pumps
- suction lances
- mixers
- feed water valve
- outgassing pump hose
- outgassing valve on the higher top side.
- bleed water valve

Dummy holes ensure chemical isolation.

All dosing station components assembled on are enclosed into tank diameter.

Mixers screwed on **thread metal insert** are **tilted** for better central mixing.


Stainless Steel (AISI 316) fixing screws with rubber cap.

OPTION

- Feed water valve (1/2" or 3/4")
- Bleed water valve (1/2" or 1")
- Outgassing valve

Temperature..... 0-40° C (32-104°F)

Material PE

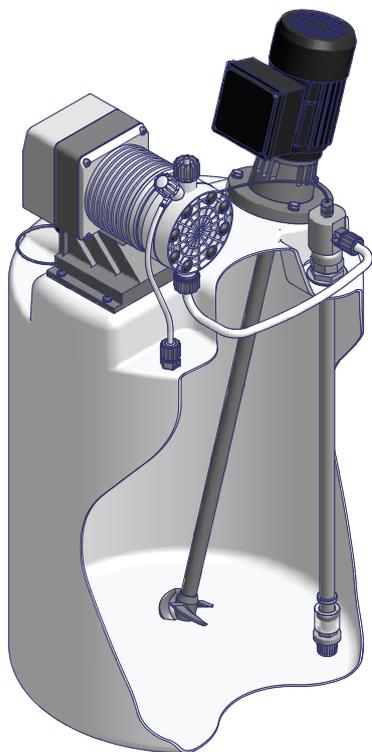

DOSING STATION

Pre-assembled dosing station with:

- 1 metering pump (or 2, if any mixer)
- 1 mixer
- 1 feed water valve
- 1 outgassing valve
- 1 or 2 suction lances
- 1 bleed water valve
- 2 probe filters (if any mixer)

If 2 metering pumps are assembled on, install a suction lance with double suction input and a KDPV connection kit.

The table below lists EMEC components you can choose for dosing station.

Tank model	Metering pump (mod.)	Mixer (mod.)	Suction lance
CNT50	<ul style="list-style-type: none"> • V (with bracket) • K 	<ul style="list-style-type: none"> • MIX MAN 	<ul style="list-style-type: none"> • LASP4 (40 cm) • LASP5 (40 cm)
CNT120	<ul style="list-style-type: none"> • V (with bracket) • K • A • T (with bracket) 	<ul style="list-style-type: none"> • MIX8N • MIXV8N 	<ul style="list-style-type: none"> • LASP4 (63 cm) • LASP5 (63 cm)
CNT250 *	<ul style="list-style-type: none"> • V (with bracket) • K • A • T (with bracket) 	<ul style="list-style-type: none"> • MIX8N • MIXV8N • MIX4N • MIXV4N • MIXV2N 	<ul style="list-style-type: none"> • LASP4 (75 cm) • LASP5 (75 cm)
CNT500 *	<ul style="list-style-type: none"> • V (with bracket) • K • A • T (with bracket) 	<ul style="list-style-type: none"> • MIX8N • MIXV8N • MIXV4N • MIX4N • MIXV2N 	<ul style="list-style-type: none"> • LASP4 (108 cm) • LASP5 (108 cm)
CNT1000	<ul style="list-style-type: none"> • V (with bracket) • K • A • T (with bracket) 	<ul style="list-style-type: none"> • MIX4N • MIXV2N • MIX2 	<ul style="list-style-type: none"> • LASP4 (120 cm) • LASP5 (120 cm)

* Models set for 2 suction lances.

EMEC

ISO 9001:2008
ISO 14001:2004
OHSAS 18001:2007




Via Donatori di sangue, 1 - 02100 Vazia (RI) - Italy
Tel. +39 0746 2284 1 - Tel. +39 0746 1725114 - Fax +39 0746 2284 2 - <http://www.emec.it>

Specifications subject to change without notice.
EN R1-04-13

TANKS SAFETY BUNDS

Data Sheet

DIMENSIONS

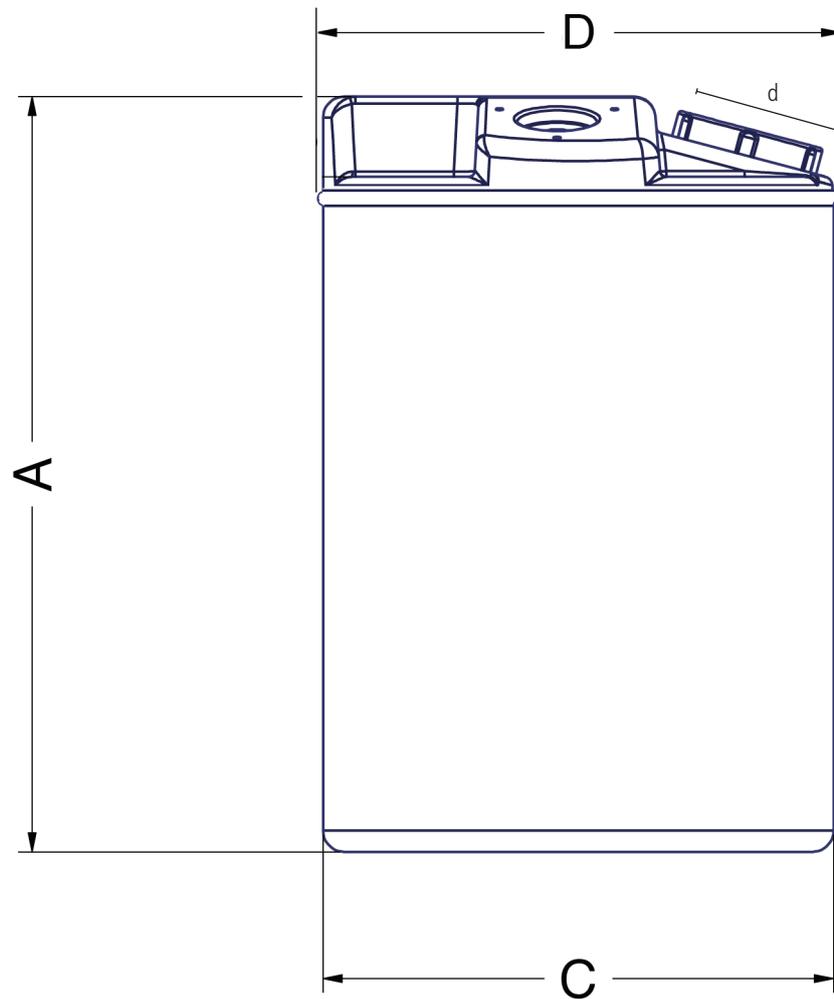

Model	Litres	A	C	D
CNT50	50	505	∅ 420	-
CNT120	120	735	∅ 495	∅ 505
CNT250	250	850	∅ 610	-
CNT500	500	1200	∅ 780	-
CNT1000	1000	1240	∅ 1120	-

Measures in mm.

HOLES DIMENSIONS

Model	Chemical load (d)	Feed water valve	Bleed water valve	Outgassing valve	Suction lance	Pump outgassing hose
CNT50	95 mm	1/2" threaded	1/2" threaded	1/2" threaded	1 1/2" threaded	1/2" 4x6
CNT120	120 mm	1/2" threaded	1/2" threaded	1/2" threaded	1 1/2" threaded	1/2" 4x6
CNT250	120 mm	1/2" threaded	1/2" threaded	1/2" threaded	1 1/2" threaded	1/2" 4x6
CNT500	150 mm	1" threaded	1" threaded	1/2" threaded	1 1/2" threaded	1/2" 4x6
CNT1000	260 mm	1" threaded	1" threaded	1/2" threaded	1 1/2" threaded	1/2" 4x6

EMEC

ISO 9001:2008
ISO 14001:2004
OHSAS 18001:2007



Via Donatori di sangue, 1 - 02100 Vazia (RI) - Italy
Tel. +39 0746 2284 1 - Tel. +39 0746 1725114 - Fax +39 0746 2284 2 - <http://www.emec.it>

Specifications subject to change without notice.
EN R1-04-13

TANKS


SAFETY BUNDS

PE safety bunds for "CNT" tanks.

Reinforced collar for increasing security.

Temperature..... 0-40° C (32-104°F)

Material..... PE

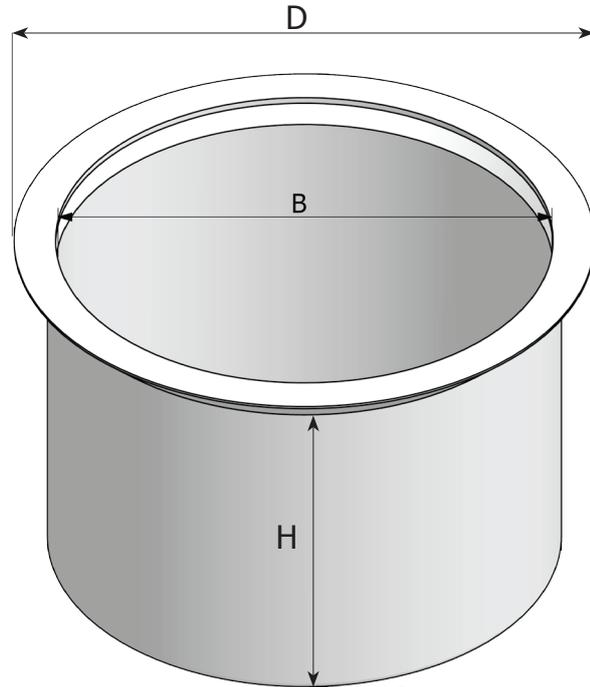

Model	Litres	D	B	H	Tank model
COS50	60	510	430	425	CNT50
COS120	120	545	520	615	CNT120
COS250	300	695	660	875	CNT250
COS500	600	840	820	1095	CNT500
COS1000	1500	1240	1150	1250	CNT1000

Measures in mm.