


FEATURES

- Level switch (double level probes available)
- Foot valve and foot filter
- Adjustable height
- 1 1/4" pipe fitting
- PVC body
- Up to 4 suction input available

SPECIFICATIONS

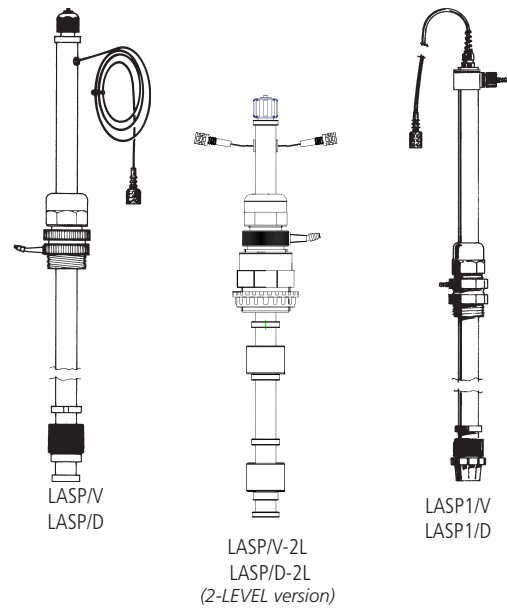

MODELS	
LASP3	LASP - Fittings 3/8"
LASP1	LASP1 - Fittings 1/2"

O-RING	
V	Viton *
D	Ethylene Propylene

LENGTH cm	
045	45
046	46
060	60
072	72
080	80
090	90
010	115

INPUTS (suction)	
1	1
2	2
3	3
4	4

FITTING AND HOSE	
0	3/8" and 4x6
1	3/8" and 6x8
2	3/8" and 4x8
3	1/2" and 4x6
4	1/2" and 6x8
5	1/2" and 8x12
A	1/2" and 8x10

LEVEL - CONTACT - CONNECTOR	
0	Level - N.O. contact - BNC
1	Level - N.O. contact - without BNC
4	without level
5	2 levels at 20cm* - BNC
7	2 levels at 20cm* - without BNC
8	2 levels at 10cm* - BNC

* Specify on order the distance between 2 levels.

FILTER	
0	EMEC filter (LASP3)
1	ILMAP filter (LASP1)

Model	LASP1	V	060	0	1	0	0	004	1
-------	-------	---	-----	---	---	---	---	-----	---

Viton® is a registered trademark of DuPont Dow Elastomers.

EMEC

ISO 9001:2008
ISO 14001:2004
OHSAS 18001:2007




Via Donatori di sangue, 1 - 02100 Vazia (RI) - Italy
Tel. +39 0746 2284 1 - Fax +39 0746 2284 2 - <http://www.emec.it>

Specifications subject to change without notice.
ENG R1-09-10

DIMENSIONS


OPERATING LENGTH (C)	TOTAL LENGTH (A)	TOTAL LENGTH (B)	TANK CONTENTS LITRES
45 cm	60 cm	61 cm	25 lt
46 cm	61 cm	62 cm	60 lt (mod. CNT06)
60 cm	75 cm	76 cm	100 lt (mod. CNT1N)
72 cm	87 cm	88 cm	200 lt (mod. CNT2N)
80 cm	95 cm	96 cm	300 lt (mod. CNT3N)
90 cm	105 cm	106 cm	500 lt (mod. CNT5N)
115 cm	130 cm	131 cm	1000 lt (mod. CNT10N)

LASP3/V e LASP3/D

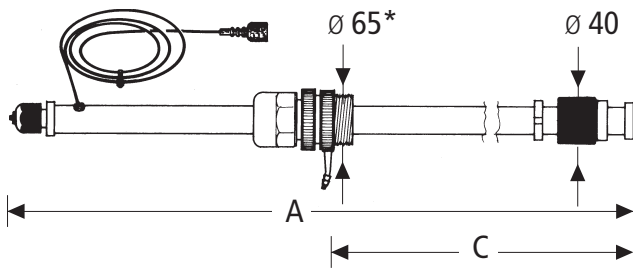

* Ø 45 for "45 cm" operating length model

LASP1/V e LASP1/D

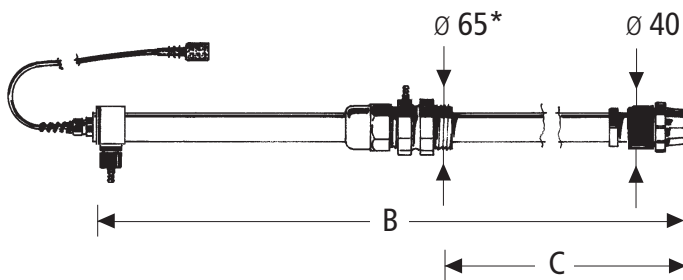

* Ø 45 for "45 cm" operating length model