



DEBEM

— MADE IN ITALY —



INDUSTRIAL PUMPS

GENERAL CATALOGUE



Officially engaged
with technology.





Debem is Official Sponsor of
Monster Energy Yamaha MotoGP

Debem S.r.l. has chosen to become **Official Sponsor of Monster Energy Yamaha MotoGP**. Debem is proud to be part of the **MotoGP World Champion Team**, sharing founding values such as **performance, technology, precision and efficiency**.

The three-year contract that joins Debem to the currently MotoGP World Champion Team represents a clear declaration of intent on how the company is projected to the challenges of the future.

Monster Energy Yamaha MotoGP welcomes new Official Sponsor Debem

Yamaha Motor Racing and the **Monster Energy Yamaha MotoGP team** have formed a new strong alliance with **Debem**, producer of industrial pumps. Together they will be striving for high performance and efficiency during the **2022 MotoGP World Championship**.

Gerno di Lesmo (Italy), 28th February 2022
 Yamaha Motor Racing and the Monster Energy Yamaha MotoGP Team are delighted to announce Debem as their new Official Sponsor for 2022-2023-2024. Debem is a cutting-edge company specialised in designing, constructing, and producing industrial pumps for highly demanding environments. Debem has 40 years of experience in the fluid transfer

and movement sector and has become a market leader thanks to the company's innovative and unique product designs as well as their ethical testing of their products' quality and performance. As Yamaha Motor Racing and Debem share the same drive to be global market leaders and innovators in their respective sectors, the match between the two companies is a perfect fit.



LIN JARVIS

MANAGING DIRECTOR,
 YAMAHA MOTOR RACING

It is always a pleasure to welcome a new partner onboard our racing program and we are very pleased to introduce new Official Sponsor Debem.

The Monster Energy Yamaha MotoGP Team base is at Yamaha Motor Racing's Headquarters in Gerno di Lesmo, where most of the preparation takes place for our trackside activities. YMR's technical staff will be using Debem products on a daily basis in our workshops and engine maintenance facilities.

Debem shares our desire and motivation to continuously improve the performance and the efficiency in the working environment by developing tailor made high-tech solutions.



MARCO DE BERNARDI

PRESIDENT,
 DEBEM

The idea of a connection between Debem and Monster Energy Yamaha MotoGP is the epitome of our common goals, sharing founding values such as performance, technology, precision and efficiency.

Values on which the Yamaha MotoGP team delivers big time in his sporting activity, with the recently conquered World Title being just one of its many achievements.

Our obsession with research and development of new solutions in the industrial sector, combined with the worldwide extension of our market, perfectly combine with the evolved, dynamic and winning image of Yamaha Factory Racing.

Index

COMPANY

6

- Who we are **06**
- Why choose us **08**
- The structure **09**
- Global network **10**

PRODUCTS

12

- Our products **12**
- Main application sectors **13**
- ATEX compliance **16**
- IECEX compliance **17**
- Main advantages **18**
- Cubic mini diaphragm pumps and **19**
- Boxer diaphragm pumps
- Patented exchanger **20**
- Membrane Long Life **21**
- How does it work? **22**
- Installations **23**

CUBIC

24

- Midgetbox **25**
- Cubic 15 **26**

BOXER

28

- Boxer 7 **29**
- Boxer 15 **30**
- Microboxer **32**
- Boxer 50 / Miniboxer **34**
- Boxer 81 / Boxer 90 **36**
- Boxer 100 **38**
- Boxer 150 **40**
- Boxer 251 / Boxer 252 **42**
- Boxer 522 / Boxer 502 **44**
- Boxer 503 **46**
- Aluminium cores **48**
- Boxer FPC 100 **52**
- Boxer 35 **53**

RC REMOTE CONTROL

56

- Smidgetbox **57**
- Scubic 15 **58**
- Sboxer 7 **59**
- Sboxer 15 **60**
- Smicroboxer **62**
- Sboxer 50 / Sminiboxer **64**
- Sboxer 81 / Sboxer 90 **66**
- Sboxer 100 **68**

FULLFLOW 502

70

- Chemical compatibility **74**
- Online configurator **75**
- Technical data **76**

EQUAFLUX

78

- Equaflux 51 **79**
- Equaflux 100 **80**
- Equaflux 200 **81**
- Equaflux 302 **82**
- Equaflux 303 **83**

DM - KM

86

- DM 06 **88**
- DM 10 **89**
- DM 15 **90**
- DM 30 **91**
- KM 70 **92**

MB

94

- MB 80 **95**
- MB 100 **96**
- MB 110 **97**
- MB 120 **98**
- MB 130 **99**
- MB 140 **100**
- MB 150 **101**
- MB 155 **102**
- MB 160 **103**
- MB 180 **104**

IM

106

- IM 80 **107**
- IM 90 **108**
- IM 95 **109**
- IM 110 **110**
- IM 120 **111**
- IM 130 **112**
- IM 140 **113**
- IM 150 **114**
- IM 155 **115**
- IM 160 **116**
- IM 180 **117**
- IM 200 **118**

TR

122

- TRP - Polypropylene Casing **123**
- TRF - PVDF casing
- TRA - AISI 316 casing

ACCESSORIES

126

- Pump protection basket strainer **130**
- Mixers: E/EH/F/FR/H/J/RV **131**
- Peristaltic pumps



COMPANY

Who we are

Debem has been active in the liquid transfer sector for over 40 years. A cutting edge company, specialised in pumps for numerous industries and for highly demanding environments.

Our close collaboration with the end user and our customer's feedback have been the key factors of the company's philosophy. We have developed a virtuous system of research and development of the product and service, which has garnered growing appreciation from leading companies in different sectors. Debem's growth figures are important: from a small artisan business to a modern industrial reality, a forty-year

step, always projected towards evolution. Debem offers its customers new and effective services, providing them with technical and commercial information to make it easier to choose the most suitable product and meet every operating requirement. Our customers can count on a call centre able to resolve questions tied to product selection and the most suitable chemical compatibility for their requirements.

Moreover we also provide a technical support service that can respond to any queries of a technical nature, about the installation, pump optimisation, system or about the fluid pumping process.

Debem: tradition and innovation

The history of Debem srl began in 1975 when its founder, Mr. Marco De Bernardi, thanks to theoretical and practical experience gained in the field, decided to embark on his first independent project: an industrial pump; specifically a 1.5 HP plastic centrifugal pump.

The prototype was an immediate success, so much so that Mr. De Bernardi decided to go it alone and create his own line of industrial pumps. The main sectors focused on were the chemical industry, in all its variants, and the textile industry. At the time the latter was particularly successful in Italy, especially in the province of Varese. As the demand for pumps continued growing, Debem increased its product range, always striving to be ahead and looking for new solutions to overcome the difficulties of the production process.

Continuous technical study and industrial innovation thus led to the first patent (dated 1987) in which the engineering study of the pneumatic operation system of the "distributor" was filed. The pneumatic distributor, still in use today in Debem's AODD pumps, was a later inspiration for several Italian and international competitors.

The newly developed system, completely unique for its time, was an immediate success, so much so that it opened the door to exponential growth, which over the years has established Debem as one of Italy's excellences, both in the field of pneumatic double-diaphragm pumps and as an industrial pump manufacturer.



Debem, 1980

Debem's technical office, alongside the research and development department, is constantly developing new projects and innovating current products. Our primary objective of customer satisfaction has led to the development of a modular design of the pumps, which allows for tailor-made and custom assemblies with components and materials that are ideally suited for their use.

One of the strengths is the ever-growing research and development department within the company. Initially introduced with the aim of improving existing products (with studies on the use of new materials, rationalisation of footprints, optimisation of existing technology). The research project resulted in the development of highly innovative products.

Certifications



ATEX:

All the Boxer air operated pumps are ATEX certified and are explosion proof protected, in compliance with the directive 2014/34/EU and the harmonised European standards EN60079-10 and EN 1127-1.

ISO 9001:2015 certification



IECEX:

The Boxer air operated pumps are IECEX certified and are explosion proof protected, in compliance with the international IECEX standards and the standards IEC 60079-10 and EN 1127-1. The Boxer air operated pumps are produced in compliance with IECEX, with class Ex h IIB T4 Gb and Ex h IIB T135° Db for uses in the presence of flammable gases and dust.



American Bureau of Shipping:

Debem manufactures AODD pumps for marine applications in accordance with A.B.S. - American Bureau of Shipping rules.



Debem has decided to use 100% Zero Impact® certified renewable energy



Pumps for the chemical, textile and leather, galvanic and electronics, graphics, paint, glue, paper and paper mills, automotive, oil and many other industries.



Why choose us

The Debem DNA: Cohesion, quality, innovation, customer focus.

Innovative and technologically advanced pumps built with materials and components resistant to aggressive conditions



History

Over 40 years of innovation, research, quality and excellence.



Patents made in Italy

The products are entirely designed, patented and built in Italy by Debem.



International distribution

Debem's products can count on an extensive global distribution (see network).



Materials and Technologies

Debem's products are constructed with the finest quality, certified Italian materials. We use the latest generation technologies in line with the industry 4.0 standards.



Service and consultancy

A call centre able to resolve questions tied to product selection and the most suitable chemical compatibility for their requirements. Support service that responds to technical, installation and pump optimisation queries.



Customised solutions

Debem's air-operated double diaphragm pumps can be customised based on the customer's requirements and application needs.



Research & Development – Innovation

Debem's technical office, alongside the research and development department, is constantly developing new projects and innovating current products.



Ability to handle emergencies


Extremely quick deliveries of finished products and of spare parts for every pump model in the catalogue.



Quality

All the products that leave the company are stamped with a code that includes the production data entered into a database, to ensure utmost quality through every stage of the production process.

The structure

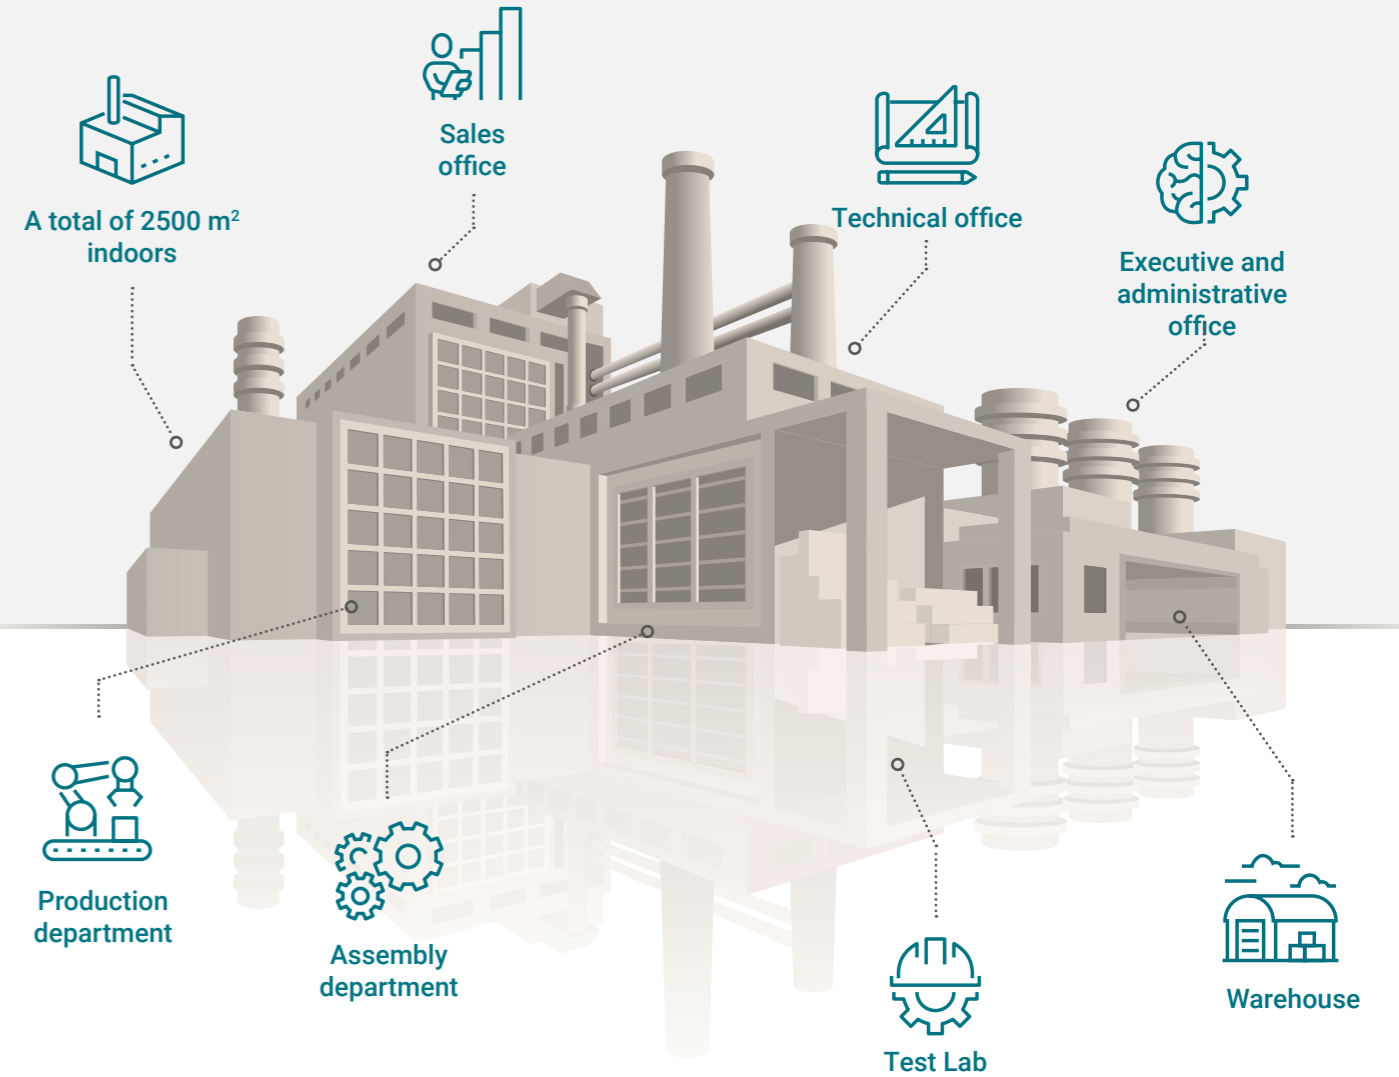

Test Lab

We are very happy to present the new Debem TEST-LAB, an internal analysis and product refinement laboratory. Open to the public for technical courses and certified tests for customers, it is Italy's first IECEx certified laboratory for air-operated pumps.

Consisting of a 4000-litre polypropylene anti-cavitation tank with a compartmentalised structure, the TEST-LAB features two air lines to supply the pumps up to 6000 NL/min and three fluid lines to provide up to 3000 L/min.

The technical equipment includes digital instruments certified to analyse air consumption, flow rates and hydraulic head, for centralised data collection and graphics and for issuing test certificates.




Global network



Our products

Air-operated double diaphragm pumps

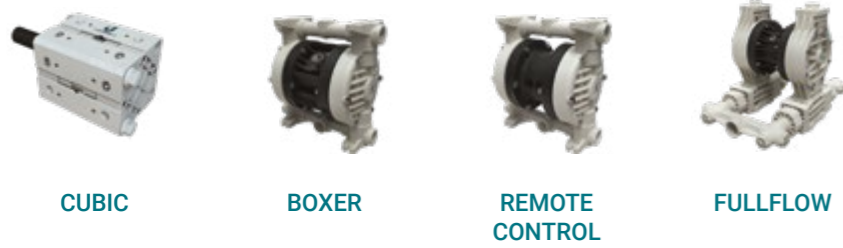

Our air-operated diaphragm pumps are sturdy and powerful, self-priming (dry negative vacuum), also in demanding conditions. They can transfer liquids with high viscosity and/or with suspended solids.

Pulsation dampers



EQUAFLUX


Automatic diaphragm pulsation dampers. Compressed air-driven devices that are installed on the delivery side of air-operated pumps. They minimise the pulsations of the fluid and the consequent vibrations, or water hammer, to protect the process equipment.

Electric centrifugal pumps



Resin centrifugal pumps with horizontal axis mechanical seal, with magnetic drive and vertical axis centrifugal pumps.

Drum transfer pumps

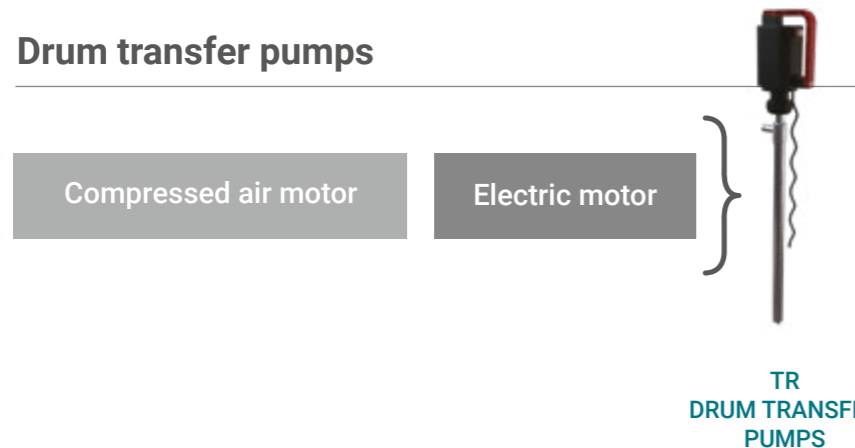

Compressed air or electrical motor driven drum transfer pumps, with the motor installed in direct drive or with a drive coupling. Their portable design renders them ideally suited to quickly transfer clean corrosive liquids from drums.

Main application sectors

<p>AUTOMOTIVE</p>	<p>CERAMIC, STONE, MARBLE, GLASS AND MINING INDUSTRY</p>	<p>GALVANIC AND ELECTRONIC INDUSTRY</p>
<p>GRAPHIC INDUSTRY</p>	<p>TEXTILE AND LEATHER INDUSTRY</p>	<p>PRODUCTION AND STORAGE OF BIODIESEL</p>
<p>CHEMICAL INDUSTRY</p>	<p>PACKING, GLUE, PAPER AND PAPER MILLS</p>	<p>MECHANICAL AND METALLURGIC INDUSTRY</p>
<p>WATER AND SLUDGE TREATMENT</p>	<p>PAINT INDUSTRY</p>	<p>OIL & GAS</p>
<p>GOLD PROCESSING INDUSTRY</p>		




ATEX compliance



All Boxer Air Pumps comply with the Community Directives for the free circulation of goods applicable to them (see Declaration of Conformity).

They are manufactured in STANDARD version in ATEX II 3G Ex h IIB T4 Gc and II 3D Ex h IIB T135°C DcX execution for use in "Zone 2-Zone 22" (in the presence of flammable gas and powders) and in ATEX I M2 Ex h I Mb X execution for use in mines in areas with low impact risk "Zone M2" (in the presence of potentially explosive atmosphere consisting of fireside and coal dust).

Upon specific Order request, pumps can be supplied in CONDUCT version in ATEX II 2G Ex h IIB T4 Gb and II 2D Ex h IIB T135°C DbX execution for use in "Zone 1 - Zone 21".

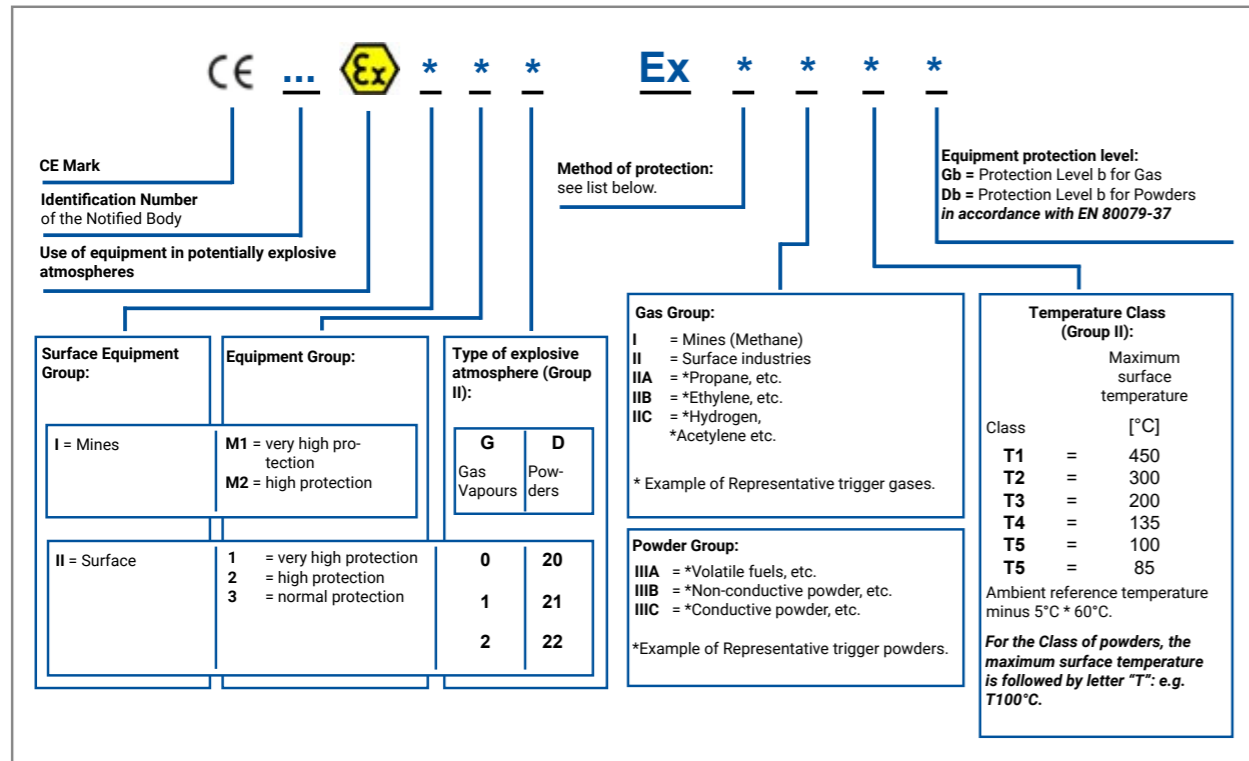

ATTENTION: The Identification Plate of the pump shows the ATEX marking and the category of the equipment. **Check compliance with the classification of the installation "Zone" before carrying out the installation. The equipment user is responsible for classifying their installation zone.** Below is the definition of the ATEX marking for each execution.

- : safety symbol in accordance with DIN 40012 attachment A.
- II 3 G/ II 3 D** : surface equipment for use in areas where the presence of gases, vapours or mists in addition to clouds of combustible powder in the air is unlikely during normal operation, both in external and internal areas and, if it does occur, it will only persist for a short period (Zone 2 - Zone 22).
- II 2 G/ II 2 D** : surface equipment for use in areas with the presence of gases, vapours or mists in addition to clouds of combustible dust in the air that occur occasionally during normal operation, both in external and internal areas (Zone 1 - Zone 21).
- I M2** : M2 category equipment that can be installed in mines in "hazardous condition 2", i.e. in a potentially explosive atmosphere consisting of firedamp and coal dust.
- Ex h** : Protection equipment «c», or «b», or «k», in accordance with EN 80079-37.
- IIB** : excluding the following gases: hydrogen, acetylene, carbon disulphide.
- IIIB** : excluding the following powders: conductive powder.
- I** : product suitable for installation in mines (in a low impact risk area).
- MB** : EPL Mb protection level in accordance with EN 80079-36:16.
- X** : The internal area of the pump is not ATEX, that is, it cannot process powders.
- T4/T135°C** : temperature class permitted. The processed fluid temperature value must fall within such class range and the user must comply with the instructions contained in the manual and with the current laws. Furthermore, the user must take into account the ignition points of the gases, vapours and mists in addition to clouds of combustible powder in the air existing in the area of use.


The Technical File is deposited with TÜV NORD CERT of Hannover.

IECEx compliance



All Boxer Air Pumps comply with the Community Directives for the free circulation of goods applicable to them (see Declaration of Conformity).

BOXER Air pumps are manufactured in CONDUCT version in IECEx execution with class Ex h IIB T4 Gb and Ex h IIIB T135°C Db.

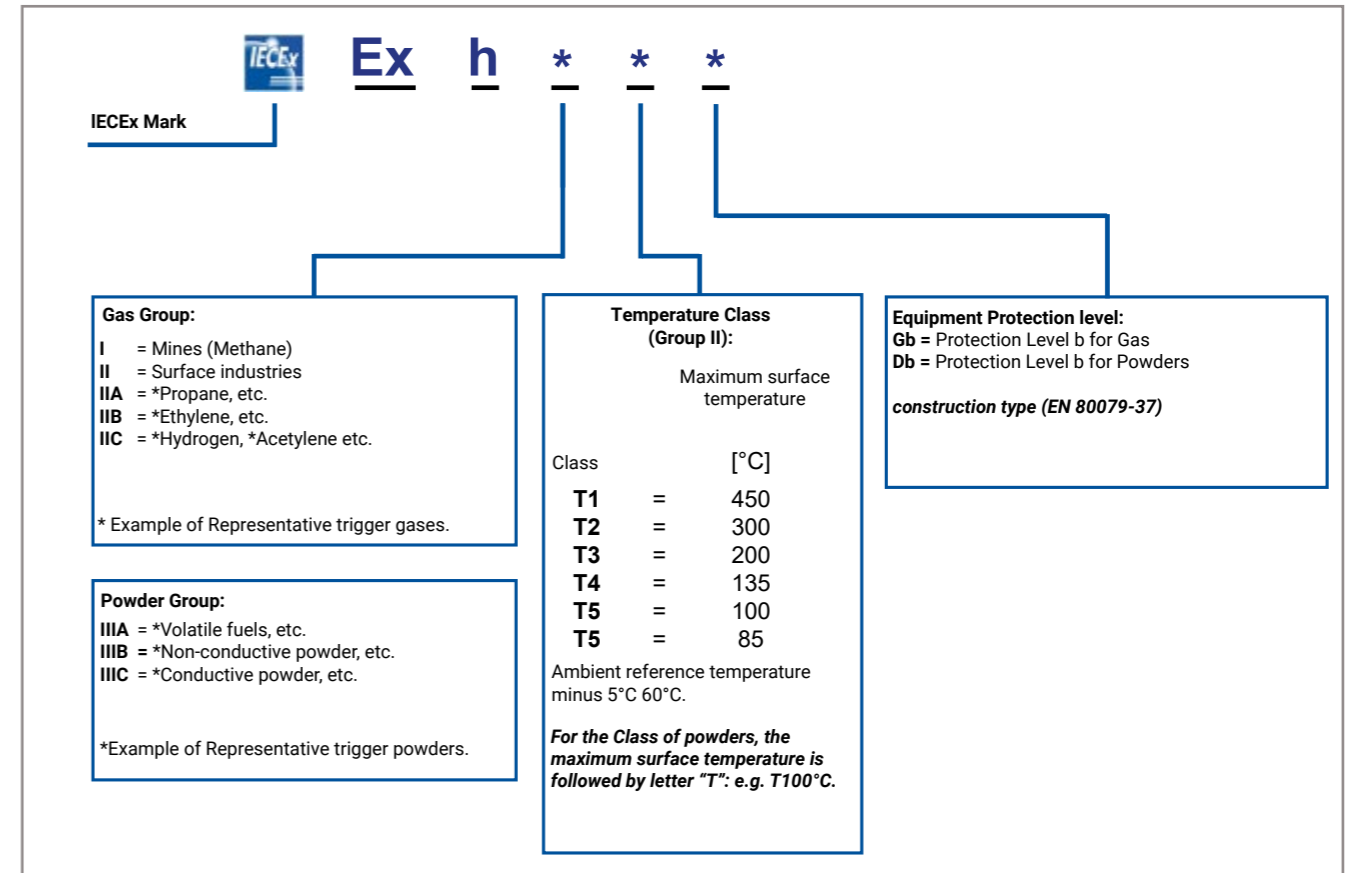

CAUTION: The Identification Plate of the pump shows the IECEx marking and the category of the equipment. **Check compliance with the classification of the installation "Zone" before carrying out the installation. The equipment user is responsible for classifying their installation zone. The pumps in IECEx execution are not available with Hytrel® components and do not have a different use relating to the Ambient Temperature shown on the plate.**

Below is the definition of the IECEx marking of each execution.

- Ex h** : Protection equipment «c», «b», or «k», in accordance with EN 80079-37.
- IIB** : excluding the following gases: hydrogen, acetylene, carbon disulphide.
- IIIB** : excluding the following powders: conductive powder.
- T4/T135°C** : temperature class permitted. The processed fluid temperature value must fall within such class range and the user must comply with the instructions contained in the manual and with the current laws. Furthermore, the user must take into account the ignition points of the gases, vapours and mists in addition to clouds of combustible powder in the air existing in the area of use.

The Technical File is deposited with IEC EUROFINS (EX-3935 Certificate).

Main advantages

The Cubic diaphragm mini pumps and the Boxer diaphragm pumps feature high levels of performance. High power and their sturdiness make them ideal for pumping liquids with high viscosity, even if containing suspended solids. The pneumatic anti-stall circuit ensures safe operation and does not require lubricated air.

These pumps have achieved unprecedented levels of versatility due to their dry self-priming capacity with a considerable suction head, the ability to fine-tune the

speed without losses of pressure as well as the possibility of empty-running without suffering damage. The vast range of construction materials allows us to select the best chemical compatibility with the fluid and/or the environment, without neglecting the operating temperature range.

Their construction principle makes them ideally suited for demanding applications with high levels of humidity or in potentially explosive atmospheres (ATEX and IECEx certification).

■ PP+GF, PP+CF, PVDF, ECTFE, PTFE, Aluminium, Stainless Steel AISI 316, Stainless Steel AISI 316 L, Stainless Steel AISI 316 Electropolished, Stainless Steel AISI 316 L Electropolished

■ Use in explosive atmospheres (ATEX certification zone 1 – 2, IECEx certification)

■ Suitable for demanding applications and in atmospheres with high levels of humidity

■ Dry-running

■ Dry self-priming

■ Supply with non-lubricated air

■ Patented stall protection pneumatic circuit

■ Adjustable flow rate and head

■ Fine adjustment of the speed at constant pressure

■ Possibility of split manifolds (two suctions and two deliveries)

■ Bench or ceiling installation

■ Customisable positions

■ Easy maintenance and parts replacement


■ Excellent ratio between performance and costs

■ Operating temperatures:

- PP / PP+CF from +3°C to +65°C

- PVDF / ECTFE from +3°C to +95°C

- AISI 316 / AISI 316 L / Aluminium from +3°C to 95°C

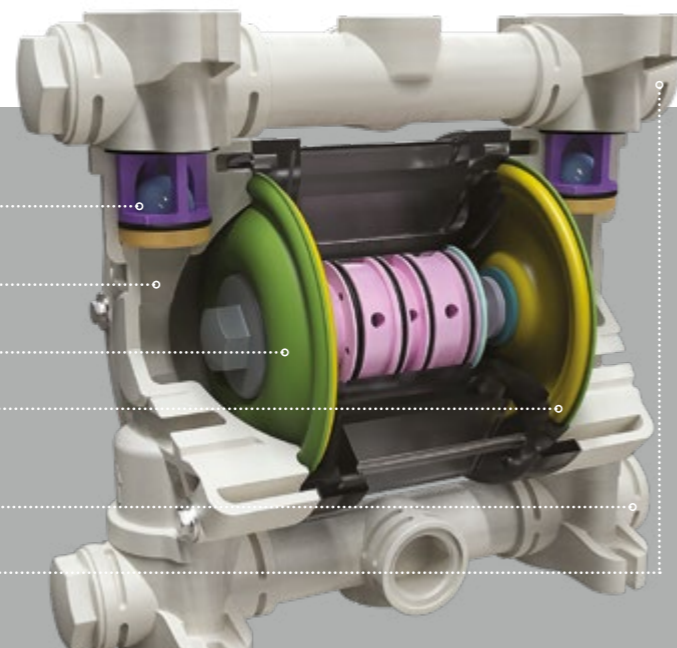

A

B

C1

C2

D

E



A = ball valves
B = pumping chamber
C1 = product-side diaphragm
C2 = air-side diaphragm
D = suction manifold
E = delivery manifold
F = pneumatic exchanger

Cubic mini diaphragm pumps and Boxer diaphragm pumps

CUBIC

ATEX ZONE 1
ON REQUEST

II 2G Ex h IIB T4 Gb
II 2D Ex h IIIB T135°C Db X

ATEX ZONE 2
STANDARD ON ALL MODELS

II 3G Ex h IIB T4 Gc
II 3D Ex h IIIB T135°C Dc X



This range of pumps, with their unique design and compact dimensions, can be used in series in small spaces.

MATERIALS: PP, PP+CF, ECTFE
Dry suction max. 3m



PLASTIC BOXER

ATEX ZONE 1
ON REQUEST

II 2G Ex h IIB T4 Gb
II 2D Ex h IIIB T135°C Db X
Ex h IIB T4 Gb
Ex h IIIB T135°C Db

ATEX ZONE 2
STANDARD ON ALL MODELS

II 3G Ex h IIB T4 Gc
II 3D Ex h IIIB T135°C Dc X
I M2 Ex h I Mb X



IECEx

The plastic Boxer range is designed for demanding uses, for very aggressive and acid liquids, in the numerous applications of the chemical industry.

MATERIALS: PP, PP+CF, PVDF, ECTFE, PTFE
Dry suction max. 5m



METAL BOXER

ATEX ZONE 1
ON REQUEST

II 2G Ex h IIB T4 Gb
II 2D Ex h IIIB T135°C Db X
Ex h IIB T4 Gb
Ex h IIIB T135°C Db

ATEX ZONE 2
STANDARD ON ALL MODELS

II 3G Ex h IIB T4 Gc
II 3D Ex h IIIB T135°C Dc X
I M2 Ex h I Mb X



IECEx

The metal Boxer range is designed for demanding uses, for solvent-based liquids and for numerous uses in the paint industry.

MATERIALS: Aluminium, Stainless Steel AISI 316, Stainless Steel AISI 316 L, Stainless Steel AISI 316 Electropolished, Stainless Steel AISI 316 L Electropolished
Dry suction max. 5m




Patented exchanger

Debem pumps use a patented stall-prevention coaxial pneumatic exchanger. This device introduces compressed air to change the equilibrium of the pressure of the diaphragms, assisted by a stall-prevention circuit, that guarantees optimal performance, even in the most critical conditions. The control part (spool) and the power part (exchanger) are both housed inside the pump in a single block, which limits further losses of load when compressed air flows in the pump. The Debem pneumatic exchanger is easy to repair and/or replace. The internal exchanger is built entirely with

plastic parts (except for the shaft connecting the two diaphragms), rendering it resistant to corrosive fluids and fumes.

The Debem exchanger is pre-lubricated, therefore the supply air for the pump does not require lubrication, quite the opposite, it must be dried and free of impurities, such as oil, dust or condensation. Debem's pneumatic exchanger (unique in its kind) is built with an extremely low number of parts, making parts replacement and maintenance extremely easy.

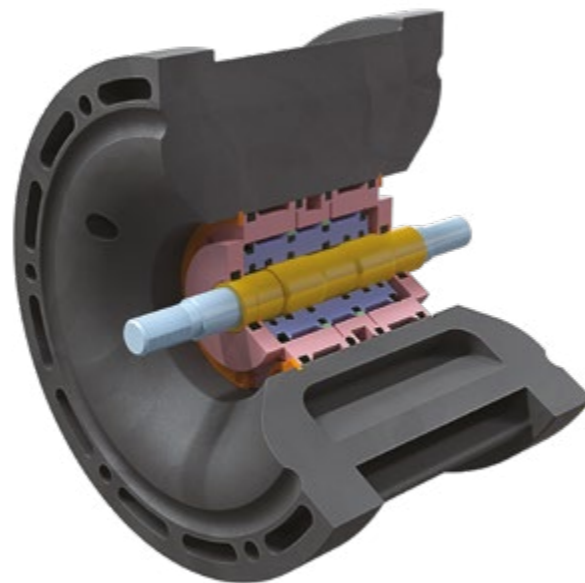

- Low cost of spare parts (single or kit)
- Easy installation
- Self-lubricated system
- No metal parts (only the shaft)
- Stall-prevention system
- Long-life device: more than 50.000.000 cycles

Amongst the lowest air consumptions on the market

The air consumption data (expressed in NI/minute) of Debem pumps are real and verified through certified state-of-the-art instrumentation. The figures are among the lowest on the market to date. Debem pumps are specifically designed to optimise the space at the back of the diaphragms. The volumetric space profiles are specially developed to ensure total expansion of the membranes with very low air volumes. Debem pumps are designed to optimise air consumption regardless of the use of electronic control systems, which the competition sells as an accessory, but which from certain misleading advertisements

seem to be a production standard instead. Be suspicious of all companies that claim technical data without having the instruments necessary to determine their veracity.

Debem is equipped in-house with a newly developed test bench with state-of-the-art certified instrumentation. The test bench is used to test and certify the parameters of its products and the efficiency of pumps in compliance with the latest regulations and in accordance with the new European project for INDUSTRY 4.0.



Membrane Long Life

The diaphragms are the parts subjected to the greatest stresses during suction and pumping, whilst also having to resist the chemical attack and temperature of the liquid and the mechanical fatigue. Their correct assessment and selection is therefore of fundamental importance for the life of the diaphragm, as well as for the investment decisions and maintenance costs.

A modern design process, destructuring testing, as well as an in-depth analysis of the results have allowed Debem to develop the new generation LONG LIFE diaphragms. Thanks to their profile and construction shape, these products offer a larger working surface and improved redistribution of the load, reducing the stress and yield of the material to a minimum.

BOXER / CUBIC FAMILY

RUBBER DIAPHRAGMS

They are produced with rubber mixtures and special additives that improve their chemical characteristics as well as their mechanical flexural and resistance characteristics. These diaphragms have a nylon cloth reinforcement that improves stress distribution.

NBR

Inexpensive and particularly suited for petroleum-based liquids, oil and abrasive fluids.

EPDM

Good resistance to acids, alkaline and abrasion as well as a good flexibility also at low temperatures.



BOXER FAMILY

THERMOPLASTIC DIAPHRAGMS

Made with thermoplastic polymers, these diaphragms provide a high level of mechanical resistance and stress distribution.

HYTREL®

Exceptional toughness and springback: high resistance to creep, impact and fatigue under bending: excellent flexibility at low temperatures, also retaining its properties to a good extent at high temperatures. It is also resistant to the attack of many industrial chemicals, oils and solvents.

SANTOPRENE®

Excellent resistance to acid and alkaline fluids, high flexural resistance and good abrasion resistance.



BOXER / CUBIC FAMILY

PTFE DIAPHRAGMS


This material is known for its considerable resistance to temperature and chemical and corrosive agents. Diaphragms in Debem PTFE undergo a double heat treatment to increase their elasticity and service life. A sample of each batch is subject to destructive tests to check their compliance with the technical requirements. This diaphragm can be installed combined with one of the ones examined earlier, in order to increase the resistance to the corrosive chemical agents and temperature of the fluid.



How does it work?


The compressed air introduced by the pneumatic exchanger (A) behind one of the two diaphragms generates the compression and pushes the product in the delivery duct (B) at the same time, the opposing diaphragms that is integral with the exchanger shaft

creates a vacuum and intakes the liquid (C). Once the stroke has been completed, the pneumatic exchanger diverts the compressed air behind the opposing diaphragm and the cycle is reversed.

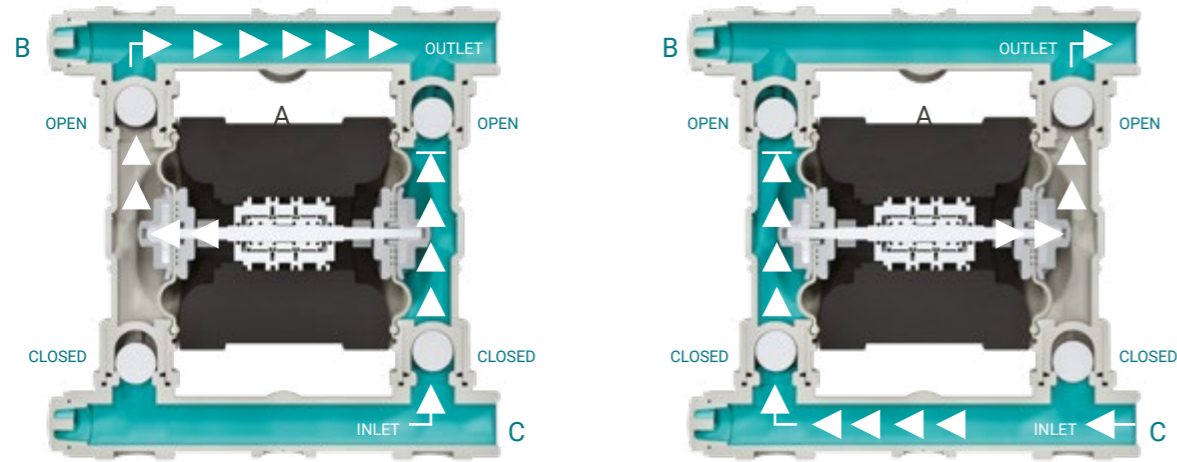

- 1. O-ring
- 2. Cage
- 3. Ball
- 4. Ball seat
- 5. Cap
- 6. Fluid-side diaphragm
- 7. Air side diaphragm
- 8. Central

- 9. Filter silencer
- 10. Plug
- 11. Suction manifold
- 12. Pump body
- 13. Spacer
- 14. Spring cup
- 15. Plate
- 16. Delivery manifold

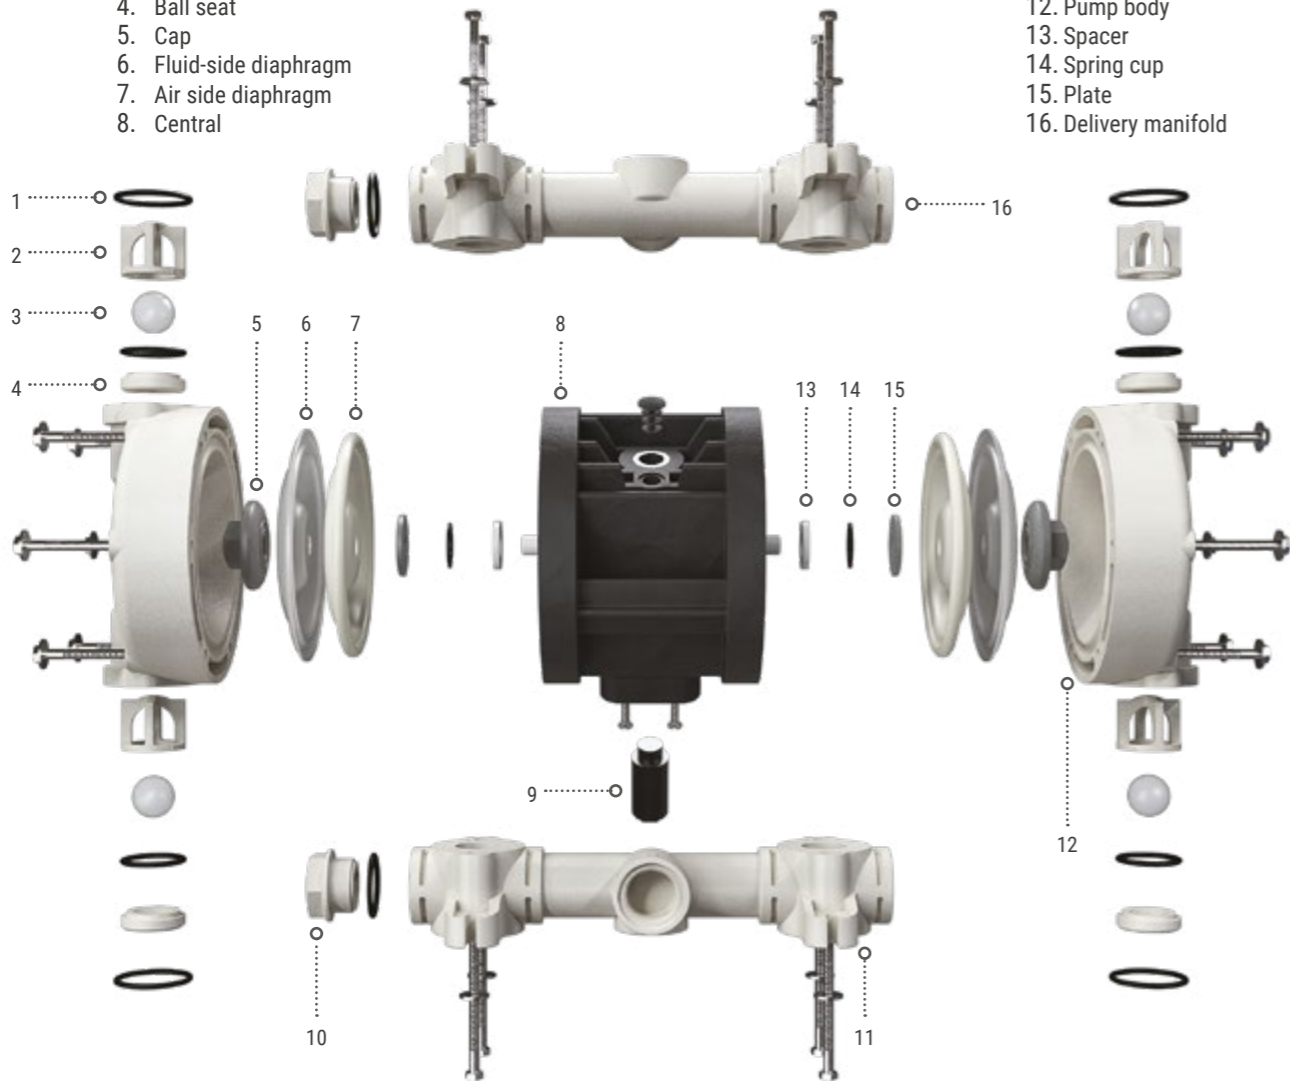

Installations


BOXER / CUBIC FAMILY

Self priming



BOXER FAMILY

Split Suction and Delivery

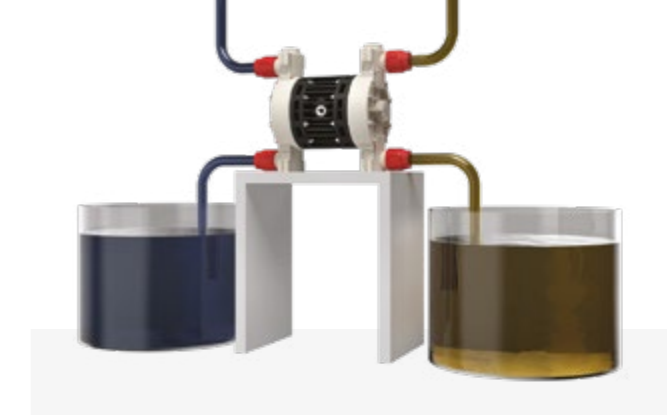

BOXER / CUBIC FAMILY

Under head



BOXER FAMILY

Split Suction



BOXER / CUBIC FAMILY

Immersed



BOXER / CUBIC FAMILY

Drum Transfer



Cubic

Air-operated double diaphragm pumps with a unique design and ATEX certification. They have been designed to have small dimensions that make them particularly suitable for installation directly on industrial equipment for the chemical industry, ink and paint handling, printing machines, oil circulation, and all applica-

tions that need to move discrete quantities of fluid in small spaces. The Cubic range includes the Midgetbox pump which is currently the smallest and highest performing pump on the market for the chemical sector.



Debem's Cubic diaphragm pumps are fitted with a centrally positioned coaxial pneumatic motor.

- Product designed and constructed in Italy
- Patented stall protection pneumatic circuit
- Works with non-lubricated air
- Self priming
- Supports dry running
- ATEX certification for ZONE 1 - ZONE 2
- Adjustable operating speed
- Versatility of use
- Suitable for pumping fluids in demanding applications
- Possibility of pumping fluids containing suspended solids (Cubic 15)
- Possibility of suspended installation
- Suitable for continuous use

CODING CUBIC FAMILY CODES

Example table, for table with complete codes contact Debem sales department.
ex. ICU15P-NTTPV- Internal distributor, Cubic 15, PP casing, NBR air side diaphragm, PTFE product side diaphragm, PTFE balls, PP ball seats, Viton® o-ring.


I	CU15	P	N	T	T	P	V	-	-
INTERNAL DISTRIBUTOR	PUMP MODEL	PUMP BODY	MEMBRANE AIR SIDE	MEMBRANE FLUID SIDE	BALLS	BALL SEATS	O-RING	MANIFOLD	VERSION
I	MID - Midgetbox CU15 - Cubic 15	P - Polypropylene EC - ECTFE (Halar®) PC - PP+CF	N - NBR	T - PTFE	G - Pyrex® ¹⁾ A - AISI 316 L T - PTFE	R - PPS K - PEEK' P - PP E - ECTFE A - AISI 316 L I - PE-UHMW	D - EPDM V - Viton® N - NBR T - PTFE	X <i>Split manifold</i> Y <i>NPT thread</i>	C*

1) Only for Midgetbox

*C CONDUCT version for ATEX ZONE 1



- A = ball valves
- B = pumping chamber
- C1 = product-side diaphragm
- C2 = air-side diaphragm
- D = pneumatic exchanger

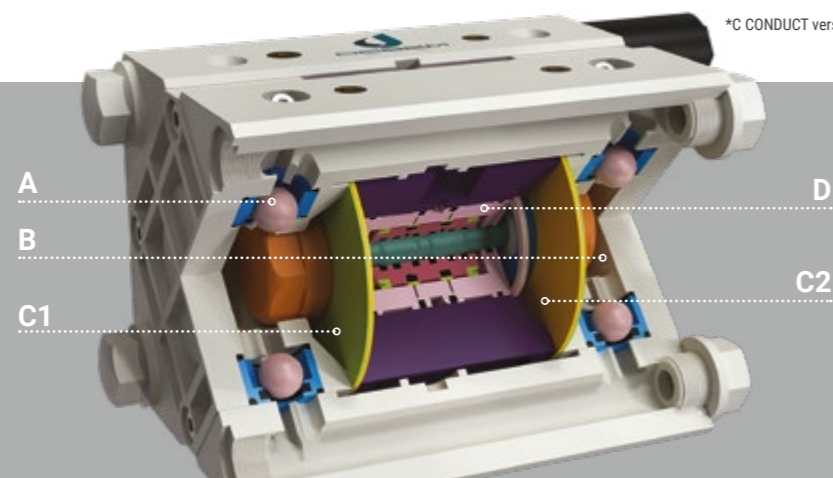

Midgetbox

Specifications and types

Zone 2 - Zone 22
Zone 1 - Zone 21

II 3G Ex h IIB T4 Gc and II 3D Ex h IIIB T135°C Dc X
II 2G Ex h IIB T4 Gb and II 2D Ex h IIIB T135°C Db X

Suction / delivery connections	1/4" f BSPP (*)
Air fitting	1/8" f BSPP
Max. flow rate*	6 l/min
Max. supply air pressure	8 bar
Max. head*	80 m
Max negative suction head - dry-running**	3 m
Max negative suction head - with pump primed	9.5 m
Max. diameter suspended solids	0 mm
Noise	60 dB
Volume per stroke	3.2 cc

(*) NPT fittings on request

* The curves and the performances refer to pumps with immersed suction and open delivery outlet, with water at 20°C and vary depending on material composition.

** The value depends on the pump configuration.




PLASTIC MATERIAL - PP (GF/CF)

Midgetbox



Maximum dimensions

Height	75 mm
Width	122 mm
Depth	60 mm





Construction mat. (casing and manifolds) and net weight

POLYPROPYLENE (with glass additive)	0.52 Kg
Temp.	3°C min. 65°C max


CONDUCTIVE POLYPROPYLENE (with carbon additive)	0.52 Kg
Temp.	3°C min. 65°C max

Any colour variations in our plastic products are due to the special mixtures of the raw materials used. The use of high fillers, glass and long-fibre carbon, provides a distinctive aesthetic that in no way detracts from the quality of the product, but rather emphasises its high technical content, to the benefit of performance.

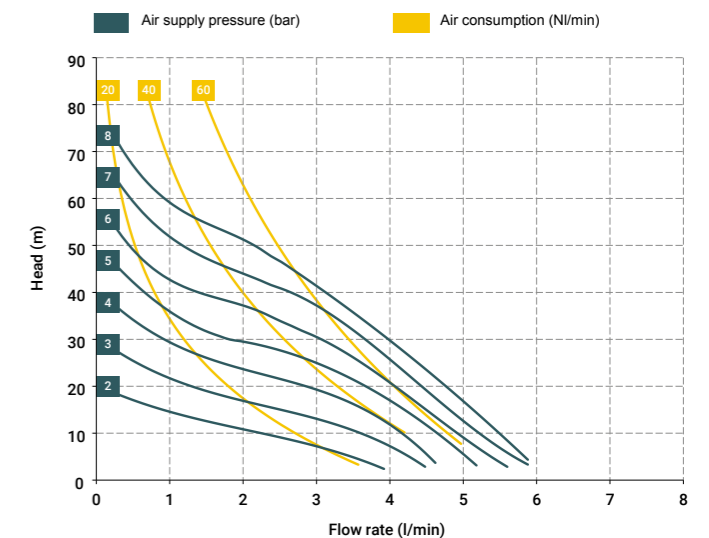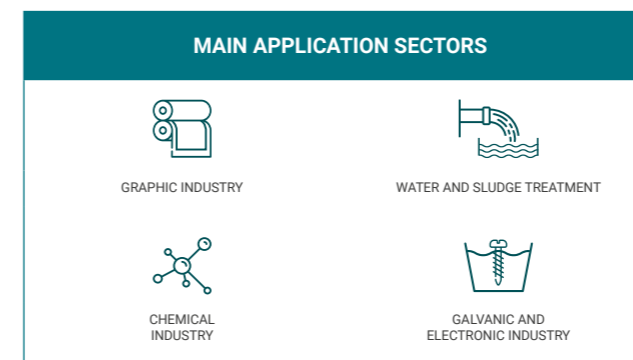

Cubic 15


Specifications and types

 Zone 2 - Zone 22 II 3G Ex h IIB T4 Gc and II 3D Ex h IIIB T135°C Dc X
 Zone 1 - Zone 21 II 2G Ex h IIB T4 Gb and II 2D Ex h IIIB T135°C Db X

Suction / delivery connections	3/8" f BSPP (*)
Air fitting	3/8" f BSPP
Max. flow rate*	17 l/min
Max. supply air pressure	8 bar
Max. head*	80 m
Max negative suction head - dry-running**	3 m
Max negative suction head - with pump primed	9.5 m
Max. diameter suspended solids	0.5 mm
Noise	65 dB
Volume per stroke	10.3 cc



Cubic diaphragm pumps: high performance levels, excellent power and sturdiness, ideal for pumping liquids with high apparent viscosity, even if containing suspended solids. Particularly suited for small spaces.

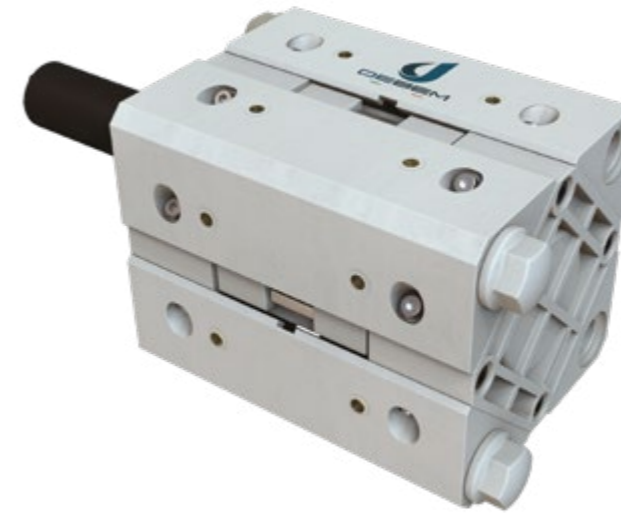

PLASTIC MATERIAL - PP (GF/CF) Cubic 15

Maximum dimensions	
Height	105 mm
Width	201 mm
Depth	105 mm

Construction mat. (casing and manifolds) and net weight	
POLYPROPYLENE (with glass additive)	1.35 Kg
	Temp. 3°C min. 65°C max

CONDUCTIVE POLYPROPYLENE (with carbon additive)	1.35 Kg
	Temp. 3°C min. 65°C max










PLASTIC MATERIAL - ECTFE Cubic 15

Maximum dimensions	
Height	105 mm
Width	201 mm
Depth	105 mm

Construction mat. (casing and manifolds) and net weight	
ECTFE	1.6 Kg
	Temp. 3°C min. 95°C max

MAIN APPLICATION SECTORS

 GRAPHIC INDUSTRY	 WATER AND SLUDGE TREATMENT	 PACKING, GLUE, PAPER AND PAPER MILLS
 CHEMICAL INDUSTRY	 GALVANIC AND ELECTRONIC INDUSTRY	 CERAMIC, STONE, MARBLE, GLASS AND MINING INDUSTRY

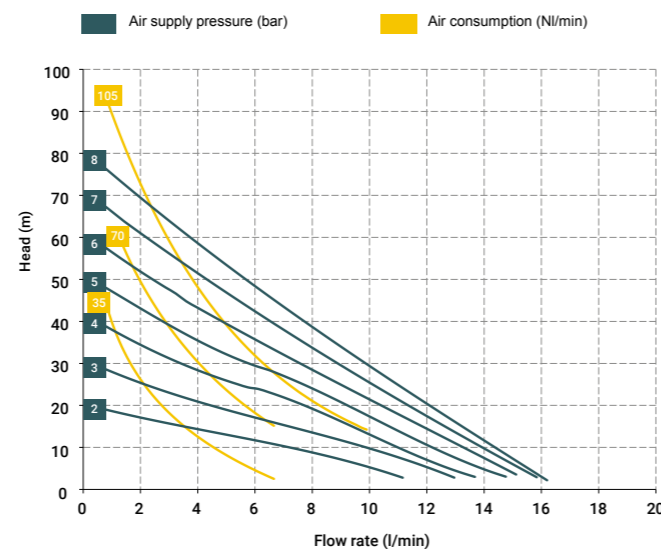

Any colour variations in our plastic products are due to the special mixtures of the raw materials used. The use of high fillers, glass and long-fibre carbon, provides a distinctive aesthetic that in no way detracts from the quality of the product, but rather emphasises its high technical content, to the benefit of performance.

Boxer

Air-operated double diaphragm volumetric pumps, ATEX – IECEx certified, constructed in polypropylene or PVDF in the plastic version or in aluminium or AISI 316L for the metal versions. Boxer pumps are ideal for pumping liquids with high apparent viscosity, even if containing suspended solids. The vast range of materials available for the parts in contact with the flu id,

such as pump casings and manifolds, diaphragms, balls, ball seats and o-rings, makes them compatible with any type of fluid present on the market. They can be used in numerous applications such as the following industries: chemical, graphic, paint, galvanic, ceramic, naval, textile, leather, mechanical, oil and many more.

- Product designed and constructed in Italy
- Patented stall protection pneumatic circuit
- Operation with non-lubricated air
- Self priming
- Supports dry running
- ATEX certification for ZONE 1 - ZONE 2
- IECEx certification
- Possibility of adjusting the operating speed
- Versatility of use
- Suitable for pumping fluids with high viscosity and for demanding applications
- Possibility of pumping fluids containing suspended solids
- Possibility of suspended installation
- Manifolds can be supplied with stainless steel reinforcement rings for pumps in PP – PP+CF – PVDF
- Nozzles available with clamp connections and DIN 11851 (only pumps in AISI 316)
- Long Life profile diaphragms (available in different elastomers) for greater resistance and longer life
- Suitable for continuous use

CODING BOXER FAMILY CODES

ex. IB07-P-HTTPV-
Internal distributor, Boxer 07, PP casing, Hytre[®] air side diaphragm, PTFE product side diaphragm, AISI 316 L balls, PP ball seats, EPDM. O-ring.

IB07-	P	H	T	T	P	V	-	-
PUMP MODEL	PUMP BODY	MEMBRANE AIR SIDE	MEMBRANE FLUID SIDE	BALLS	BALL SEATS	O-RING	MANIFOLD	VERSION
IB07 - Boxer 07	P - PP	N - NBR	T - PTFE	T - PTFE	P - Polypropylene	D - EPDM	X*	C*
IB15 - Boxer 15	PC - PP+CF	D - EPDM		A - AISI 316 L	F - PVDF	V - Viton [®]	3*	Z*
IMICR - Microboxer	FC - PVDF+CF	H - Hytre [®]		D - EPDM	A - AISI 316 L	N - NBR	Y*	
IB35 - Boxer 35	A - AISI 316 (L)	M - Santoprene [®]		N - NBR	I - PE-UHMW	T - PTFE	W*	
IB50 - Boxer 50	AL - ALU				R - PPS		K*	
IMIN - Miniboxer					L - Aluminium			
IB81 - Boxer 81								
IB90 - Boxer 90								
IB100 - Boxer 100								
IB150 - Boxer 150								
IB251 - Boxer 251								
IB252 - Boxer 252								
IB522 - Boxer 522								
IB502 - Boxer 502								
IB503 - Boxer 503								

Example table, for table with complete codes contact Debem sales department.



*X = split manifold
*3 = 3rd hole on manifold
*Y = manifold with NPT connection
*W = clamp manifold
*K = manifold with reinforcement rings (all on request only)
C = CONDUCTIVE version for ATEX ZONE 1
Z = version for IECEx standard

Boxer 7

Specifications and types

Zone 2 - Zone 22 II 3G Ex h IIB T4 Gc and II 3D Ex h IIIB T135°C Dc X
Zone 1 - Zone 21 II 2G Ex h IIB T4 Gb and II 2D Ex h IIIB T135°C Db X
M2 Zone I M2 Ex h I Mb X*
Ex h IIB T4 Gb e Ex h IIIB T135°C Db

*The mining application string does not apply to aluminium pumps in the Boxer range

Suction / delivery connections	1/4" f BSPP(*)
Air fitting	1/8" f BSPP
Max. flow rate*	9 l/min
Max. supply air pressure	8 bar
Max. head*	80 m
Max negative suction head - dry-running**	4 m
Max negative suction head - with pump primed	9.5 m
Max. diameter suspended solids	0.5 mm
Noise	65 dB
Volume per stroke	3.2 cc

(*) NPT fittings only on request
* The curves and the performances refer to pumps with immersed suction and open delivery outlet, with water at 20°C and vary depending on material composition.
** The value depends on the pump configuration.



PLASTIC MATERIAL - PP (GF/CF) Boxer 7

Maximum dimensions	
Height	120 mm
Width	137 mm
Depth	69 mm

Construction mat. (casing and manifolds) and net weight	
POLYPROPYLENE (with glass additive)	0.7 Kg
Temp.	3°C min. 65°C max

CONDUCTIVE POLYPROPYLENE (with carbon additive)	0.7 Kg
Temp.	3°C min. 65°C max

PLASTIC MATERIAL - PVDF Boxer 7

Maximum dimensions	
Height	120 mm
Width	137 mm
Depth	70 mm

Construction mat. (casing and manifolds) and net weight	
PVDF (with carbon additive)	0.7 Kg
Temp.	3°C min. 95°C max

MAIN APPLICATION SECTORS

AUTOMOTIVE

WATER AND SLUDGE TREATMENT

PACKING, GLUE, PAPER AND PAPER MILLS


GRAPHIC INDUSTRY

CHEMICAL INDUSTRY

GALVANIC AND ELECTRONIC INDUSTRY


CERAMIC, STONE, MARBLE, GLASS AND MINING INDUSTRY

PAINT INDUSTRY

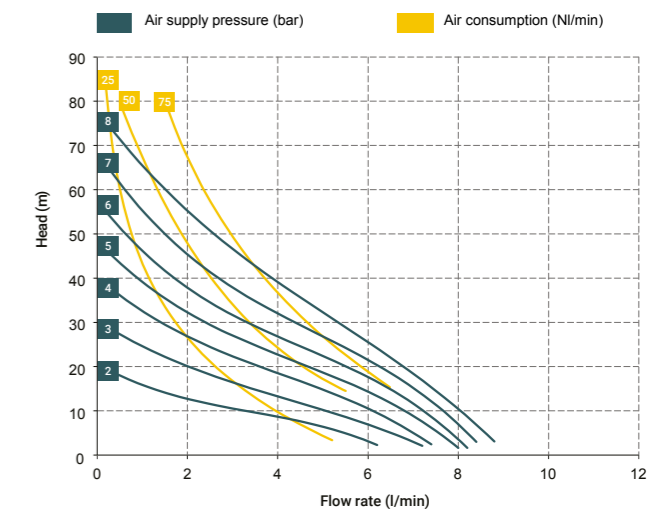

Boxer 15

Specifications and types

 Zone 2 - Zone 22 II 3G Ex h IIB T4 Gc and II 3D Ex h IIIB T135°C Dc X
 Zone 1 - Zone 21 II 2G Ex h IIB T4 Gb and II 2D Ex h IIIB T135°C Db X
 M2 Zone I M2 Ex h I Mb X*
 Ex h IIB T4 Gb e Ex h IIIB T135°C Db

*The mining application string does not apply to aluminium pumps in the Boxer range


Suction / delivery connections Boxer 15	3/8" f BSPP (*)
Suction / delivery connections Foodboxer 15	3/4" Clamp
Air fitting	3/8" f BSPP
Max. flow rate*	17 l/min
Max. supply air pressure	8 bar
Max. head*	80 m
Max negative suction head - dry-running**	3 m
Max negative suction head - with pump primed	9.5 m
Max. diameter suspended solids	0.5 mm
Noise	65 dB
Volume per stroke	10.3 cc

(*) NPT fittings on request

* The curves and the performances refer to pumps with immersed suction and open delivery outlet, with water at 20°C and vary depending on material composition.



** The value depends on the pump configuration.

MAIN APPLICATION SECTORS

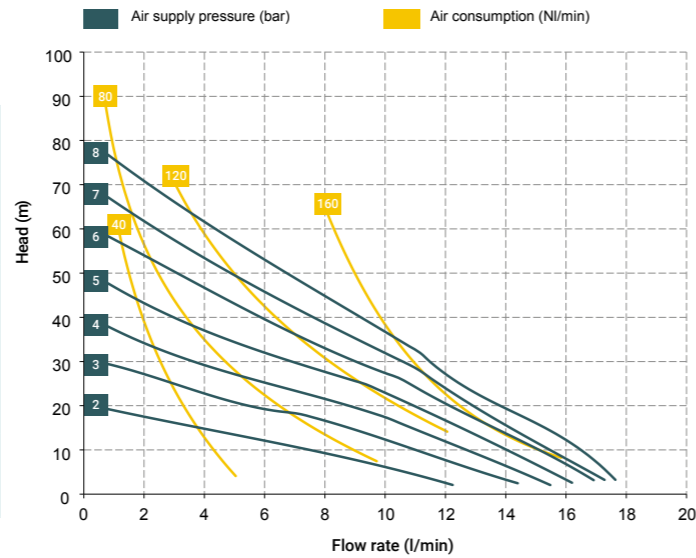

METAL MATERIAL - ALU



Boxer 15

	Maximum dimensions	
	Height	151 mm
	Width	149 mm
	Depth	80 mm
	Construction mat. (casing and manifolds) and net weight	
	ALU	1.9 Kg Temp. 3°C min. 95°C max



METAL MATERIAL - AISI 316 L



Boxer 15

	Maximum dimensions	
	Height	141 mm
	Width	153 mm
	Depth	80 mm
	Construction mat. (casing and manifolds) and net weight	
	AISI 316 L	2.4 Kg Temp. 3°C min. 95°C max



PLASTIC MATERIAL PP (GF/CF) - PVDF

Boxer 15



	Maximum dimensions	
	Height	149 mm
	Width	148 mm
	Depth	80 mm
	Construction mat. (casing and manifolds) and net weight	
	POLYPROPYLENE (with glass additive)	1.1 Kg Temp. 3°C min. 65°C max
	CONDUCTIVE POLYPROPYLENE (with carbon additive)	1.1 Kg Temp. 3°C min. 65°C max
	PVDF (with carbon additive)	1.38 Kg Temp. 3°C min. 95°C max

FOODBOXER 15



METAL MATERIAL - AISI 316 L ELECTROPOLISHED


Foodboxer 15

	Maximum dimensions	
	Height	141 mm
	Width	153 mm
	Depth	80 mm
	Construction mat. (casing and manifolds) and net weight	
	AISI 316 L (electropolished)	2.4 Kg Temp. 3°C min. 95°C max



Microboxer

Specifications and types


 Zone 2 - Zone 22 II 3G Ex h IIB T4 Gc and II 3D Ex h IIIB T135°C Dc X
 Zone 1 - Zone 21 II 2G Ex h IIB T4 Gb and II 2D Ex h IIIB T135°C Db X
 M2 Zone I M2 Ex h I Mb X*
 Ex h IIB T4 Gb e Ex h IIIB T135°C Db

*The mining application string does not apply to aluminium pumps in the Boxer range

Suction / delivery connections Microboxer	1/2" f BSPP(*)
Suction / delivery connections Foodboxer 30	3/4" - 1" Clamp
Air fitting	1/4" f BSPP
Max. flow rate*	35 l/min
Max. supply air pressure	8 bar
Max. head*	80 m
Max negative suction head - dry-running**	4 m
Max negative suction head - with pump primed	9.5 m
Max. diameter suspended solids	2 mm
Noise	65 dB
Volume per stroke	30 cc

(*) NPT fittings on request
 * The curves and the performances refer to pumps with immersed suction and open delivery outlet, with water at 20°C and vary depending on material composition.
 ** The value depends on the pump configuration.

MAIN APPLICATION SECTORS

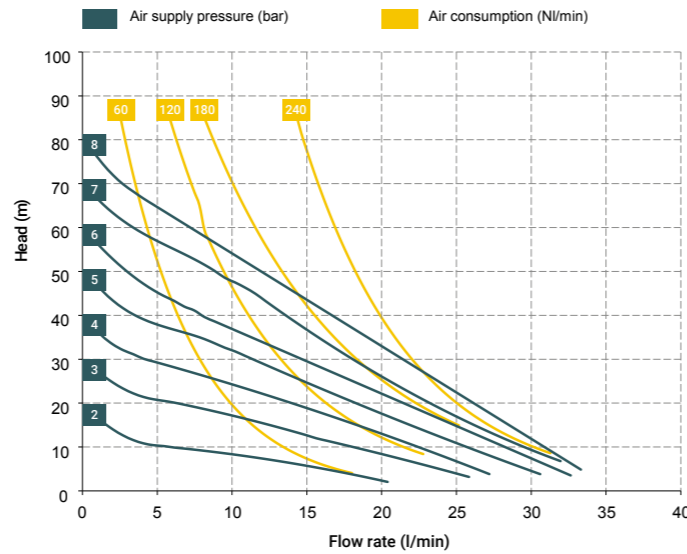

METAL MATERIAL - ALU

Microboxer

	Maximum dimensions	
	Height	172 mm
	Width	164 mm
	Depth	120 mm
	Construction mat. (casing and manifolds) and net weight	
	ALU	2.1 Kg Temp. 3°C min. 95°C max



METAL MATERIAL - AISI 316 L

Microboxer

	Maximum dimensions	
	Height	171 mm
	Width	177 mm
	Depth	120 mm
	Construction mat. (casing and manifolds) and net weight	
	AISI 316 L	3.75 Kg Temp. 3°C min. 95°C max



PLASTIC MATERIAL PP (GF/CF) - PVDF

Microboxer

	Maximum dimensions	
	Height	168 mm
	Width	165 mm
	Depth	120 mm
	Construction mat. (casing and manifolds) and net weight	
	POLYPROPYLENE (with glass additive)	1.6 Kg Temp. 3°C min. 65°C max
	CONDUCTIVE POLYPROPYLENE (with carbon additive)	1.6 Kg Temp. 3°C min. 65°C max
	PVDF (with carbon additive)	1.98 Kg Temp. 3°C min. 95°C max

FOODBOXER 30



METAL MATERIAL - AISI 316 L ELECTROPOLISHED


Foodboxer 30

	Maximum dimensions	
	Height	171 mm
	Width	177 mm
	Depth	120 mm
	Construction mat. (casing and manifolds) and net weight	
	AISI 316 L (electropolished)	3.75 Kg Temp. 3°C min. 95°C max



Boxer 50 / Miniboxer

Specifications and types



 Zone 2 - Zone 22 II 3G Ex h IIB T4 Gc and II 3D Ex h IIIB T135°C Dc X
 Zone 1 - Zone 21 II 2G Ex h IIB T4 Gb and II 2D Ex h IIIB T135°C Db X
 M2 Zone I M2 Ex h I Mb X*
 Ex h IIB T4 Gb e Ex h IIIB T135°C Db





*The mining application string does not apply to aluminium pumps in the Boxer range

Suction / delivery connections Boxer 50 / Miniboxer	1/2" f BSPP (*)
Suction / delivery connections Foodboxer 50	3/4" - 1" Clamp
Air fitting	3/8" f BSPP
Max. flow rate*	60 l/min
Max. supply air pressure	8 bar
Max. head*	80 m
Max negative suction head - dry-running**	4 m
Max negative suction head - with pump primed	9.5 m
Max. diameter suspended solids	4 mm
Noise	70 dB
Volume per stroke	67 cc

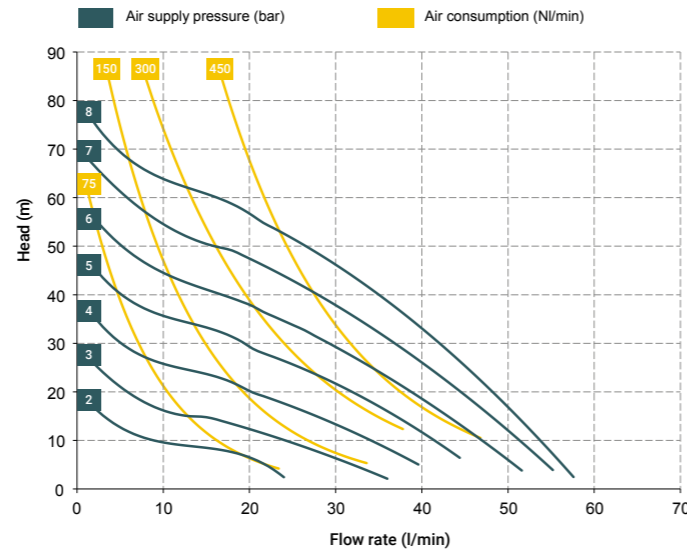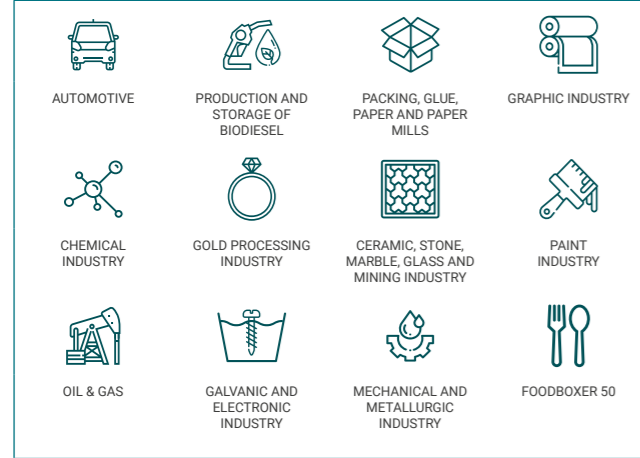


(*) NPT fittings on request
 * The curves and the performances refer to pumps with immersed suction and open delivery outlet, with water at 20°C and vary depending on material composition.
 ** The value depends on the pump configuration.

MAIN APPLICATION SECTORS






PLASTIC MATERIAL PP (GF/CF) - PVDF		Boxer 50
	Maximum dimensions	
	Height	240 mm
	Width	247 mm
	Depth	153 mm
		Construction mat. (casing and manifolds) and net weight
POLYPROPYLENE (with glass additive)		3.75 Kg Temp. 3°C min. 65°C max
	CONDUCTIVE POLYPROPYLENE (with carbon additive)	3.75 Kg Temp. 3°C min. 65°C max
	PVDF (with carbon additive)	4.25 Kg Temp. 3°C min. 95°C max






METAL MATERIAL - ALU		Boxer 50
	Maximum dimensions	
	Height	234 mm
	Width	241 mm
	Depth	153 mm
		Construction mat. (casing and manifolds) and net weight
PVDF (with carbon additive)		4.07 Kg Temp. 3°C min. 95°C max



METAL MATERIAL - AISI 316 L		Miniboxer
	Maximum dimensions	
	Height	232 mm
	Width	232 mm
	Depth	152 mm
		Construction mat. (casing and manifolds) and net weight
AISI 316 L		6.03 Kg Temp. 3°C min. 95°C max




FDA METAL MATERIAL - AISI 316 L ELECTROPOLISHED		Foodboxer 50
	Maximum dimensions	
	Height	232 mm
	Width	232 mm
	Depth	152 mm
		Construction mat. (casing and manifolds) and net weight
AISI 316 L (electropolished)		6.03 Kg Temp. 3°C min. 95°C max

FOODBOXER 50

Boxer 81 / Boxer 90

Specifications and types


 Zone 2 - Zone 22 II 3G Ex h IIB T4 Gc and II 3D Ex h IIIB T135°C Dc X
 Zone 1 - Zone 21 II 2G Ex h IIB T4 Gb and II 2D Ex h IIIB T135°C Db X
 M2 Zone I M2 Ex h I Mb X*
 Ex h IIB T4 Gb e Ex h IIIB T135°C Db



*The mining application string does not apply to aluminium pumps in the Boxer range

Suction / delivery connections Boxer 81 / 90	1" f BSPP (*)
Suction / delivery connections Foodboxer 81	1"1/2 Clamp
Air fitting	3/8" f BSPP
Max. flow rate*	110 l/min
Max. supply air pressure	8 bar
Max. head*	80 m
Max negative suction head - dry-running**	4 m
Max negative suction head - with pump primed	9.5 m
Max. diameter suspended solids	4 mm
Noise	70 dB
Volume per stroke	100 cc



(*) NPT fittings on request
 * The curves and the performances refer to pumps with immersed suction and open delivery outlet, with water at 20°C and vary depending on material composition.
 ** The value depends on the pump configuration.

MAIN APPLICATION SECTORS

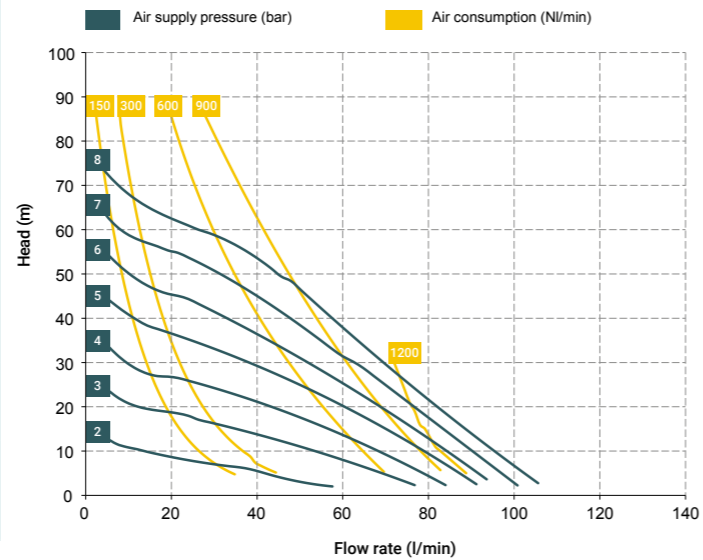



PLASTIC MATERIAL PP (GF/CF) - PVDF		Boxer 81
	Maximum dimensions	
	Height	274 mm
	Width	308 mm
	Construction mat. (casing and manifolds) and net weight	
	POLYPROPYLENE (with glass additive)	5 Kg Temp. 3°C min. 65°C max
	CONDUCTIVE POLYPROPYLENE (with carbon additive)	5 Kg Temp. 3°C min. 65°C max
	PVDF (with carbon additive)	6 Kg Temp. 3°C min. 95°C max



METAL MATERIAL - AISI 316		Boxer 81
	Maximum dimensions	
	Height	275 mm
	Width	305 mm
	Construction mat. (casing and manifolds) and net weight	
	AISI 316	10.6 Kg Temp. 3°C min. 95°C max



FOODBOXER 81



METAL MATERIAL - AISI 316 L ELECTROPOLISHED		Foodboxer 81
	Maximum dimensions	
	Height	275 mm
	Width	305 mm
	Construction mat. (casing and manifolds) and net weight	
	AISI 316 (electropolished)	10.6 Kg Temp. 3°C min. 95°C max

BOXER 90



METAL MATERIAL - ALU		Boxer 90
	Maximum dimensions	
	Height	291 mm
	Width	293 mm
	Construction mat. (casing and manifolds) and net weight	
	ALU	7 Kg Temp. 3°C min. 95°C max

Boxer 100

Specifications and types

Ex	Zone 2 - Zone 22	II 3G Ex h IIB T4 Gc and II 3D Ex h IIIB T135°C Dc X
	Zone 1 - Zone 21	II 2G Ex h IIB T4 Gb and II 2D Ex h IIIB T135°C Db X
	M2 Zone	I M2 Ex h I Mb X*
	Ex h IIB T4 Gb e Ex h IIIB T135°C Db	


*The mining application string does not apply to aluminium pumps in the Boxer range

Suction / delivery connections Boxer 100	1" f BSPP (*)
Suction / delivery connections Foodboxer 100	1 1/2" Clamp
Air fitting	3/8" f BSPP
Max. flow rate*	160 l/min
Max. supply air pressure	8 bar
Max. head*	80 m
Max negative suction head - dry-running**	4 m
Max negative suction head - with pump primed	9.5 m
Max. diameter suspended solids	4 mm
Noise	75 dB
Volume per stroke	222 cc

(*) NPT fittings on request
 * The curves and the performances refer to pumps with immersed suction and open delivery outlet, with water at 20°C and vary depending on material composition.
 ** The value depends on the pump configuration.

MAIN APPLICATION SECTORS

AUTOMOTIVE	TEXTILE AND LEATHER INDUSTRY	PACKING, GLUE, PAPER AND PAPER MILLS	CERAMIC, STONE, MARBLE, GLASS AND MINING INDUSTRY	GRAPHIC INDUSTRY
PAINT INDUSTRY	GOLD PROCESSING INDUSTRY	GALVANIC AND ELECTRONIC INDUSTRY	MECHANICAL AND METALLURGIC INDUSTRY	CHEMICAL INDUSTRY
WATER AND SLUDGE TREATMENT	OIL & GAS	PRODUCTION AND STORAGE OF BIODIESEL	FOODBOXER 100	

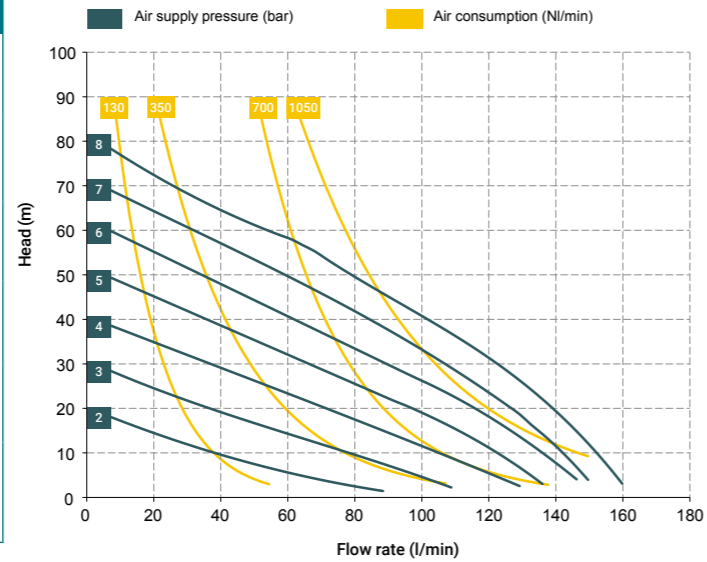

PLASTIC MATERIAL PP (GF/CF) - PVDF		Boxer 100
	Maximum dimensions	
	Height	325 mm
	Width	329 mm
	Construction mat. (casing and manifolds) and net weight	
	POLYPROPYLENE (with glass additive)	7.6 Kg Temp. 3°C min. 65°C max
	CONDUCTIVE POLYPROPYLENE (with carbon additive)	7.6 Kg Temp. 3°C min. 65°C max
	PVDF (with carbon additive)	9.6 Kg Temp. 3°C min. 95°C max



METAL MATERIAL - ALU		Boxer 100
	Maximum dimensions	
	Height	324 mm
	Width	315 mm
	Construction mat. (casing and manifolds) and net weight	
	ALU	8.5 Kg Temp. 3°C min. 95°C max




METAL MATERIAL - AISI 316		Boxer 100
	Maximum dimensions	
	Height	327 mm
	Width	308 mm
	Construction mat. (casing and manifolds) and net weight	
	AISI 316	11.7 Kg Temp. 3°C min. 95°C max



		FOODBOXER 100
METAL MATERIAL - AISI 316 ELECTROPOLISHED		Foodboxer 100
	Maximum dimensions	
	Height	327 mm
	Width	308 mm
	Construction mat. (casing and manifolds) and net weight	
	AISI 316 (electropolished)	11.7 Kg Temp. 3°C min. 95°C max

Boxer 150

Specifications and types



 Zone 2 - Zone 22 II 3G Ex h IIB T4 Gc and II 3D Ex h IIIB T135°C Dc X
 Zone 1 - Zone 21 II 2G Ex h IIB T4 Gb and II 2D Ex h IIIB T135°C Db X
 M2 Zone I M2 Ex h I Mb X*
 Ex h IIB T4 Gb e Ex h IIIB T135°C Db



*The mining application string does not apply to aluminium pumps in the Boxer range

Suction / delivery connections Boxer 150	1"1/4 f BSPP (*)
Suction / delivery connections Foodboxer 150	1"1/4 Clamp (ISO) for manifold size
Air fitting	1/2" f BSPP
Max. flow rate*	220 l/min
Max. supply air pressure	8 bar
Max. head*	80 m
Max negative suction head - dry-running**	4 m
Max negative suction head - with pump primed	9.5 m
Max. diameter suspended solids	5 mm
Noise	75 dB
Volume per stroke	340 cc

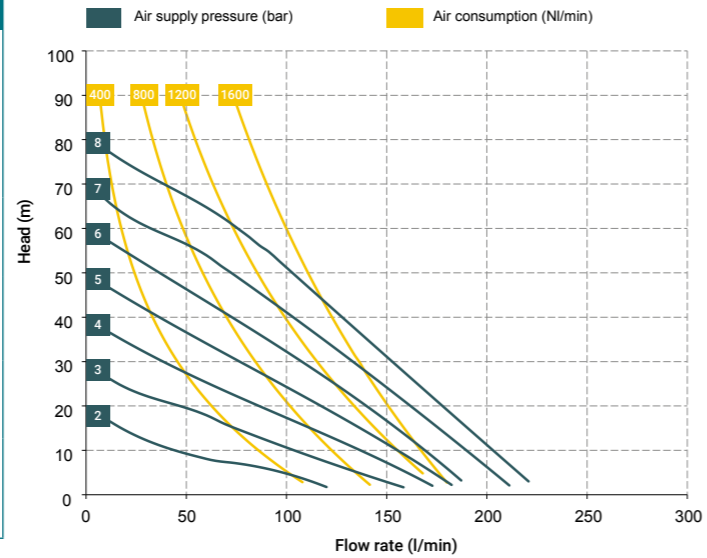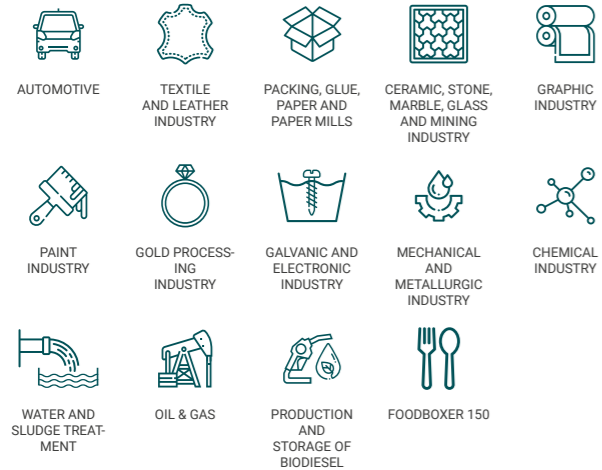

(*) NPT fittings on request
 * The curves and the performances refer to pumps with immersed suction and open delivery outlet, with water at 20°C and vary depending on material composition.
 ** The value depends on the pump configuration.

MAIN APPLICATION SECTORS





PLASTIC MATERIAL PP (GF/CF) - PVDF		Boxer 150
	Maximum dimensions	
	Height	386 mm
	Width	399 mm
	Construction mat. (casing and manifolds) and net weight	
	POLYPROPYLENE (with glass additive)	12 Kg Temp. 3°C min. 65°C max
	CONDUCTIVE POLYPROPYLENE (with carbon additive)	12 Kg Temp. 3°C min. 65°C max
	PVDF (with carbon additive)	14 Kg Temp. 3°C min. 95°C max





METAL MATERIAL - ALU		Boxer 150
	Maximum dimensions	
	Height	385 mm
	Width	394 mm
	Construction mat. (casing and manifolds) and net weight	
	ALU	15 Kg Temp. 3°C min. 95°C max



METAL MATERIAL - AISI 316		Boxer 150
	Maximum dimensions	
	Height	390 mm
	Width	388 mm
	Construction mat. (casing and manifolds) and net weight	
	AISI 316	23 Kg Temp. 3°C min. 95°C max


FOODBOXER 150



FDA METAL MATERIAL - AISI 316 ELECTROPOLISHED		Foodboxer 150
	Maximum dimensions	
	Height	390 mm
	Width	388 mm
	Construction mat. (casing and manifolds) and net weight	
	AISI 316 (electropolished)	23 Kg Temp. 3°C min. 95°C max

Boxer 251 / Boxer 252

Specifications and types



 Zone 2 - Zone 22 II 3G Ex h IIB T4 Gc and II 3D Ex h IIIB T135°C Dc X
 Zone 1 - Zone 21 II 2G Ex h IIB T4 Gb and II 2D Ex h IIIB T135°C Db X
 M2 Zone I M2 Ex h I Mb X*
 Ex h IIB T4 Gb e Ex h IIIB T135°C Db

*The mining application string does not apply to aluminium pumps in the Boxer range

Suction / delivery connections Boxer 251 / Boxer 252	1 1/2" f BSPP (*)
Suction / delivery connections Foodboxer 252	2" Clamp
Air fitting	1/2" f BSPP
Max. flow rate*	340 l/min
Max. supply air pressure	8 bar
Max. head*	80 m
Max negative suction head - dry-running**	4 m
Max negative suction head - with pump primed	9.5 m
Max. diameter suspended solids	6 mm
Noise	80 dB
Volume per stroke	552 cc

(*) NPT fittings on request
 * The curves and the performances refer to pumps with immersed suction and open delivery outlet, with water at 20°C and vary depending on material composition.
 ** The value depends on the pump configuration.

MAIN APPLICATION SECTORS

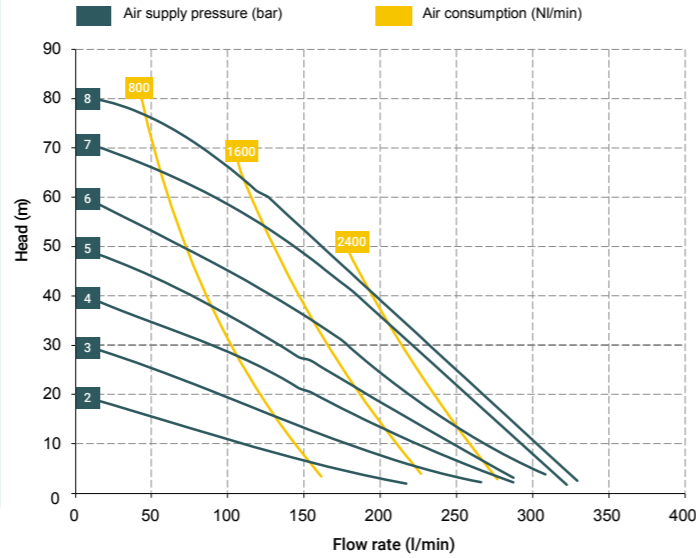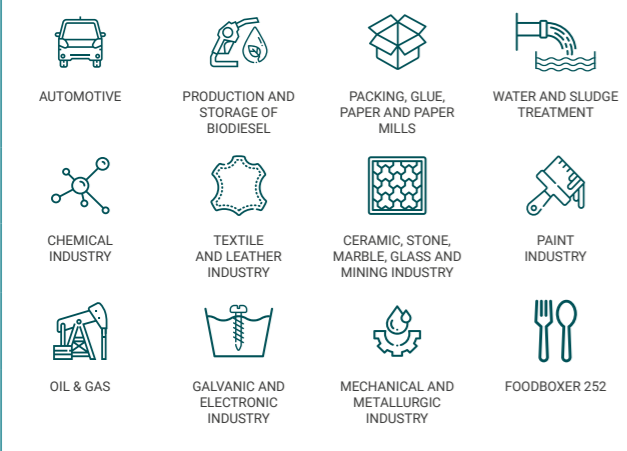

METAL MATERIAL - ALU

Boxer 251

	Maximum dimensions	
	Height	491 mm
	Width	490 mm
	Depth	254 mm
	Construction mat. (casing and manifolds) and net weight	
	ALU	19 Kg
		Temp. 3°C min. 95°C max



BOXER 252

METAL MATERIAL - AISI 316

Boxer 252

	Maximum dimensions	
	Height	537 mm
	Width	417 mm
	Depth	254 mm
	Construction mat. (casing and manifolds) and net weight	
	AISI 316	26.2 Kg
		Temp. 3°C min. 95°C max



PLASTIC MATERIAL PP (GF/CF) - PVDF

Boxer 251

	Maximum dimensions	
	Height	492 mm
	Width	493 mm
	Depth	254 mm
	Construction mat. (casing and manifolds) and net weight	
	POLYPROPYLENE (with glass additive)	17.5 Kg
		Temp. 3°C min. 65°C max
	CONDUCTIVE POLYPROPYLENE (with carbon additive)	20 Kg
		Temp. 3°C min. 65°C max
	PVDF (with carbon additive)	20 Kg
		Temp. 3°C min. 95°C max

FOODBOXER 252

FDA METAL MATERIAL - AISI 316 ELECTROPOLISHED


Foodboxer 252

	Maximum dimensions	
	Height	537 mm
	Width	417 mm
	Depth	254 mm
	Construction mat. (casing and manifolds) and net weight	
	AISI 316 (electropolished)	26.2 Kg
		Temp. 3°C min. 95°C max



Boxer 522 / Boxer 502

Specifications and types



 Zone 2 - Zone 22 II 3G Ex h IIB T4 Gc and II 3D Ex h IIIB T135°C Dc X
 Zone 1 - Zone 21 II 2G Ex h IIB T4 Gb and II 2D Ex h IIIB T135°C Db X
 M2 Zone I M2 Ex h I Mb X*
 Ex h IIB T4 Gb e Ex h IIIB T135°C Db



*The mining application string does not apply to aluminium pumps in the Boxer range

Suction / delivery connections Boxer 522 / Boxer 502	2" f BSPP (*)
Suction / delivery connections Foodboxer 502	2"1/2 Clamp
Air fitting	1/2" f BSPP
Max. flow rate*	600 l/min
Max. supply air pressure	8 bar
Max. head*	80 m
Max negative suction head - dry-running**	5 m
Max negative suction head - with pump primed	9.5 m
Max. diameter suspended solids	8 mm
Noise	80 dB
Volume per stroke	1825 cc



(*) NPT fittings on request
 * The curves and the performances refer to pumps with immersed suction and open delivery outlet, with water at 20°C and vary depending on material composition.
 ** The value depends on the pump configuration.

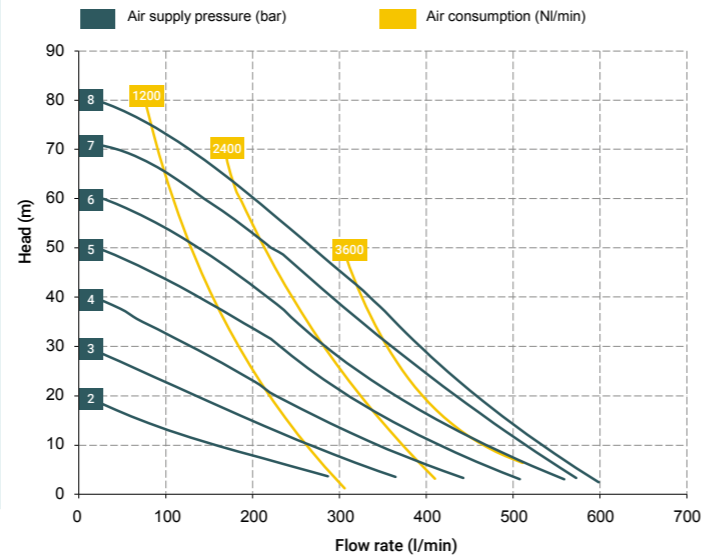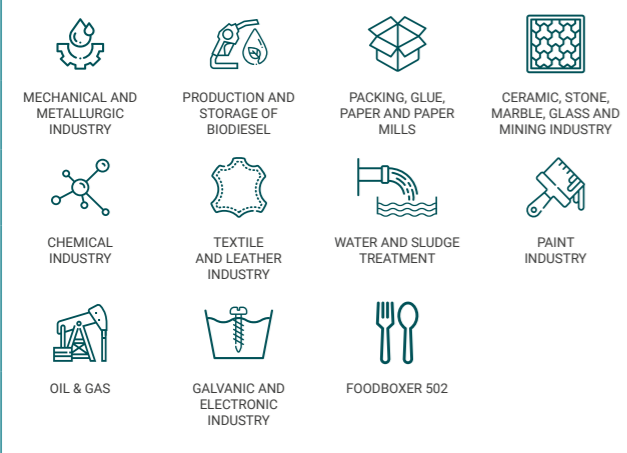MAIN APPLICATION SECTORS





METAL MATERIAL - ALU	Boxer 502
	Maximum dimensions
	Height 621 mm
	Width 566 mm
	Depth 404 mm
	Construction mat. (casing and manifolds) and net weight
	ALU 37 Kg
	Temp. 3°C min. 95°C max





METAL MATERIAL - AISI 316	Boxer 502
	Maximum dimensions
	Height 705 mm
	Width 470 mm
	Depth 404 mm
	Construction mat. (casing and manifolds) and net weight
	AISI 316 54 Kg
	Temp. 3°C min. 95°C max



PLASTIC MATERIAL PP (GF/CF) - PVDF	Boxer 522
	Maximum dimensions
	Height 650 mm
	Width 590 mm
	Depth 404 mm
	Construction mat. (casing and manifolds) and net weight
	POLYPROPYLENE (with glass additive) 38 Kg
	Temp. 3°C min. 65°C max
	CONDUCTIVE POLYPROPYLENE (with carbon additive) 34.5 Kg
	Temp. 3°C min. 65°C max
	PVDF (with carbon additive) 45 Kg
	Temp. 3°C min. 95°C max

FOODBOXER 502



FDA METAL MATERIAL - AISI 316 ELECTROPOLISHED	Foodboxer 502
	Maximum dimensions
	Height 705 mm
	Width 470 mm
	Depth 404 mm
	Construction mat. (casing and manifolds) and net weight
	AISI 316 (electropolished) 54 Kg
	Temp. 3°C min. 95°C max

Boxer 503

Specifications and types

Ex	Zone 2 - Zone 22	II 3G Ex h IIB T4 Gc and II 3D Ex h IIIB T135°C Dc X
	Zone 1 - Zone 21	II 2G Ex h IIB T4 Gb and II 2D Ex h IIIB T135°C Db X
	M2 Zone	I M2 Ex h I Mb X*
	Ex h IIB T4 Gb e Ex h IIIB T135°C Db	


*The mining application string does not apply to aluminium pumps in the Boxer range

Suction / delivery connections Boxer 503	3" f BSPP (*)
Suction / delivery connections Foodboxer 503	4" Clamp
Air fitting	3/4" f BSPP
Max. flow rate*	800 l/min
Max. supply air pressure	8 bar
Max. head*	80 m
Max negative suction head - dry-running**	4 m
Max negative suction head - with pump primed	9.5 m
Max. diameter suspended solids	10 mm
Noise	80 dB
Volume per stroke	1825 cc

(*) NPT fittings on request
 * The curves and the performances refer to pumps with immersed suction and open delivery outlet, with water at 20°C and vary depending on material composition.
 ** The value depends on the pump configuration.

MAIN APPLICATION SECTORS

WATER AND SLUDGE TREATMENT	TEXTILE AND LEATHER INDUSTRY	PACKING, GLUE, PAPER AND PAPER MILLS	CERAMIC, STONE, MARBLE, GLASS AND MINING INDUSTRY	CHEMICAL INDUSTRY
PAINT INDUSTRY	OIL & GAS	PRODUCTION AND STORAGE OF BIODIESEL	MECHANICAL AND METALLURGIC INDUSTRY	FOODBOXER 503

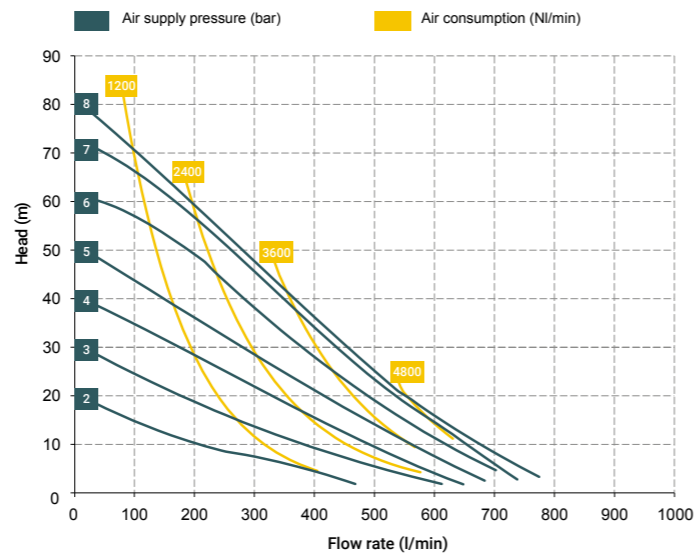

METAL MATERIAL - ALU	Boxer 503
Maximum dimensions	
Height	806 mm
Width	580 mm
Depth	404 mm
Construction mat. (casing and manifolds) and net weight	
ALU	66 Kg Temp. 3°C min. 95°C max



METAL MATERIAL - AISI 316	Boxer 503
Maximum dimensions	
Height	826 mm
Width	546 mm
Depth	404 mm
Construction mat. (casing and manifolds) and net weight	
AISI 316	71 Kg Temp. 3°C min. 95°C max



PLASTIC MATERIAL PP (GF/CF) - PVDF	Boxer 503
Maximum dimensions	
Height	726 mm
Width	585 mm
Depth	404 mm
Construction mat. (casing and manifolds) and net weight	
POLYPROPYLENE (with glass additive)	50 Kg Temp. 3°C min. 65°C max
CONDUCTIVE POLYPROPYLENE (with carbon additive)	50 Kg Temp. 3°C min. 65°C max
PVDF (with carbon additive)	67 Kg Temp. 3°C min. 95°C max



FDA METAL MATERIAL - AISI 316 ELECTROPOLISHED	Foodboxer 503
Maximum dimensions	
Height	826 mm
Width	546 mm
Depth	404 mm
Construction mat. (casing and manifolds) and net weight	
AISI 316 (electropolished)	71 Kg Temp. 3°C min. 95°C max

FOODBOXER 503

Aluminium cores

Boxer series pumps, irrespective of the material of construction of bodies and manifolds, can be supplied with an aluminium control unit. Our aluminium cores are die-cast and manufactured from material of certified Italian origin.

The aluminium core conducts heat and electricity excellently. The high conductivity of aluminium makes it

a good electrical conductor, excellent for installation on conductive pumps for ATEX ZONE 1. The aluminium core gives the metal pumps an 88% recyclability rate.

- Die-cast aluminium cores
- Material of certified Italian origin
- Excellent electrical conductivity for applications in ATEX ZONE 1
- Total recyclability of components



Pumps with aluminium cores for the rubber, plastics, metal, graphic industry, mechanical engineering, metallurgy, glass, furniture and woodworking industries, automotive, ceramics and construction.



Zone 2 - Zone 22 II 3G Ex h IIB T4 Gc and II 3D Ex h IIIB T135°C Dc X
 Zone 1 - Zone 21 II 2G Ex h IIB T4 Gb and II 2D Ex h IIIB T135°C Db X

Models and materials

MICROBOXER PP

MICROBOXER PVDF

MICROBOXER ALU

MICROBOXER STAINLESS STEEL



MICROBOXER

BOXER 50 PP

BOXER 50 PVDF

BOXER 50 ALU

MINIBOXER STAINLESS STEEL



BOXER 50 - MINIBOXER

BOXER 81 PP






BOXER 81 PVDF

BOXER 81 STAINLESS STEEL

BOXER 90 ALU




BOXER 81 - BOXER 90

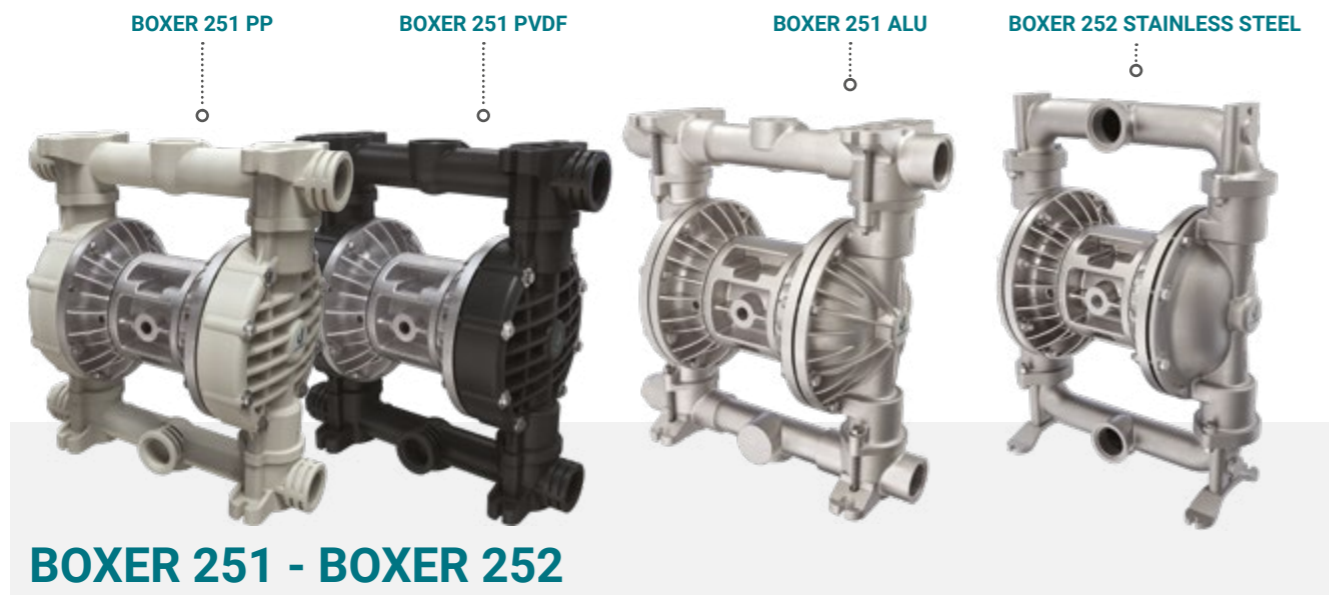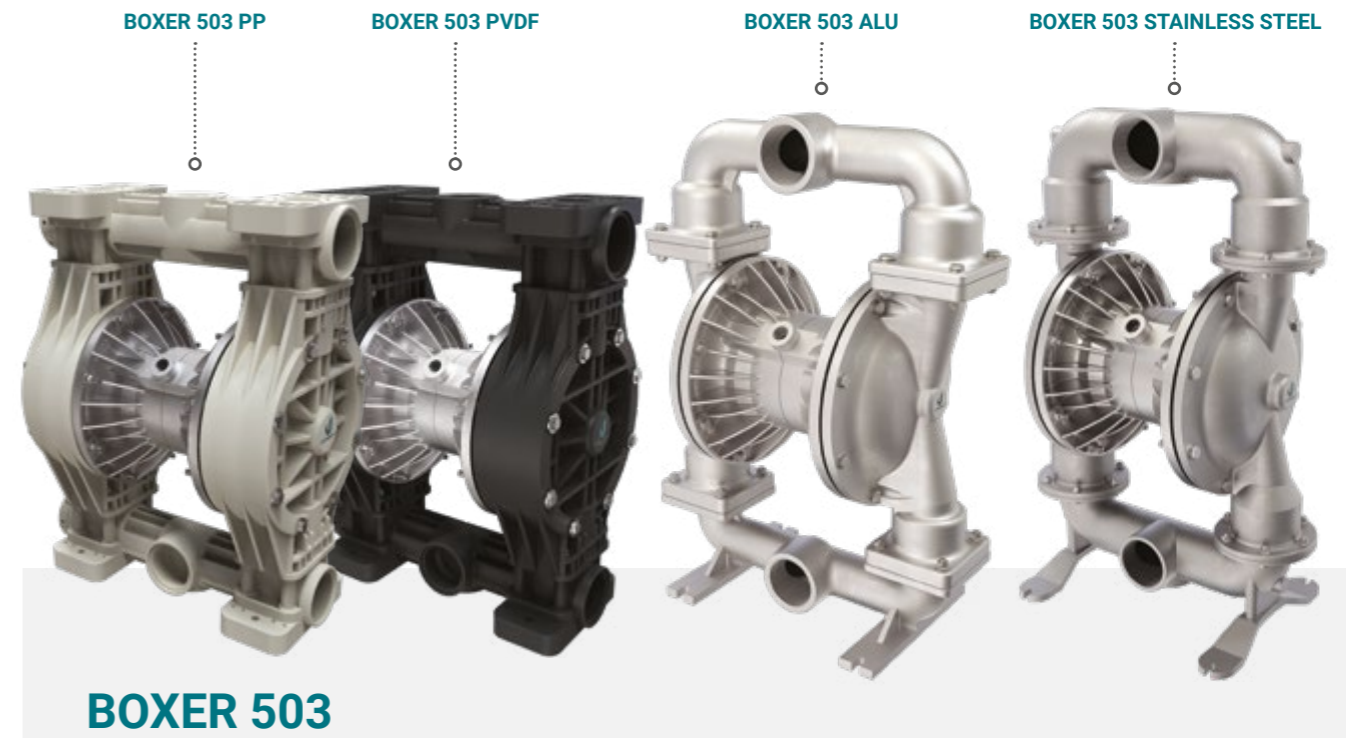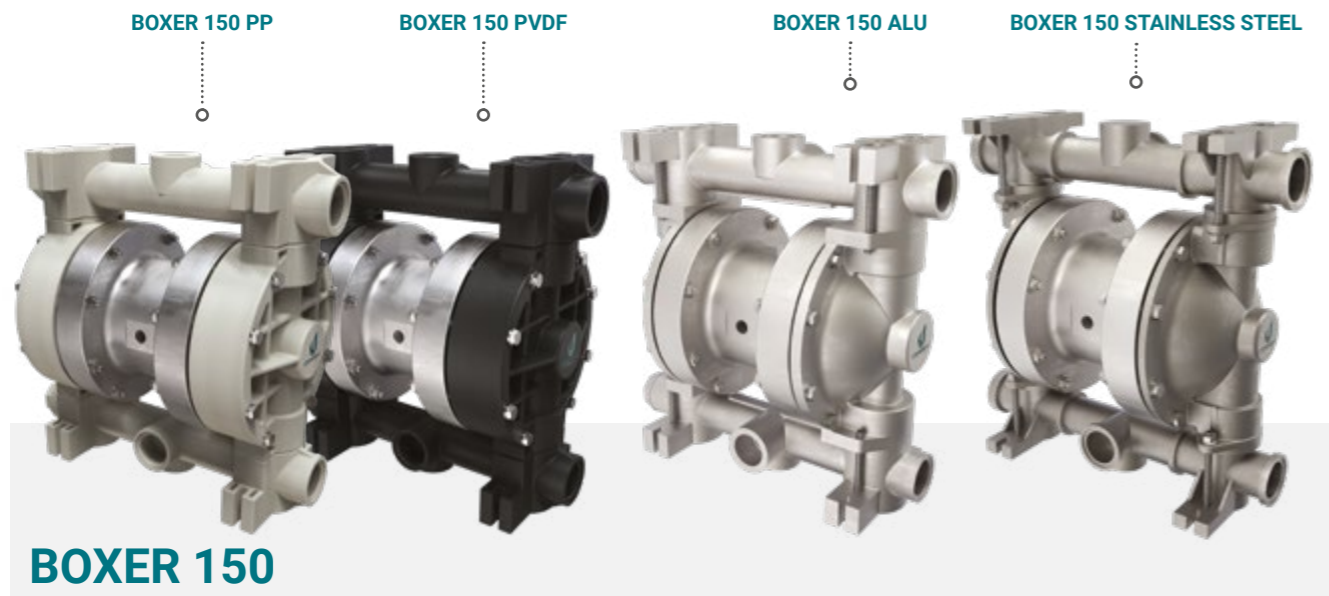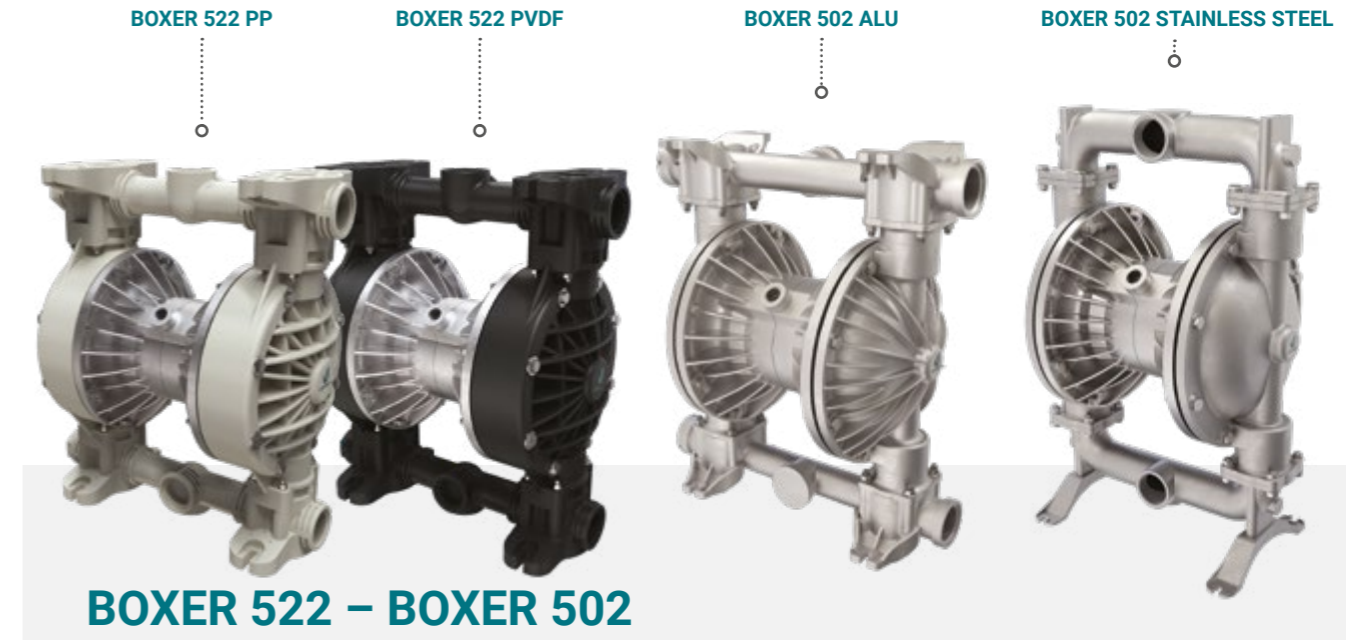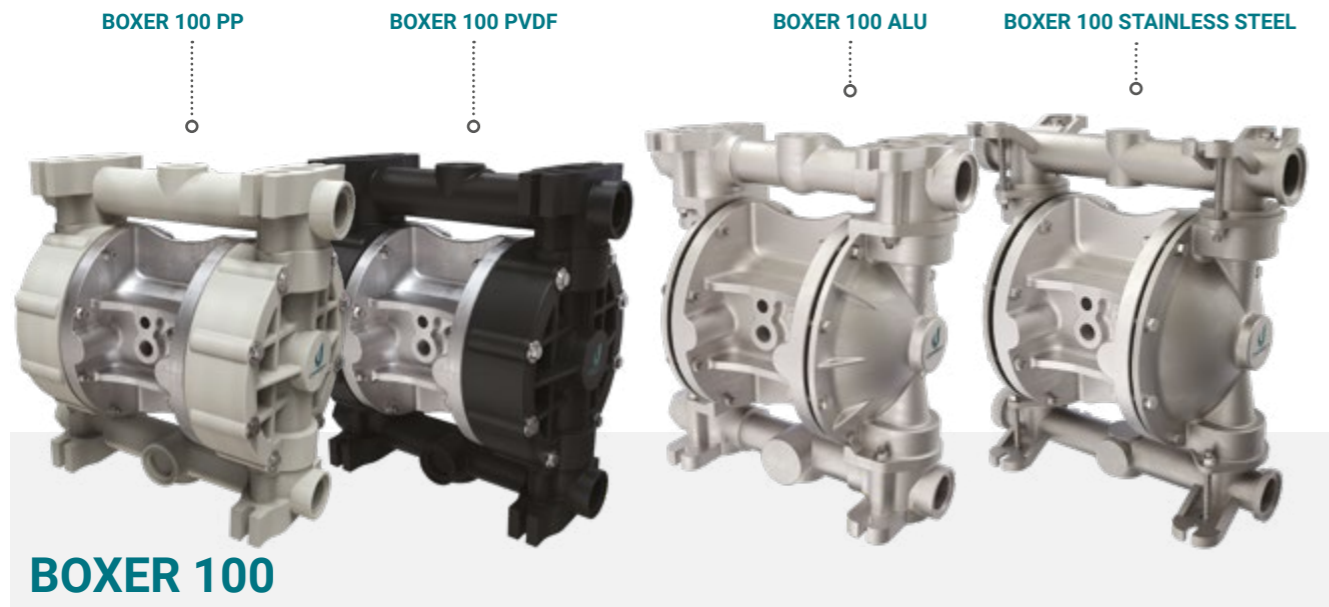


Boxer FPC 100



Specifications and types

 Zone 2 - Zone 22 II 3G Ex h IIB T4 Gc and II 3D Ex h IIIB T135°C Dc X
 Zone 1 - Zone 21 II 2G Ex h IIB T4 Gb and II 2D Ex h IIIB T135°C Db X
 M2 Zone I M2 Ex h I Mb X*
 Ex h IIB T4 Gb e Ex h IIIB T135°C Db

*The mining application string does not apply to aluminium pumps in the Boxer range

Suction / delivery connections	1" ANSI flanged - DN 25
Air fitting	3/8" f BSPP
Max. flow rate *	130 l/min
Max. supply air pressure	8 bar
Max. head	80 m
Max negative suction head - dry-running	4 m
Max negative suction head - with pump primed	9.5 m
Max. diameter suspended solids	4 mm
Noise	75 dB
Volume per stroke	250 cc

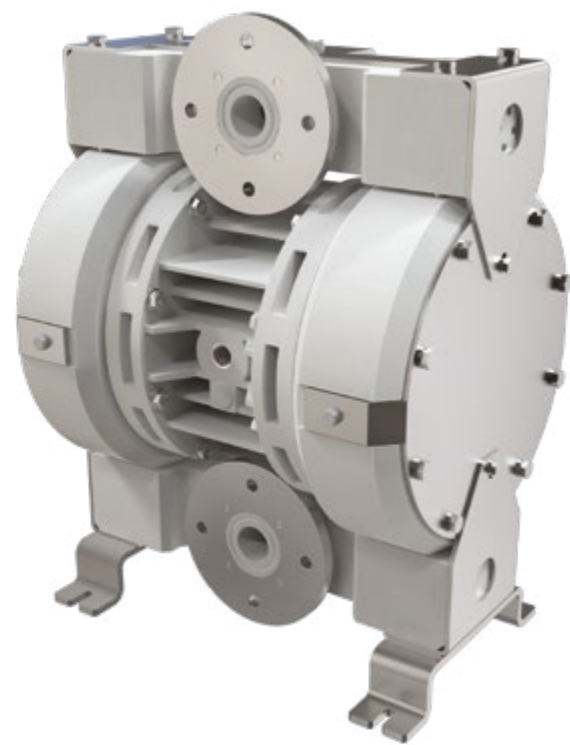


PLASTIC MATERIAL - PTFE		FPC 100
	Maximum dimensions	
	Height	399 mm
	Width	299 mm
	Depth	241 mm
	Construction mat. (casing and manifolds) and net weight	
	PTFE	21.6 Kg Temp. 3°C min. 95°C max

MAIN APPLICATION SECTORS




CHEMICAL INDUSTRY

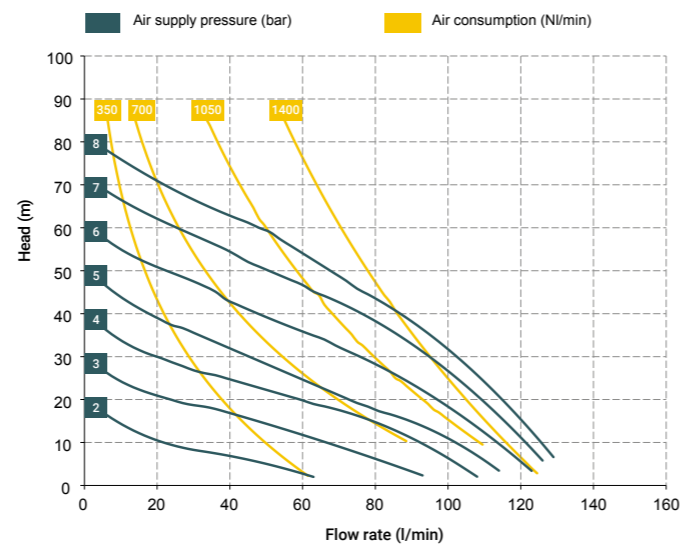

Boxer 35

Specifications and types



 Zone 2 - Zone 22 II 3G Ex h IIB T4 Gc and II 3D Ex h IIIB T135°C Dc X
 Zone 1 - Zone 21 II 2G Ex h IIB T4 Gb and II 2D Ex h IIIB T135°C Db X
 M2 Zone I M2 Ex h I Mb X*
 Ex h IIB T4 Gb e Ex h IIIB T135°C Db



*The mining application string does not apply to aluminium pumps in the Boxer range

Suction / delivery connections	1/2" f BSPP (*)
Air fitting	3/8" f BSPP
Max. flow rate*	35 l/min
Max. supply air pressure	8 bar
Max. head*	80 m
Max negative suction head - dry-running**	3 m
Max negative suction head - with pump primed	9.5 m
Max. diameter suspended solids	2 mm
Noise	65 dB
Volume per stroke	30 cc


(*) NPT fittings only on request
 * The curves and the performances refer to pumps with immersed suction and open delivery outlet, with water at 20°C and vary depending on material composition.
 ** The value depends on the pump configuration.




PLASTIC MATERIAL - PP (GF/CF)		Boxer 35
	Maximum dimensions	
	Height	168 mm
	Width	288 mm
	Depth	120 mm
	Construction mat. (casing and manifolds) and net weight	
	POLYPROPYLENE (with glass additive)	1.8 Kg Temp. 3°C min. 65°C max
	CONDUCTIVE POLYPROPYLENE (with carbon additive)	Temp. 3°C min. 65°C max

PLASTIC MATERIAL - PVDF		Boxer 35
	Maximum dimensions	
	Height	168 mm
	Width	288 mm
	Depth	120 mm
	Construction mat. (casing and manifolds) and net weight	
	PVDF (with carbon additive)	1.98 Kg Temp. 3°C min. 95°C max

MAIN APPLICATION SECTORS

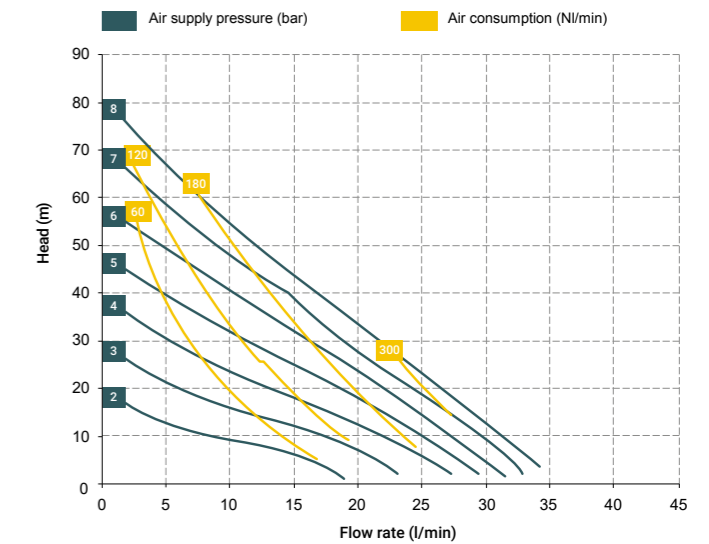

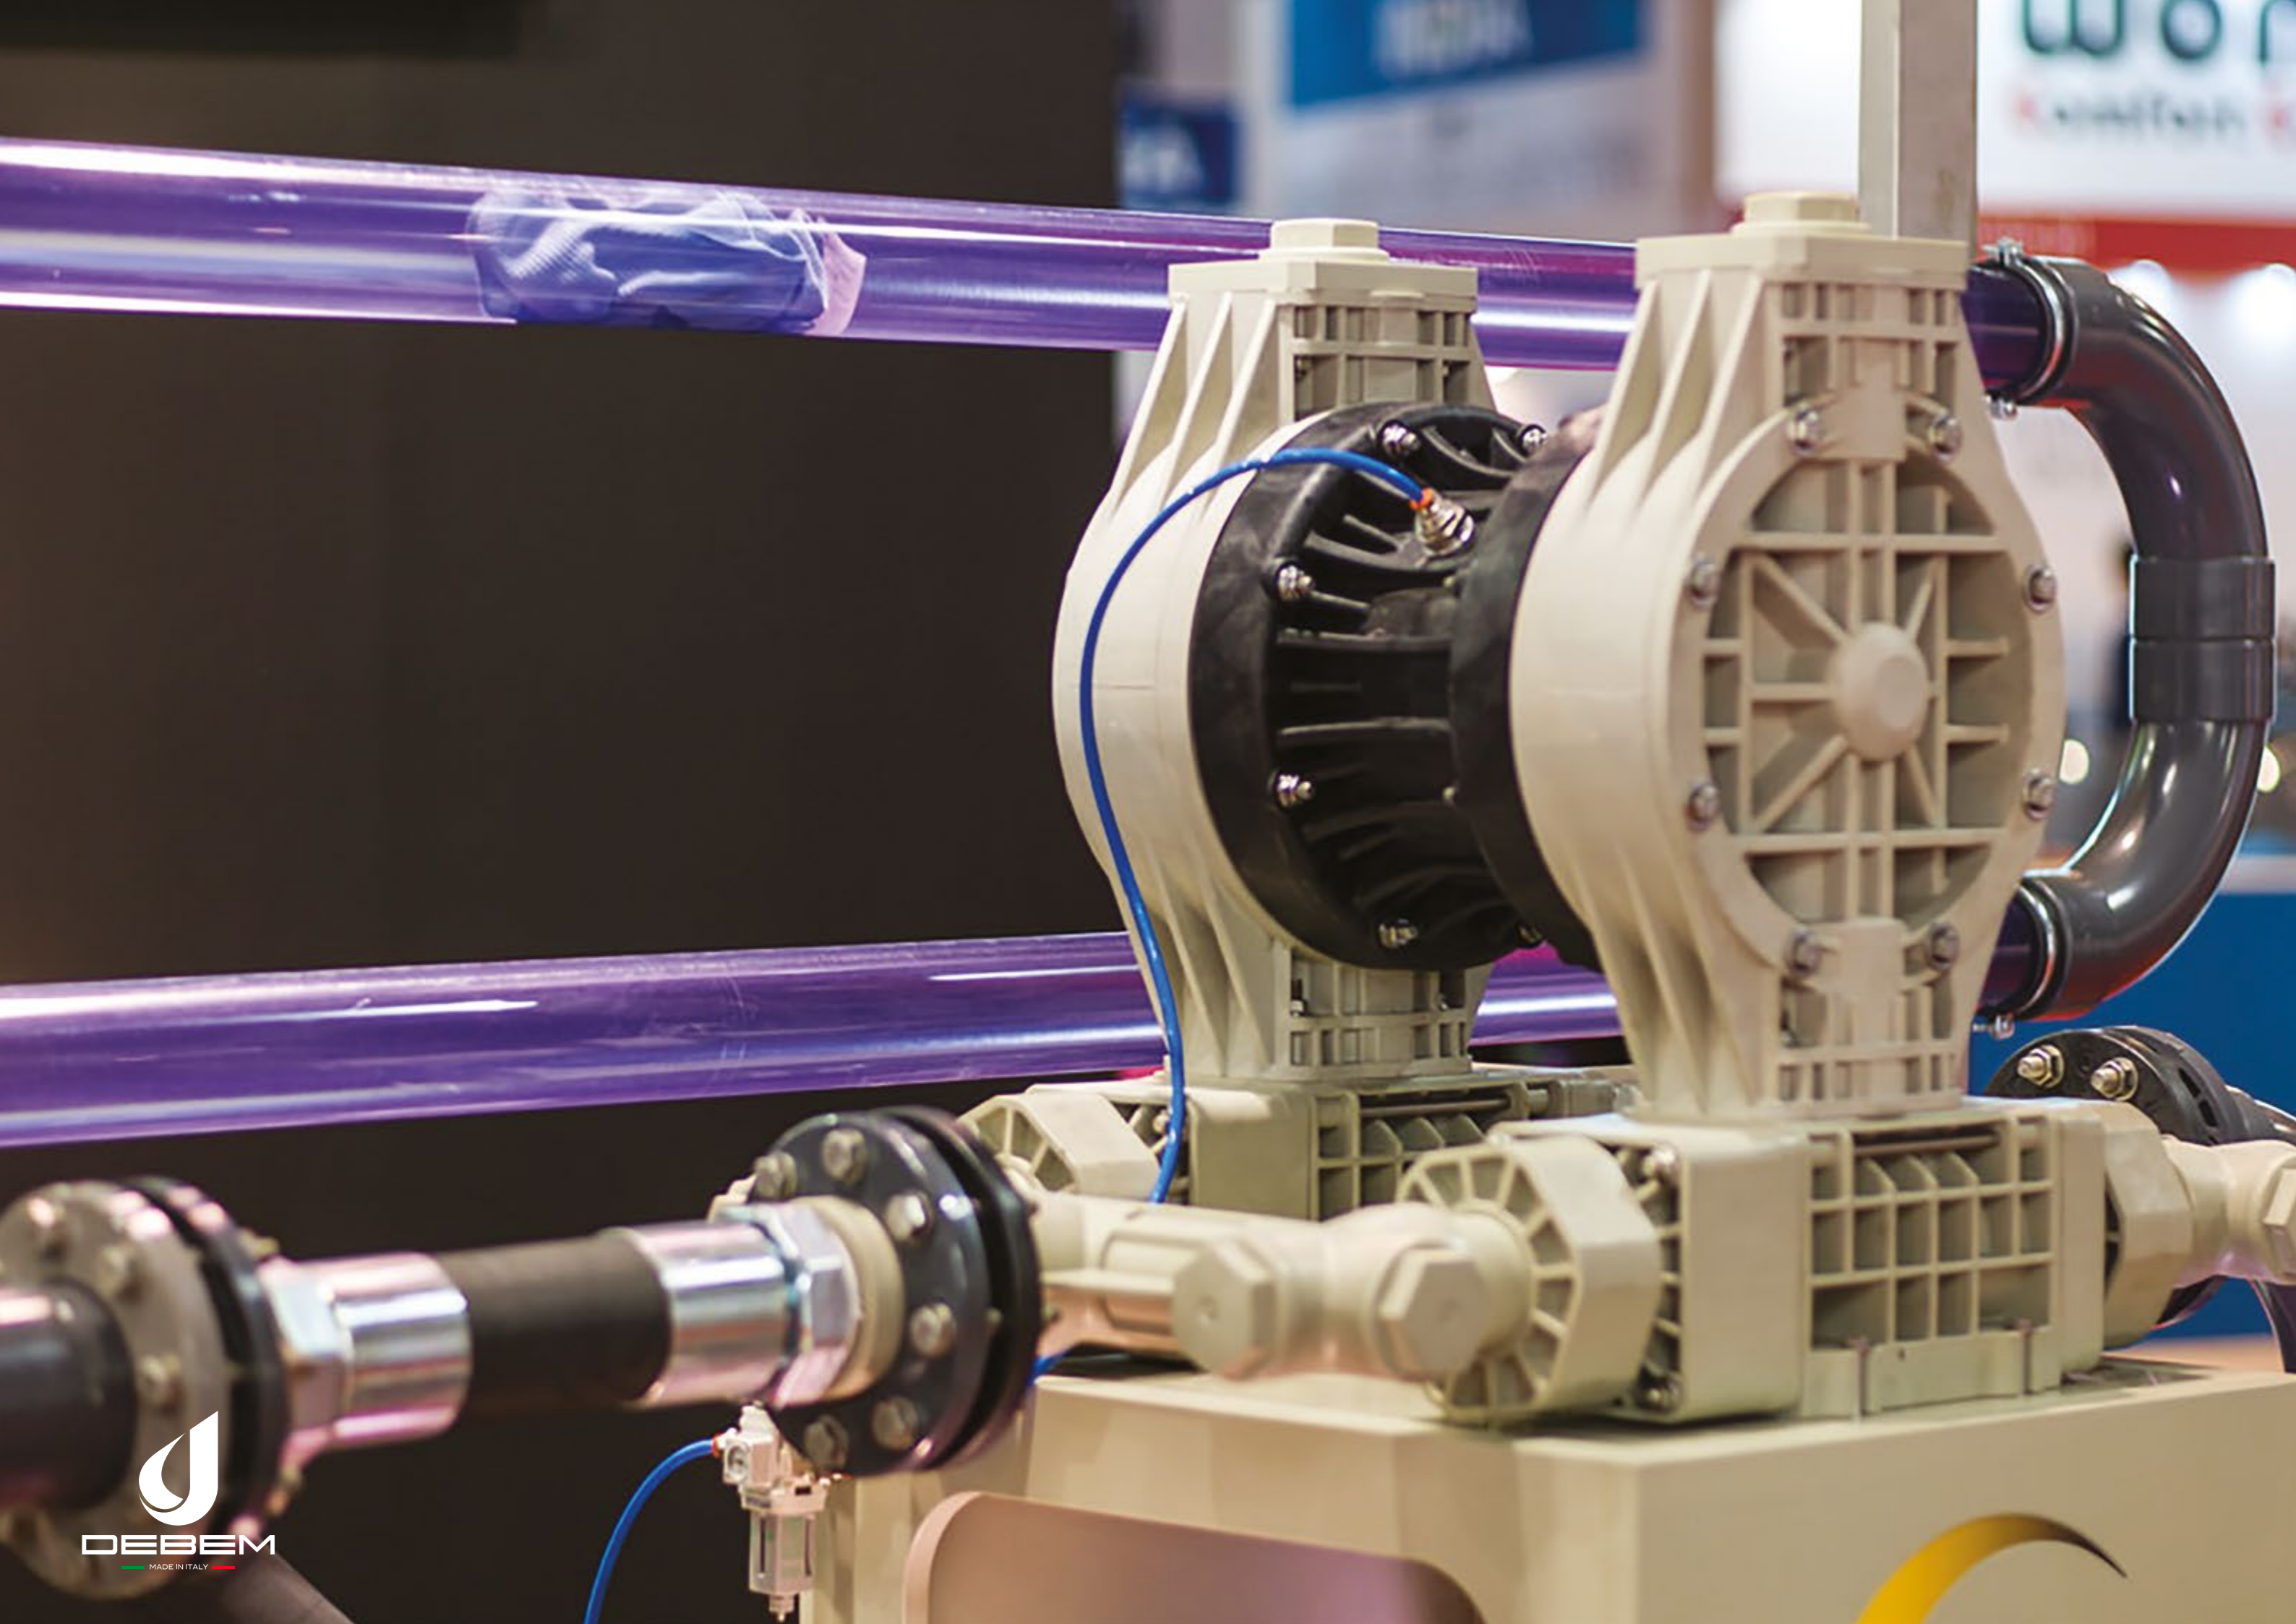

RC Remote Control

Debem's double diaphragm pumps in the RC line are designed for all needs to control the pump remotely or directly from the machine on which the pump may be installed, e.g. during product measurement or dosing.

The RC pumps are always operated with compressed air. All the pumps of the RC line are ATEX certified, constructed in Polypropylene or PVDF in the plastic version or in Aluminium or AISI 316 L for the metal versions. Boxer pumps are ideal for pumping liquids with high apparent viscosity, even if containing suspended solids. The vast range of materials available for the parts in contact with the fluid, such as pump

casings and manifolds, diaphragms, balls, ball seats and o-rings, makes them compatible with any type of fluid present on the market. They can be used in numerous applications.



- Product designed and constructed in Italy
- Executions in PP+GF, PP+CF, ECTFE, PVDF, Stainless Steel AISI 316 (L), Aluminium
- ATEX certification for ZONE 1 – ZONE 2
- Self priming
- Supports dry running
- Operation with non-lubricated air
- Adjustable flow rate and head
- Fine adjustment of the speed at constant P
- Total control of diaphragm stroke
- Suitable for pumping fluids with high viscosity and for demanding applications
- Possibility of pumping fluids containing suspended solids
- Manifolds can be supplied with stainless steel reinforcement rings for pumps in PP+GF – PP+CF – PVDF
- Manifolds: can be split on request
- Possibility of suspended installation
- Customisable delivery and suction connections
- Quick and fast maintenance
- Long Life profile diaphragms (available in different elastomers) for greater resistance and longer life
- Operating Temperatures:
 - PP+GF, PP+CF DA +3°C A +65°C
 - ECTFE, PVDF, Aluminium, AISI 316 (L) +3°C at + 95°C

Smidgetbox

Specifications and types

Zone 2 - Zone 22 II 3G Ex h IIB T4 Gc and II 3D Ex h IIIB T135°C Dc X
 Zone 1 - Zone 21 II 2G Ex h IIB T4 Gb and II 2D Ex h IIIB T135°C Db X

Suction / delivery connections	BSPP 1/4" f (*)
Air fitting	BSPP 1/8" f
Max. flow rate	6 l/min
Max. supply air pressure	8 bar
Max negative suction head - dry-running	3 m
Max negative suction head - with pump primed	9.5 m
Max. diameter suspended solids	0 mm
Noise	60 dB
Volume per stroke	3.2 cc

(*) NPT fittings on request




PLASTIC MATERIAL - PP (GF/CF) Smidgetbox

Maximum dimensions	
Height	75 mm
Width	86 mm
Depth	60 mm

Construction mat. (casing and manifolds) and net weight	
POLYPROPYLENE (with glass additive)	0.4 Kg
	Temp. 3°C min. 65°C max

CONDUCTIVE POLYPROPYLENE (with carbon additive)	0.4 Kg
	Temp. 3°C min. 65°C max

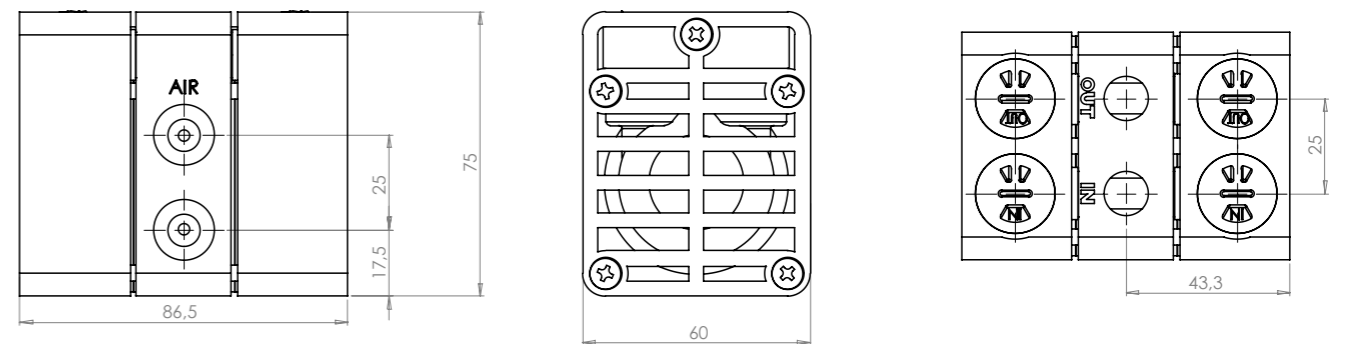


MAIN APPLICATION SECTORS

GRAPHIC INDUSTRY	WATER AND SLUDGE TREATMENT	CHEMICAL INDUSTRY	GALVANIC AND ELECTRONIC INDUSTRY
------------------	----------------------------	-------------------	----------------------------------

Scubic 15

Specifications and types


 Zone 2 - Zone 22
 II 3G Ex h IIB T4 Gc and II 3D Ex h IIIB T135°C Dc X
 Zone 1 - Zone 21
 II 2G Ex h IIB T4 Gb and II 2D Ex h IIIB T135°C Db X


Suction / delivery connections	BSPP 3/8" f (*)
Air fitting	BSPP 1/4" f
Max. flow rate	17 l/min
Max. supply air pressure	8 bar
Max negative suction head - dry-running	3 m
Max negative suction head - with pump primed	9.5 m
Max. diameter suspended solids	0.5 mm
Noise	65 dB
Volume per stroke	10.3 cc

(*) NPT fittings on request




PLASTIC MATERIAL - PP (GF/CF) Scubic 15


	Maximum dimensions	
	Height	106 mm
	Width	168 mm
	Depth	106 mm

	Construction mat. (casing and manifolds) and net weight	
	POLYPROPYLENE (with glass additive)	1.25 Kg Temp. 3°C min. 65°C max



	CONDUCTIVE POLYPROPYLENE (with carbon additive)	1.25 Kg Temp. 3°C min. 65°C max
--	--	---------------------------------------

PLASTIC MATERIAL - ECTFE Scubic 15

	Maximum dimensions	
	Height	106 mm
	Width	168 mm
	Depth	106 mm


	Construction mat. (casing and manifolds) and net weight	
	ECTFE	1.25 Kg Temp. 3°C min. 95°C max

MAIN APPLICATION SECTORS

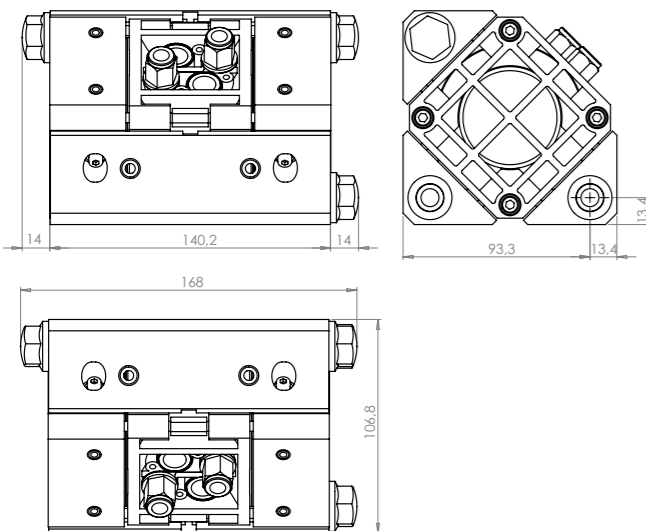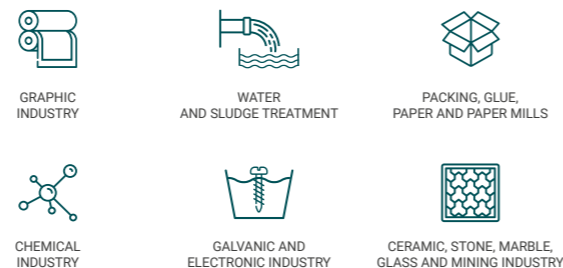

Sboxer 7

Specifications and types


 Zone 2 - Zone 22
 II 3G Ex h IIB T4 Gc and II 3D Ex h IIIB T135°C Dc X
 Zone 1 - Zone 21
 II 2G Ex h IIB T4 Gb and II 2D Ex h IIIB T135°C Db X


Suction / delivery connections	BSPP 1/4" f (*)
Air fitting	BSPP 1/8" f
Max. flow rate	9 l/min
Max. supply air pressure	8 bar
Max negative suction head - dry-running	4 m
Max negative suction head - with pump primed	9.5 m
Max. diameter suspended solids	0.5 mm
Noise	65 dB
Volume per stroke	3.2 cc

(*) NPT fittings on request




PLASTIC MATERIAL - PP (GF/CF) Sboxer 7


	Maximum dimensions	
	Height	120 mm
	Width	137 mm
	Depth	69 mm

	Construction mat. (casing and manifolds) and net weight	
	POLYPROPYLENE (with glass additive)	0.68 Kg Temp. 3°C min. 65°C max


	CONDUCTIVE POLYPROPYLENE (with carbon additive)	1.25 Kg Temp. 3°C min. 65°C max
--	--	---------------------------------------

PLASTIC MATERIAL - PVDF Sboxer 7

	Maximum dimensions	
	Height	120 mm
	Width	137 mm
	Depth	69 mm

	Construction mat. (casing and manifolds) and net weight	
	POLYPROPYLENE (with glass additive)	0.83 Kg Temp. 3°C min. 95°C max

MAIN APPLICATION SECTORS

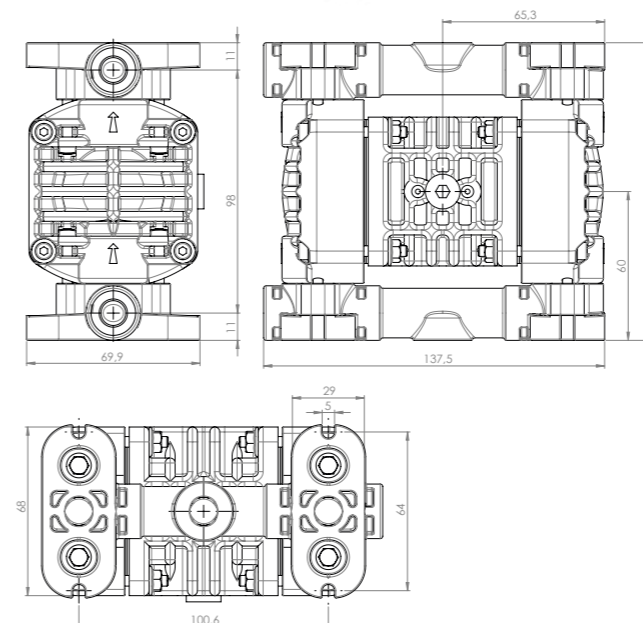

Sboxer 15

Specifications and types

Zone 2 - Zone 22 II 3G Ex h IIB T4 Gc and II 3D Ex h IIIB T135°C Dc X
Zone 1 - Zone 21 II 2G Ex h IIB T4 Gb and II 2D Ex h IIIB T135°C Db X

Suction / delivery connections	BSPP 3/8" f (*)
Air fitting	BSPP 3/8" f
Max. flow rate	17 l/min
Max. supply air pressure	8 bar
Max negative suction head - dry-running	3 m
Max negative suction head - with pump primed	9.5 m
Max. diameter suspended solids	0.5 mm
Noise	65 dB
Volume per stroke	10.3 cc

(*) NPT fittings on request




PLASTIC MATERIAL PP (GF/CF) - PVDF Sboxer 15

	Maximum dimensions
Height	149 mm
Width	147 mm
Depth	80 mm

	Construction mat. (casing and manifolds) and net weight
POLYPROPYLENE (with glass additive)	1.1 Kg Temp. 3°C min. 65°C max

CONDUCTIVE POLYPROPYLENE (with carbon additive)	1.3 Kg Temp. 3°C min. 65°C max
--	--------------------------------------


PVDF (with carbon additive)	1.38 Kg Temp. 3°C min. 95°C max
------------------------------------	---------------------------------------

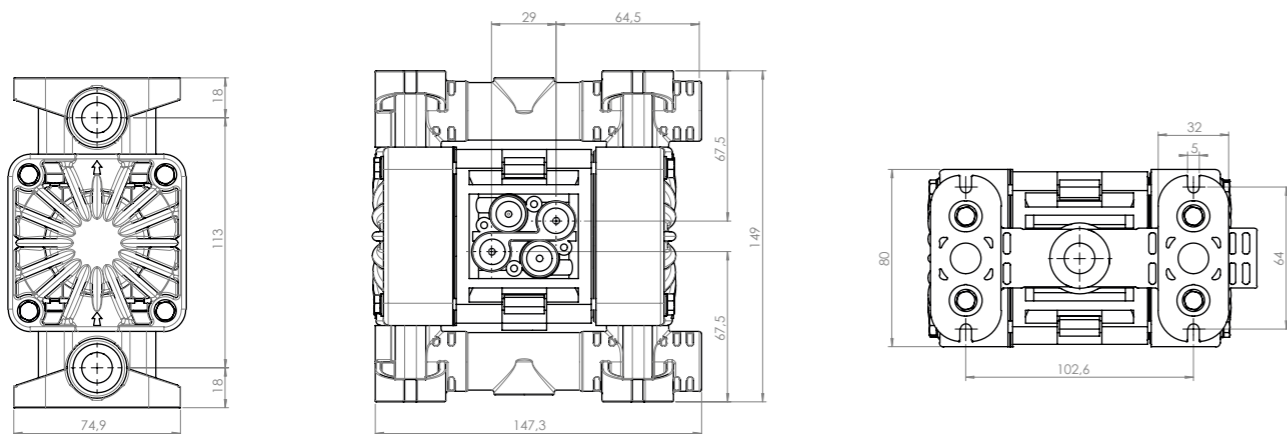

METAL MATERIAL - ALU Sboxer 15

	Maximum dimensions
Height	149 mm
Width	147 mm
Depth	80 mm


	Construction mat. (casing and manifolds) and net weight
ALU	1.9 Kg Temp. 3°C min. 95°C max

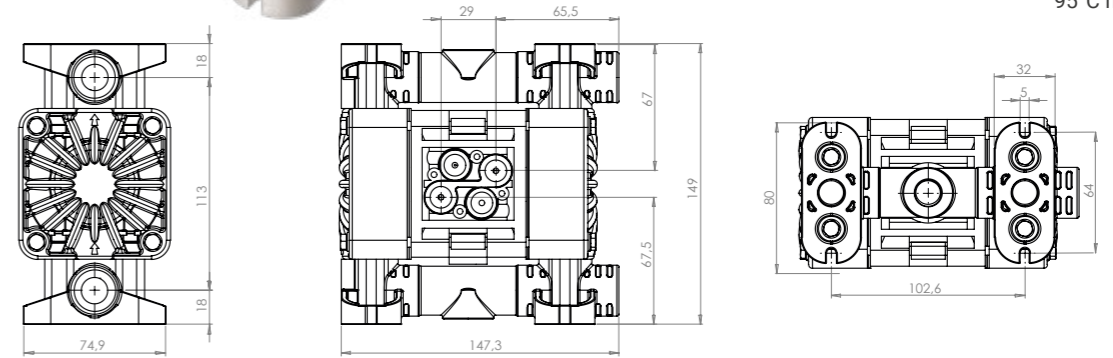


METAL MATERIAL - AISI 316 L Sboxer 15

	Maximum dimensions
Height	140 mm
Width	152 mm
Depth	80 mm

	Construction mat. (casing and manifolds) and net weight
AISI 316 L	2.4 kg Temp. 3°C min. 95°C max

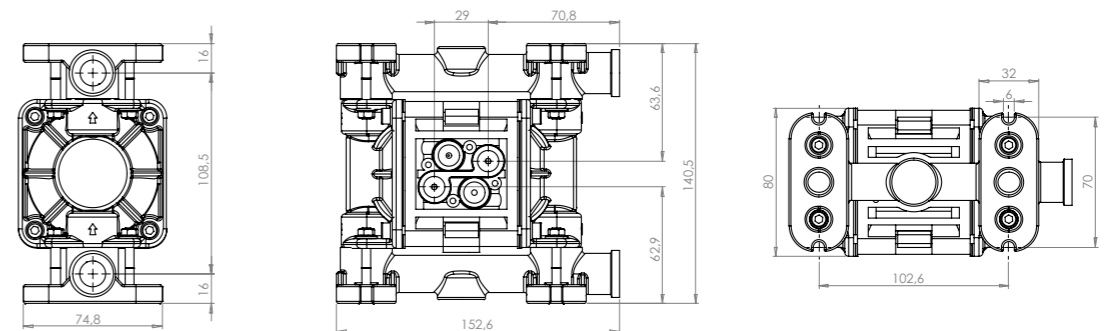

MAIN APPLICATION SECTORS



Smicroboxer

Specifications and types

Zone 2 - Zone 22 II 3G Ex h IIB T4 Gc and II 3D Ex h IIIB T135°C Dc X
 Zone 1 - Zone 21 II 2G Ex h IIB T4 Gb and II 2D Ex h IIIB T135°C Db X

Suction / delivery connections	BSPP 1/2" f (*)
Air fitting	BSPP 1/4" f
Max. flow rate	35 l/min
Max. supply air pressure	8 bar
Max negative suction head - dry-running	4 m
Max negative suction head - with pump primed	9.5 m
Max. diameter suspended solids	2 mm
Noise	65 dB
Volume per stroke	30 cc

(*) NPT fittings on request




PLASTIC MATERIAL PP (GF/CF) - PVDF Smicroboxer

Maximum dimensions	
Height	168 mm
Width	167 mm
Depth	120 mm

Construction mat. (casing and manifolds) and net weight	
POLYPROPYLENE (with glass additive)	1.63 Kg
	Temp. 3°C min. 65°C max

CONDUCTIVE POLYPROPYLENE (with carbon additive)	1.63 Kg
	Temp. 3°C min. 65°C max


PVDF (with carbon additive)	1.93 Kg
	Temp. 3°C min. 95°C max

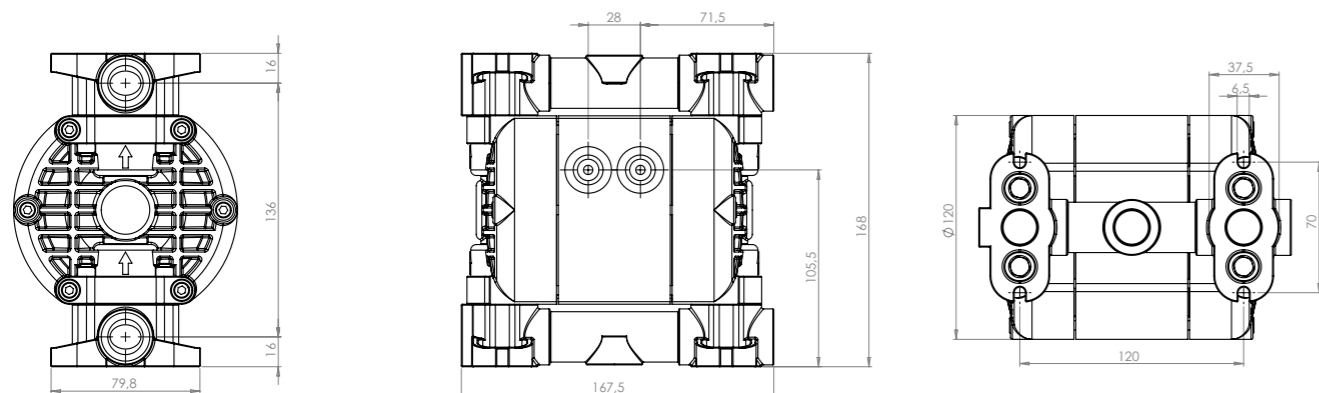

METAL MATERIAL - ALU Smicroboxer

Maximum dimensions	
Height	172 mm
Width	164 mm
Depth	120 mm


Construction mat. (casing and manifolds) and net weight	
ALU	2.03 Kg
	Temp. 3°C min. 95°C max

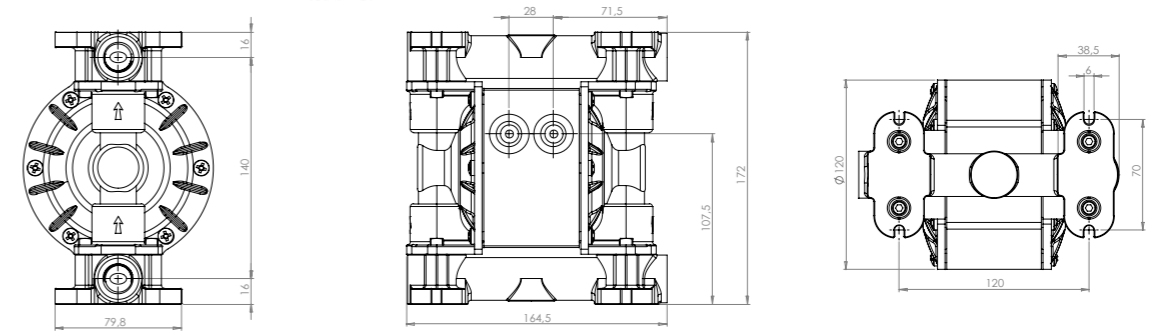

METAL MATERIAL - AISI 316 L Smicroboxer

Maximum dimensions	
Height	171 mm
Width	171 mm
Depth	120 mm

Construction mat. (casing and manifolds) and net weight	
AISI 316 L	3.83 Kg
	Temp. 3°C min. 95°C max

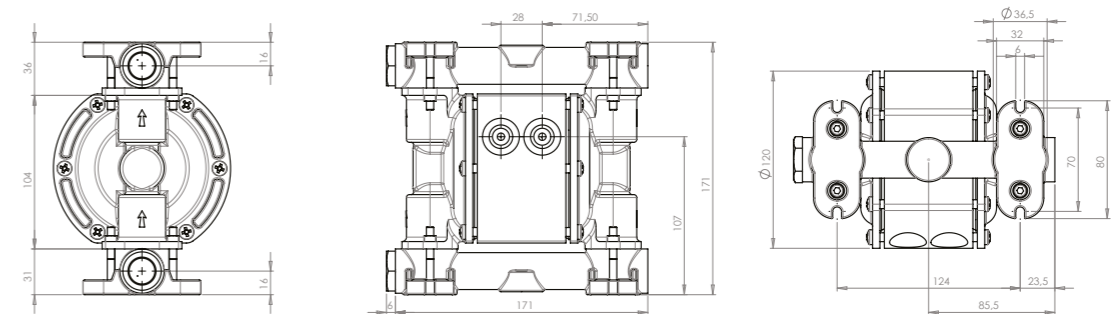


MAIN APPLICATION SECTORS

- GRAPHIC INDUSTRY
- GOLD PROCESSING INDUSTRY
- PRODUCTION AND STORAGE OF BIODIESEL
- CHEMICAL INDUSTRY
- GALVANIC AND ELECTRONIC INDUSTRY
- PAINT INDUSTRY

Sboxer 50 / Sminiboxer

Specifications and types

 Zone 2 - Zone 22 II 3G Ex h IIB T4 Gc and II 3D Ex h IIIB T135°C Dc X
 Zone 1 - Zone 21 II 2G Ex h IIB T4 Gb and II 2D Ex h IIIB T135°C Db X

Suction / delivery connections	BSPP 1/2" f (*)
Air fitting	BSPP 3/8" f
Max. flow rate	60 l/min
Max. supply air pressure	8 bar
Max negative suction head - dry-running	4 m
Max negative suction head - with pump primed	9.5 m
Max. diameter suspended solids	4 mm
Noise	70 dB
Volume per stroke	67 cc

(*) NPT fittings on request




PLASTIC MATERIAL PP (GF/CF) - PVDF Sboxer 50

Maximum dimensions	
Height	240 mm
Width	246 mm
Depth	152 mm

Construction mat. (casing and manifolds) and net weight	
POLYPROPYLENE (with glass additive)	2.98 Kg Temp. 3°C min. 65°C max

CONDUCTIVE POLYPROPYLENE (with carbon additive)	2.98 Kg Temp. 3°C min. 65°C max
--	---------------------------------------


PVDF (with carbon additive)	2.98 Kg Temp. 3°C min. 95°C max
------------------------------------	---------------------------------------

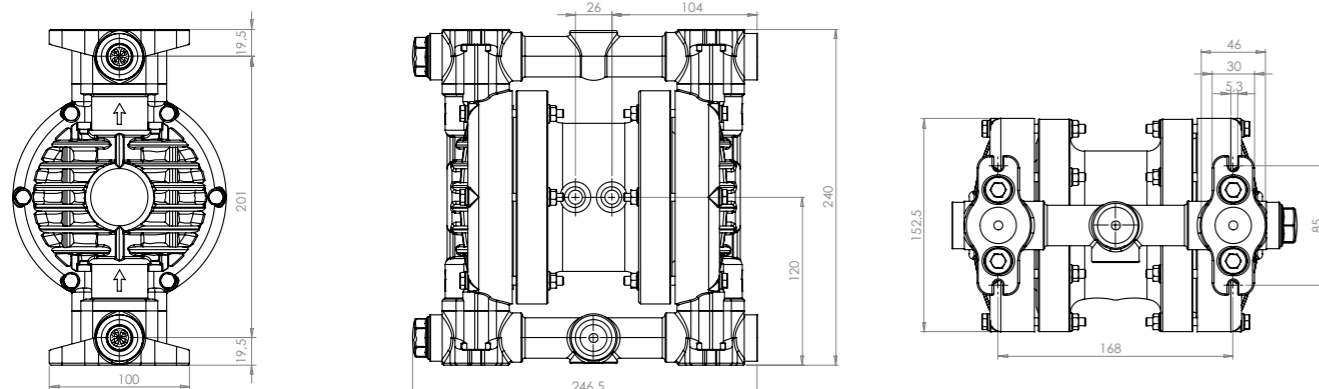

METAL MATERIAL - ALU Sboxer 50

Maximum dimensions	
Height	234 mm
Width	240 mm
Depth	152 mm


Construction mat. (casing and manifolds) and net weight	
ALU	3.92 Kg Temp. 3°C min. 95°C max

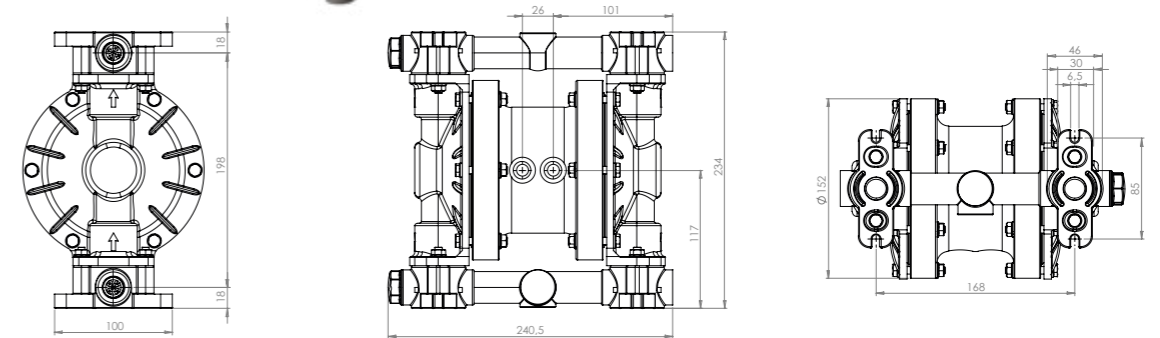

METAL MATERIAL - AISI 316 L Sminiboxer

Maximum dimensions	
Height	232 mm
Width	232 mm
Depth	152 mm

Construction mat. (casing and manifolds) and net weight	
AISI 316 L	6.15 Kg Temp. 3°C min. 95°C max

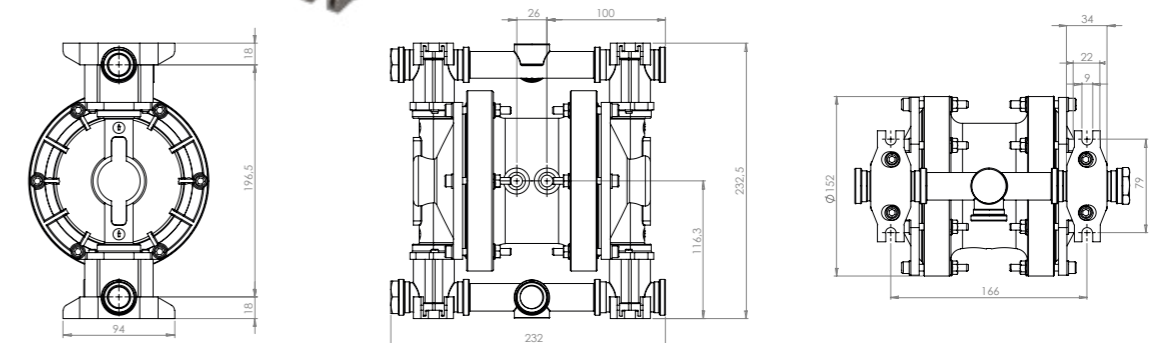

MAIN APPLICATION SECTORS



Sboxer 81 / Sboxer 90

Specifications and types

Zone 2 - Zone 22 II 3G Ex h IIB T4 Gc and II 3D Ex h IIIB T135°C Dc X
Zone 1 - Zone 21 II 2G Ex h IIB T4 Gb and II 2D Ex h IIIB T135°C Db X

Suction / delivery connections	BSPP 1" f
Air fitting	BSPP 3/8" f
Max. flow rate	110 l/min
Max. supply air pressure	8 bar
Max negative suction head - dry-running	4 m
Max negative suction head - with pump primed	9.5 m
Max. diameter suspended solids	4 mm
Noise	70 dB
Volume per stroke	100 cc




PLASTIC MATERIAL PP (GF/CF) - PVDF Sboxer 81

	Maximum dimensions
Height	274 mm
Width	308 mm
Depth	170 mm

	Construction mat. (casing and manifolds) and net weight
POLYPROPYLENE (with glass additive)	5 Kg Temp. 3°C min. 65°C max

CONDUCTIVE POLYPROPYLENE (with carbon additive)	5 Kg Temp. 3°C min. 65°C max
---	------------------------------------

PVDF (with carbon additive)	6.4 Kg Temp. 3°C min. 95°C max
-----------------------------	--------------------------------------

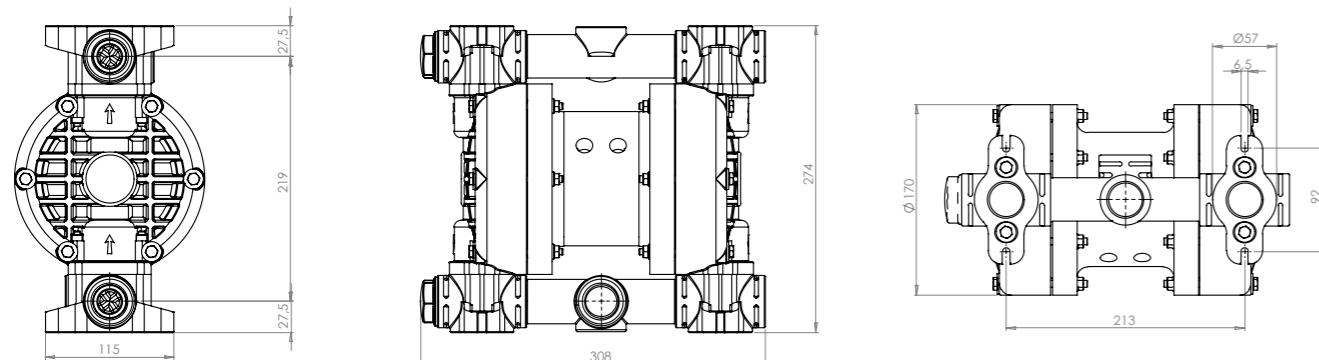


METAL MATERIAL - AISI 316

Sboxer 81

	Maximum dimensions
Height	275 mm
Width	304 mm
Depth	170 mm

	Construction mat. (casing and manifolds) and net weight
AISI 316	11 kg Temp. 3°C min. 95°C max

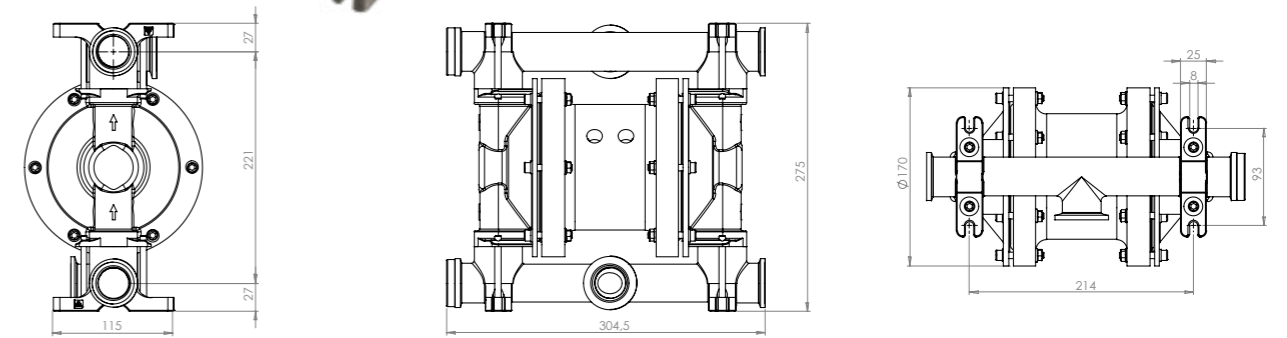


METAL MATERIAL - ALU

Sboxer 90

	Maximum dimensions
Height	291 mm
Width	293 mm
Depth	170 mm

	Construction mat. (casing and manifolds) and net weight
ALU	7.4 Kg Temp. 3°C min. 95°C max

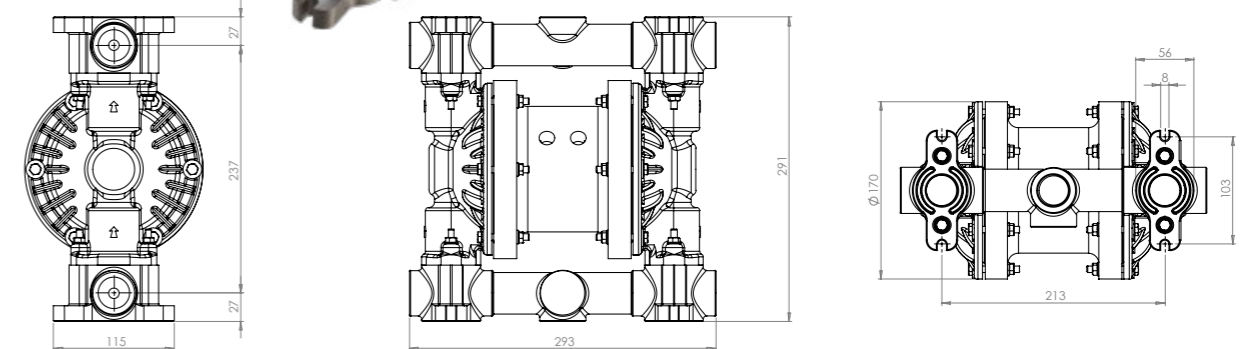


MAIN APPLICATION SECTORS



Sboxer 100


Specifications and types


 Zone 2 - Zone 22 II 3G Ex h IIB T4 Gc and II 3D Ex h IIIB T135°C Dc X
 Zone 1 - Zone 21 II 2G Ex h IIB T4 Gb and II 2D Ex h IIIB T135°C Db X

Suction / delivery connections	BSPP 1" f
Air fitting	BSPP 3/8" f
Max. flow rate	160 l/min
Max. supply air pressure	8 bar
Max negative suction head - dry-running	4 m
Max negative suction head - with pump primed	9.5 m
Max. diameter suspended solids	4 mm
Noise	75 dB
Volume per stroke	222 cc






PLASTIC MATERIAL PP (GF/CF) - PVDF Sboxer 100

	Maximum dimensions	
	Height	324 mm
	Width	329 mm
Depth	201 mm	

	Construction mat. (casing and manifolds) and net weight	
	POLYPROPYLENE (with glass additive)	7.87 Kg Temp. 3°C min. 65°C max


CONDUCTIVE POLYPROPYLENE (with carbon additive)	7.87 Kg Temp. 3°C min. 65°C max
--	---------------------------------------


PVDF (with carbon additive)	7.87 Kg Temp. 3°C min. 95°C max
------------------------------------	---------------------------------------

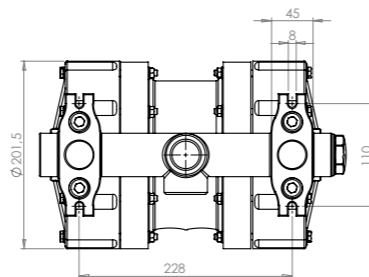
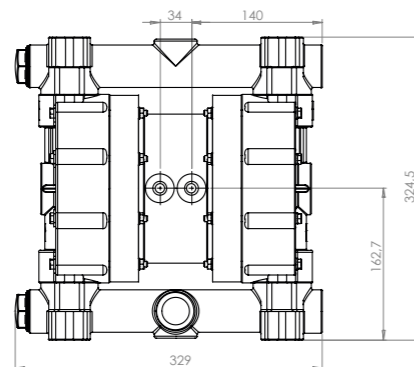
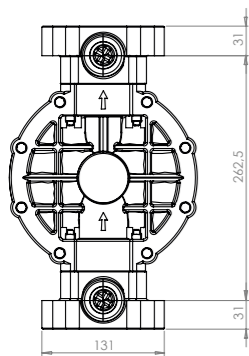


METAL MATERIAL - ALU

Sboxer 100


	Maximum dimensions	
	Height	322 mm
	Width	307 mm
Depth	200 mm	


	Construction mat. (casing and manifolds) and net weight	
	ALU	8.5 kg Temp. 3°C min. 95°C max

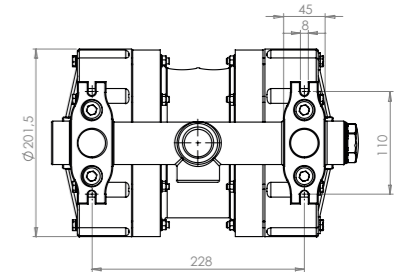
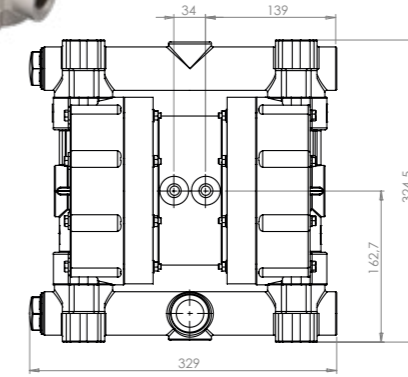



METAL MATERIAL - AISI 316

Sboxer 100

	Maximum dimensions	
	Height	324 mm
	Width	329 mm
Depth	201 mm	

	Construction mat. (casing and manifolds) and net weight	
	AISI 316	12.2 Kg Temp. 3°C min. 95°C max

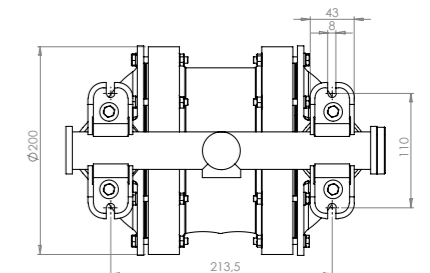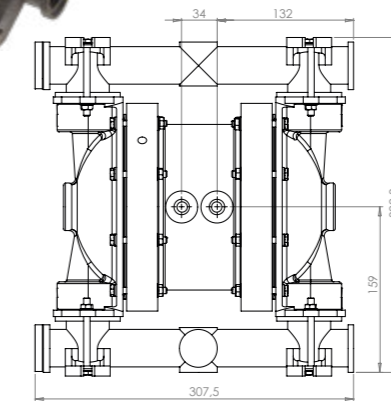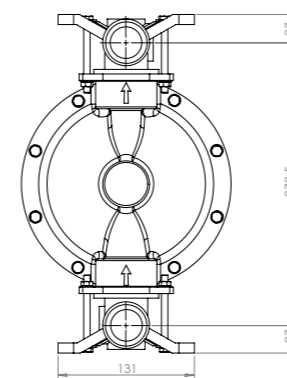

MAIN APPLICATION SECTORS




Fullflow 502

The new Fullflow 502 pump is fitted with flaps instead of balls, which allow the passage of large-sized solids, reducing at the same time the crushing normally associated to the passage through balls and cages.


Although the maximum diameter of the solids passage, 45 mm, is not unique, their maximum length of 600 mm for this type of pump is. Similarly, the flap circuit placed below, perpendicular to the fluid cham-

bers rather than on axis, is a patented exclusive: the fluid-dynamic consequences of this choice mean that the solids flow out of the pump casing, following a linear path at the lower level of the pump.

The maximum flow rate of the pump is about 530 litres per minute.

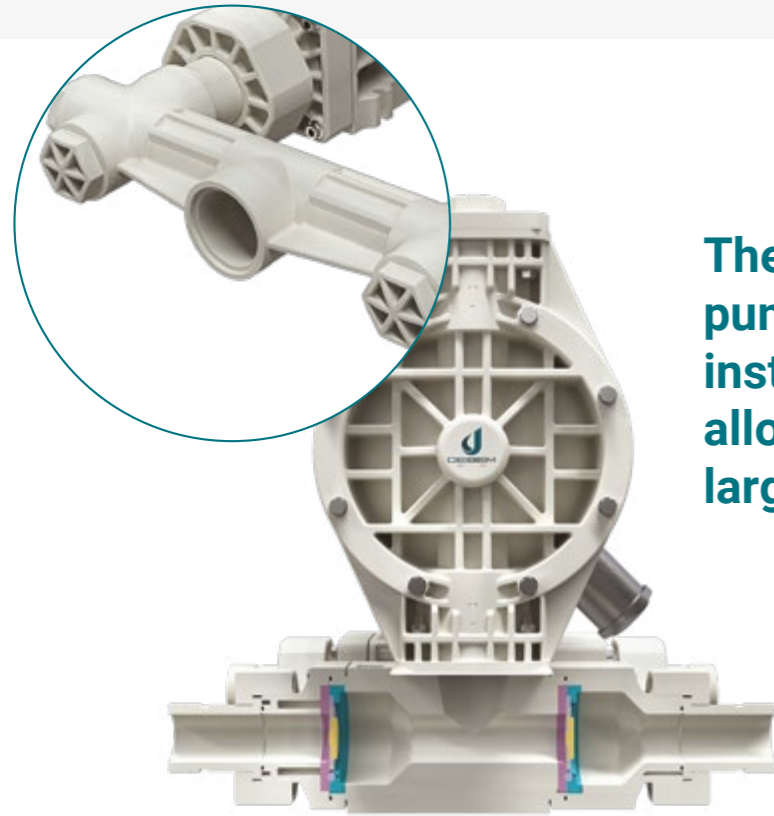

The new Fullflow 502 pump is fitted with flaps instead of balls, that allow the passage of large solids

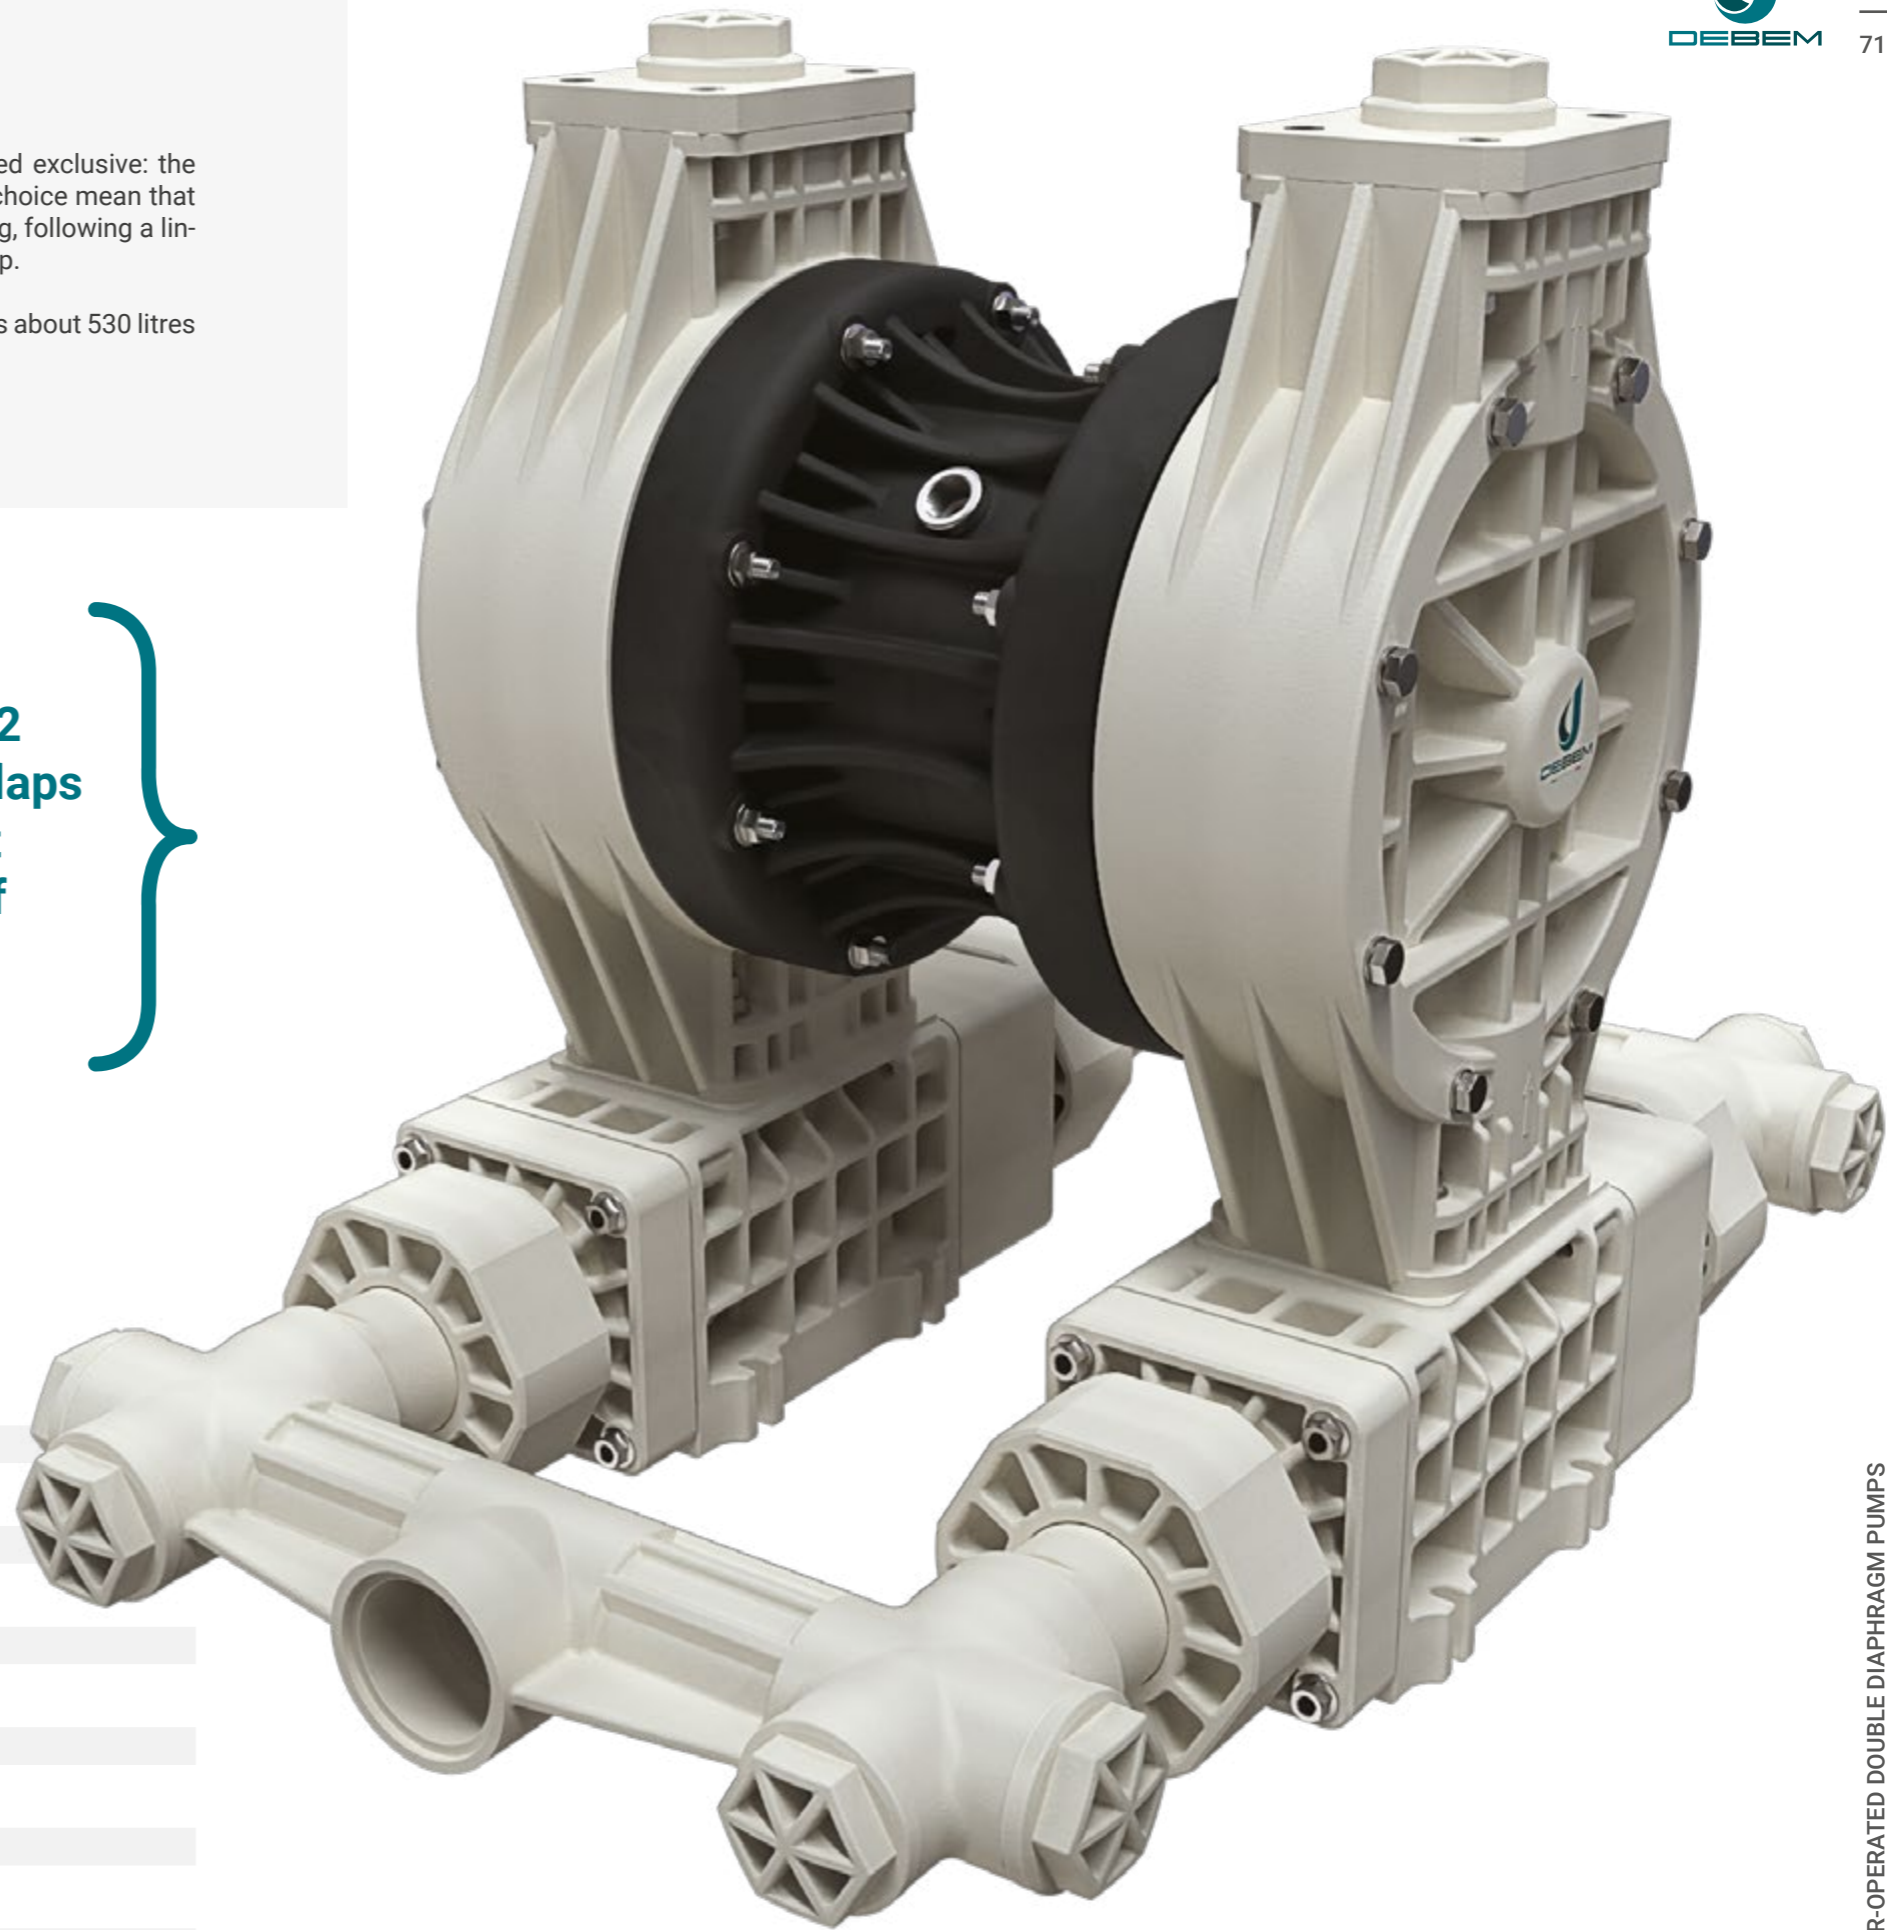

- Product designed in Italy
- Polypropylene casing
- Patented stall protection pneumatic circuit
- Operation with non-lubricated air
- Flap in EPDM or NBR or natural rubber, core in AISI 316 (not in contact with the fluid)
- Can be split in suction and delivery
- Self priming
- Supports dry running
- Adjustable operating speed
- Versatility of use
- Possibility of pumping fluids containing suspended solids
- Suitable for continuous use

Fullflow 502

Specifications and types

Zone 2 - Zone 22	II 3G Ex h IIB T4 Gc and II 3D Ex h IIIB T135°C Dc X
Zone 1 - Zone 21	II 2G Ex h IIB T4 Gb and II 2D Ex h IIIB T135°C Db X
M2 Zone	I M2 Ex h I Mb X*
Ex h IIB T4 Gb e Ex h IIIB T135°C Db	


*The mining application string does not apply to aluminium pumps in the Boxer range

Suction / delivery connections	2"1/2 f (BSPP) or DN 65
Air fitting	1/2" f BSPP
Max. flow rate*	530 l/min
Max. supply air pressure	4 bar
Max. head*	40 m
Max negative suction head - dry-running	3.5 m
Max. diameter suspended solids	45 mm
Max length of solids	600 mm

*The curves and the performances refer to pumps with immersed suction and open delivery outlet, with water at 20°C and vary depending on material composition.





PLASTIC MATERIAL - PP (GF/CF)		Fullflow 502
Maximum dimensions		
Height		696 mm
Width		580 mm
Depth		952 mm
Construction mat. (casing and manifolds) and net weight		
POLYPROPYLENE (with glass additive)		55 Kg
		Temp. 3°C min.
		65°C max

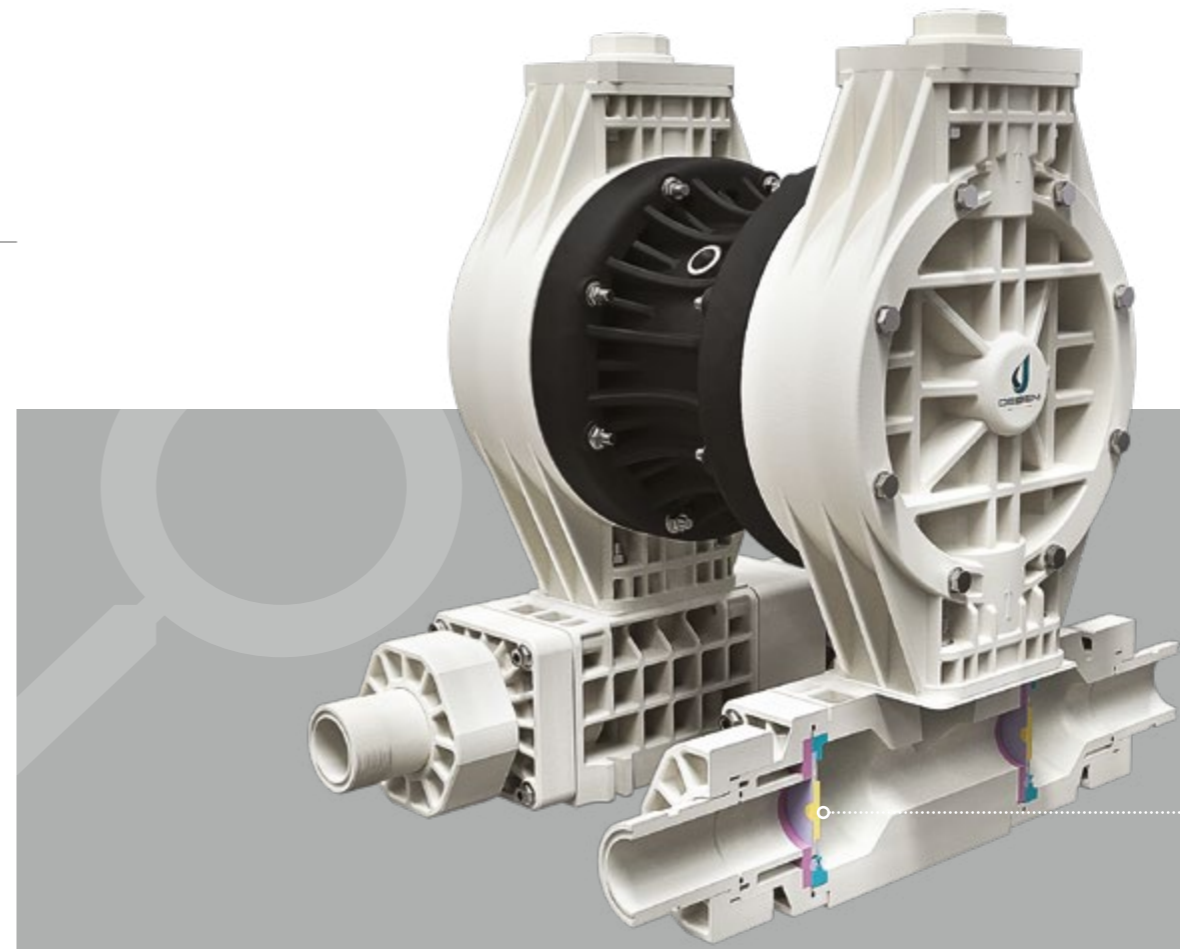

A = Plate
B = Flap seat
C = Flap Wear Ring

MAIN APPLICATION SECTORS

- PACKING, GLUE, PAPER AND PAPER MILLS
- WATER AND SLUDGE TREATMENT
- CHEMICAL INDUSTRY
- CERAMIC, STONE, MARBLE, GLASS AND MINING INDUSTRY
- GALVANIC AND ELECTRONIC INDUSTRY

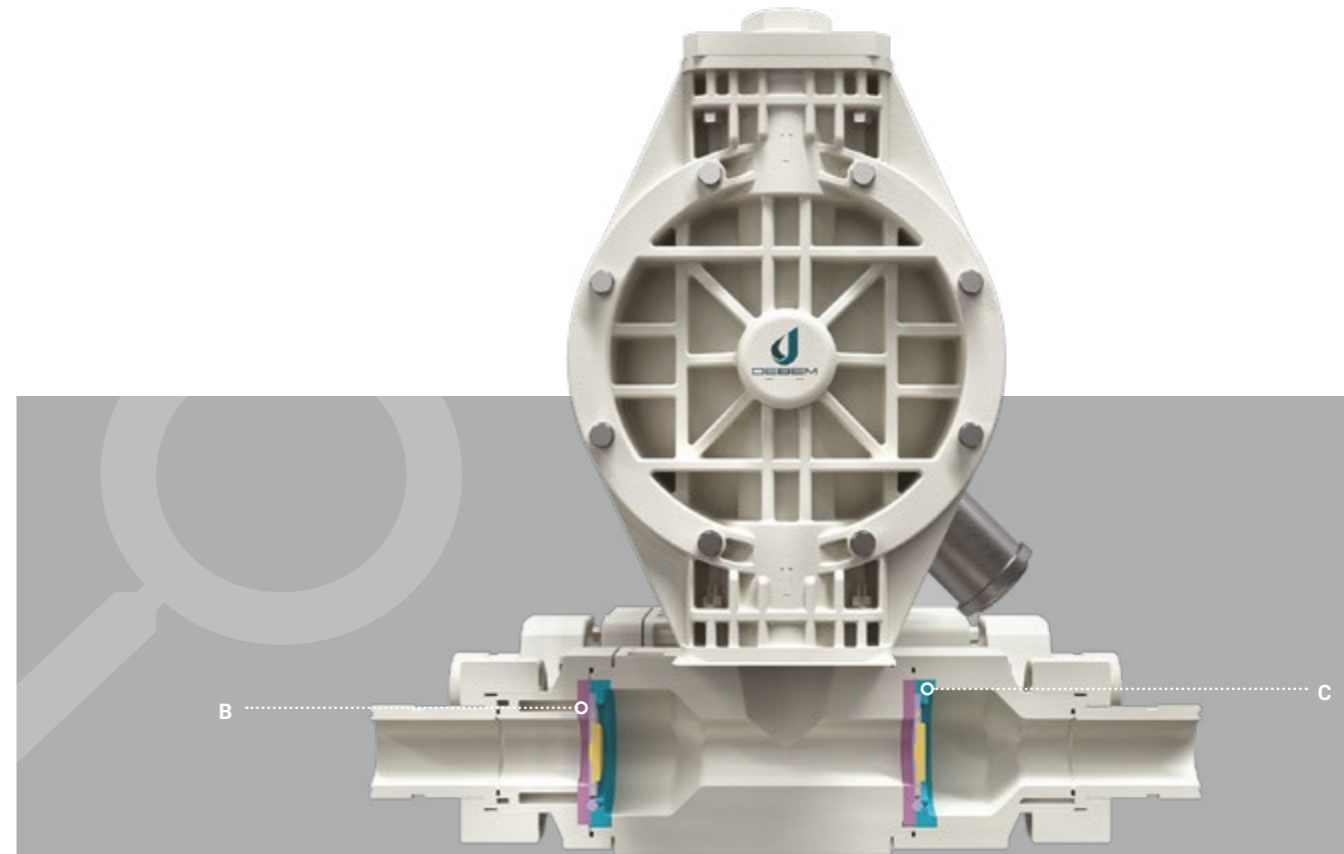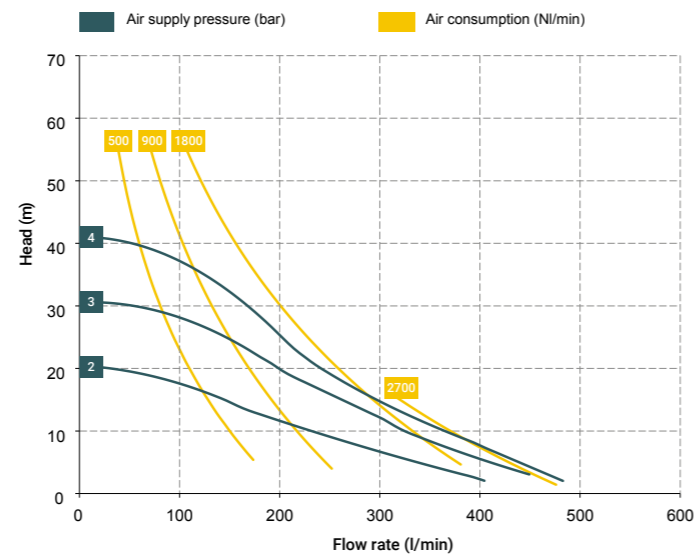

Chemical compatibility

The type of fluid, the temperature and the operating environment are the factors that influence the selection of the pump materials and its correct chemical compatibility.

The table below is included by way of example. For more information don't hesitate to contact the Debem technical support. We have collected the information from reliable sources.

Debem, not having carried any verification of the data, cannot be held responsible for the correctness of the information. The table refers to pure polypropylene and PVDF, our plastics have glass and carbon fillers that may affect the chemical compatibility of the pump. The user, with their in-depth knowledge

of their product, can make the most accurate decision regarding the chemical compatibility.

WARNING

The information in this table has been supplied to Debem from other reliable sources and must be used exclusively as a guide in selecting the materials for the pump parts in contact with the fluid, such as: Pump casing and manifolds, diaphragms, balls, ball seats and o-rings.

The assessment of the chemical reaction listed in this table refers to an exposure period of 48 hours. Debem has no knowledge of the possible effects after this period. Debem does not guarantee (neither expressly nor implicitly) that

the information contained in this table is accurate or complete or that any material is suitable for any use.

DANGER

Changes in the chemical behaviour during handling, due to factors such as temperature, pressure and concentrations, could trigger issues in the pump.

Use adequate protections and/or personal protection equipment when installing the pump in the circuit or when performing maintenance on the pump. Read the use and maintenance manual before any operation on the pump.

SUBSTANCE	Polypropylene	PVDF (Halair®)	Aluminium	Stainless steel AISI 316	NBR (Perbunan®)	EPDM (Dutral®)	PTFE (Teflon®)	PPS-V (Ryton®)	FPM (Vitron®)	Santoprene®	PE-UHMW (Polizene®)
ACETALDEIDE	A1	D	B	A	D	A	A	A	D	-	B
ACETAMIDE	A1	C	A	A	A	A	A	A	B	-	-
VINYL ACETATE	B1	A2	A1	B	D	B2	A2	-	A1	-	D
ACETYLENE	A1	A	A	A	B	A	A	A	A	-	-
VINEGAR	A	B	D	A	B	A	A	A	A	-	A
ACETONE	A	D	A	A	D	A	A	A	D	A1	A2
FATTY ACIDS	A	A	A	A	B	D	A	-	A	D	A


A = Excellent
 B = Good
 C = Poor (not recommended)
 D = Serious attack (not recommended)

- = Information not available
 1 = Satisfactory up to 22°C (72°F)
 2 = Satisfactory up to 48°C (120°F)




For more information don't hesitate to contact the Debem technical support. We have collected the information from reliable sources. Debem, not having carried any verification of the data, cannot be held responsible for the correctness of the information

Online configurator

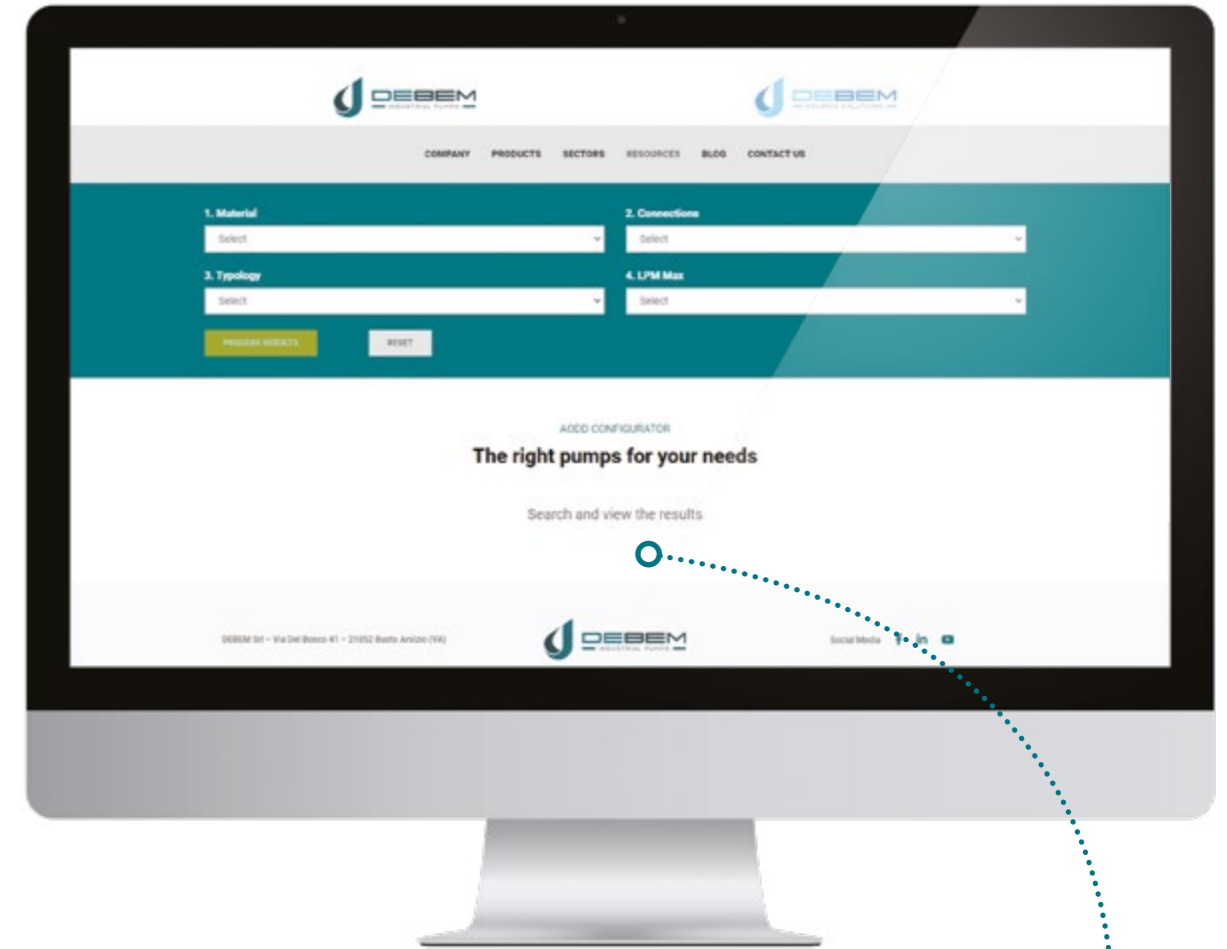

Configure your Debem industrial pump with a few simple clicks adapted to your needs

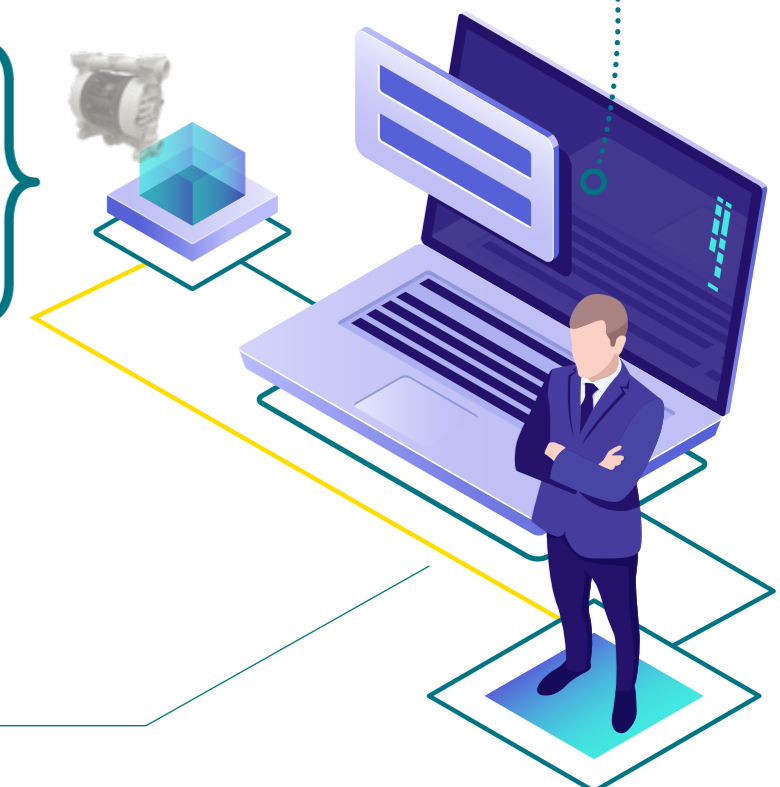


Go to www.debem.com and in the CONFIGURE section you will find the pumps configurator, which will help you in choosing the most suitable solution from the various products available.

www.debem.com

Technical data


Example illustrating the graphic reading of the performance

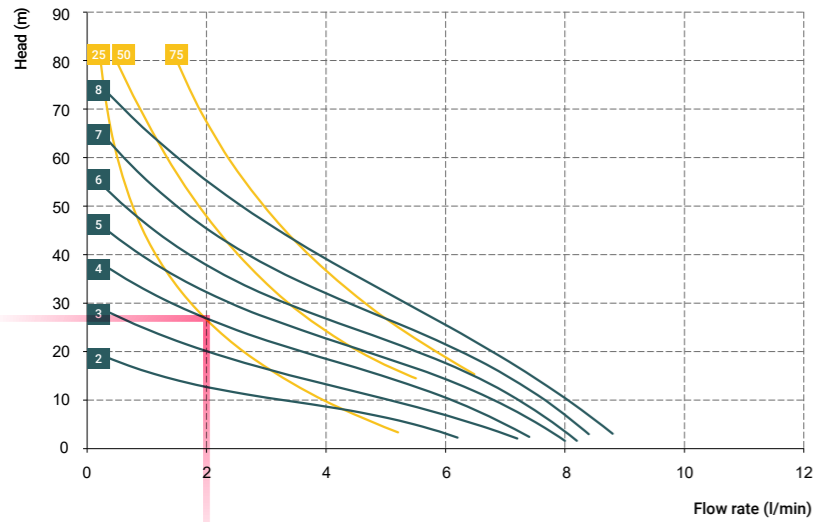

- air supply pressure
- air consumption (NI/min)
- example:
 - Flow rate 2 l/min
 - Head 27 mt/ac
 - Supply pressure 4 bar
 - Air consumption 25 NI/min


Decrease in the flow rate relating to the viscosity

Available flow rate

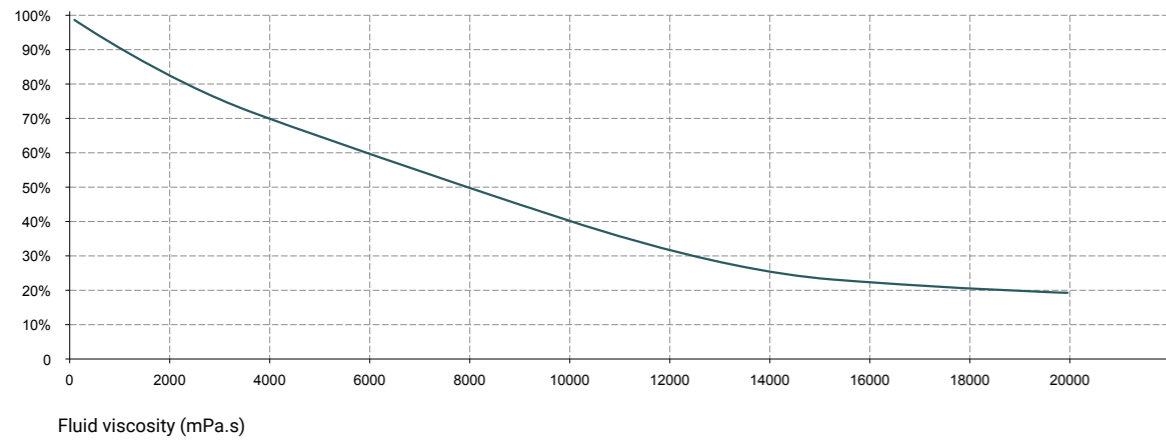

Boxer pumps - loss of flow capacity on the suction height

Flow loss

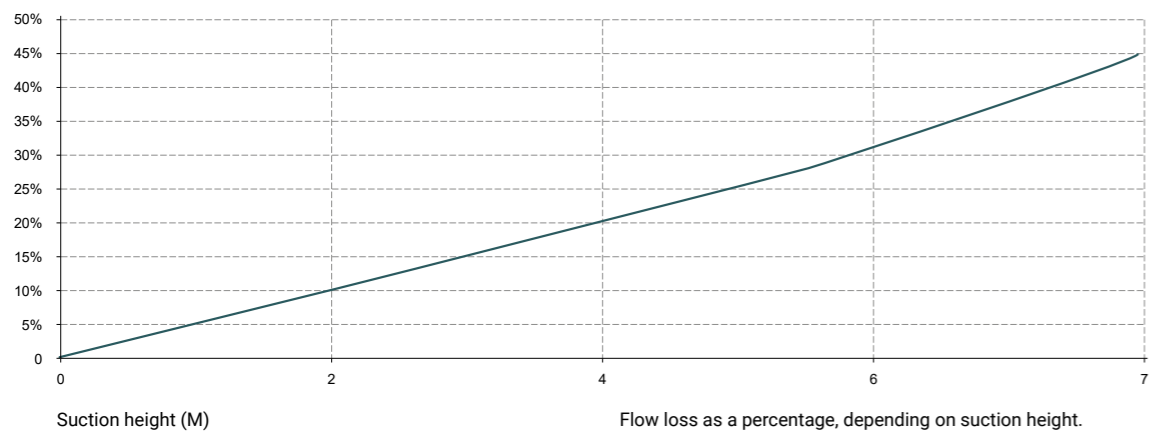

COMPRESSOR TABLE

Air consumption	Approximate power compressor
NI/min	HP
50	0.5
100	1
200	2
250	2.5
350	3.5
450	4.5
550	5.5
850	8.5
1000	10
1500	15
2000	20
3500	30
4000	40

CYLINDER CAPACITY TABLE

Pump type	Displacement
BOXER 7	3.2 cc
BOXER 15	10.3 cc
MICROBOXER	30 cc
BOXER 50 / MINIBOXER	67 cc
BOXER 81 / BOXER 90	100 cc
BOXER 100	222 cc
BOXER 150	340 cc
BOXER 251 / BOXER 252	552 cc
BOXER 522 / BOXER 502	1,825 cc
BOXER 503	1,825 cc
BOXER FPC	250 cc
BOXER 35	30 cc
SMIDGETBOX	3.2 cc
SCUBIC 15	10.3 cc
SBOXER 7	3.2 cc
SBOXER 15	10.3 cc
SMICROBOXER	30 cc
SBOXER 50 / SMINIBOXER	67 cc
SBOXER 81 / SBOXER 90	100 cc
SBOXER 100	222 cc

The power effectively absorbed by the compressor is about =70% of the value indicated in the table. We recommend using a compressor with a tank.

Warning: when operating with an OPEN OUTLET, the actual flow rate is much higher than the ratio between number of cycles measured and displacement, due to the quantity of movement.

Equaflux

The Equaflux dampers are used with fluids with a high apparent viscosity, also with large suspended solids. They adapt automatically to the system conditions, without any manual adjustments or calibrations. The high capacity of minimising pulsations, vibrations and water hammer renders this component ideal for protecting the system, providing a regular outlet flow. The vast range of construction materials allows us to select the best chemical compatibility with the fluid and/or the environment, without neglecting the cor-

rect temperature range. The dampers are also available for use in potentially explosive atmospheres (ATEX certification).

The Equaflux is operated by the same compressed air that drives the pump. The compressed air, introduced in the counter-pressure chamber (behind the diaphragm), creates a self-adjusting pneumatic damping cushion based on the pressure exerted by the pump.

- Product designed and constructed in Italy
- Works with non-lubricated air
- High output and sturdiness
- Suitable for minimising flow pulsations
- Suitable for minimising vibrations during the operation of the pump

EQUAFLUX DAMPERS CODES ENCODING


ex. EQ100PCHTC
Equaflux 100 PP+CF, Hytrel®, air side diaphragm, PTFE product side diaphragm, conduct.

EQ100	PC	H	T	C
DAMPER MODEL	DAMPER CASING	C MEMBRANE AIR SIDE PUMP CASING	MEMBRANE PRODUCT SIDE	VERSION CONDUCT
EQ 051 - Equaflux 51 EQ 100 - Equaflux 100 EQ 200 - Equaflux 200 EQ 302 - Equaflux 302 EQ 303 - Equaflux 303	P - Polypropylene PC - PP + CF FC - PVDF+CF R - PPS A - AISI 316 (excluding EQ 303) AL - Aluminium	H - Hytrel® M - Santoprene® D - EPDM N - NBR	T - PTFE	C* Z*

*C = CONDUCT version for ATEX Zone 1
*Z = Version for IECEx standard



A = expansion chamber
B1 = air-side diaphragm
B2 = fluid-side diaphragm
C = automatic pneumatic valve
D = pneumatic chamber

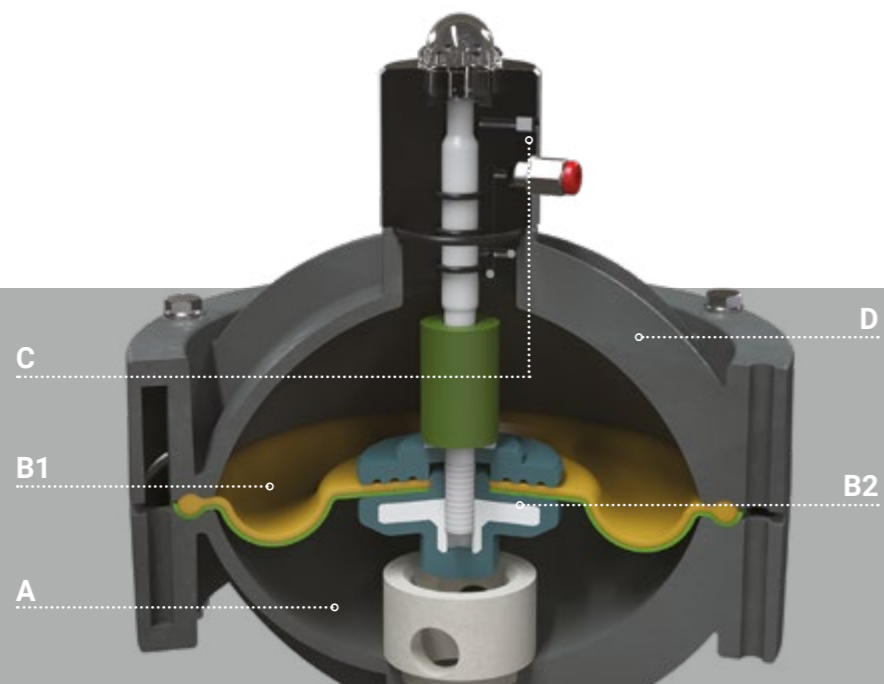

Equaflux 51

Specifications and types

Zone 2 - Zone 22 II 3G Ex h IIB T4 Gc and II 3D Ex h IIB T135°C Dc X
Zone 1 - Zone 21 II 2G Ex h IIB T4 Gb and II 2D Ex h IIB T135°C Db X



PLASTIC MATERIAL PP

PLASTIC MATERIAL PPS

PLASTIC MATERIAL PVDF

PP - ALU Equaflux 51

Dimensions	
Height	117 mm
Diameter Ø	121 mm
Width	117 mm

AISI Equaflux 51

Dimensions	
Height	133 mm
Diameter Ø	120 mm
Width	117 mm

Air side half-casing material

- PP
- PP+CF
- Aluminium

Diaphragm materials


- NBR
- EPDM
- Hytrel®
- Santoprene®
- PTFE

Caps materials

- Polypropylene (with glass additive)
- Conductive polypropylene (with carbon additive)
- PVDF
- PPS
- AISI 316 L

Packaging

Cardboard box

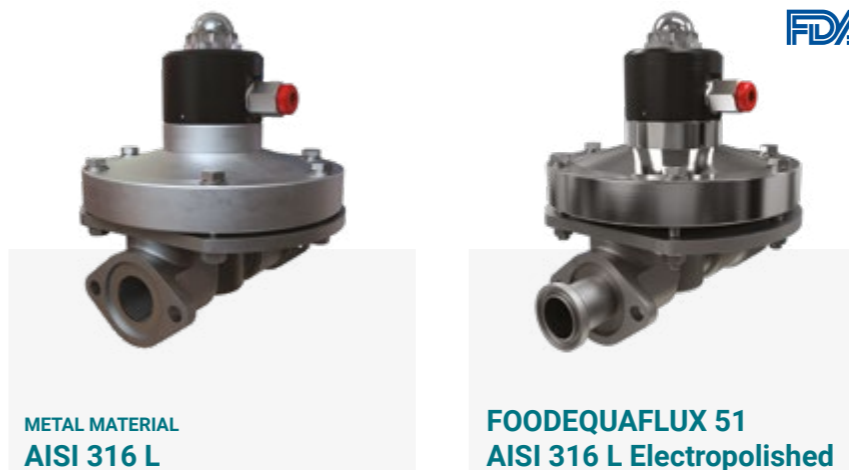

METAL MATERIAL AISI 316 L

FOODEQUAFLUX 51 AISI 316 L Electropolished



Product Fitting	Air Attachment	Operating Pressure	Applicability	Material* (half-casing in contact with the fluid)	Weight	Operating temperature	Dim. (mm)
G 3/4"	Ø 6 mm	Min 2 Bar - Max 8 Bar	Sidgetbox, Cubic15, Boxer7, Boxer15, Microboxer, Boxer35	Polypropylene	0.5 Kg	+3°C to +65°C	117x121x117
G 3/4"	Ø 6 mm	Min 2 Bar - Max 8 Bar	Midgetbox, Cubic15, Boxer7, Boxer15, Microboxer, Boxer35	PP + CF	0.5 Kg	+3°C to +65°C	117x121x117
G 3/4"	Ø 6 mm	Min 2 Bar - Max 8 Bar	Cubic15, Boxer7, Boxer15, Microboxer, Boxer35	PVDF	0.5 Kg	+3°C to +95°C	117x121x117
G 3/4"	Ø 6 mm	Min 2 Bar - Max 8 Bar	Boxer7, Boxer15, Microboxer, Boxer35	PPS	0.6 Kg	+3°C to +95°C	117x121x117
G 1/2"	Ø 6 mm	Min 2 Bar - Max 8 Bar	Boxer7, Boxer15, Microboxer, Boxer35	AISI 316 L	1.33 Kg	+3°C to +95°C	117x120x133
clamp*	Ø 6 mm	Min 2 Bar - Max 8 Bar	Foodboxer15, Foodboxer30	AISI316 L Electropolished	1.33 Kg	+3°C to +95°C	*

*Dimensions variable, please contact our technical sales department

Equaflux 100

Specifications and types

Zone 2 - Zone 22 II 3G Ex h IIB T4 Gc and II 3D Ex h IIIB T135°C Dc X
 Zone 1 - Zone 21 II 2G Ex h IIB T4 Gb and II 2D Ex h IIIB T135°C Db X



PP - PPS Equaflux 100

Dimensions	
Height	177 mm
Diameter Ø	169 mm
Width	169 mm

AISI Equaflux 100

Dimensions	
Height	183 mm
Diameter Ø	170 mm
Width	170 mm

Air side half-casing material

- PP
- PP+CF

Diaphragm materials

- NBR
- EPDM
- Hytrel®
- Santoprene®
- PTFE

Caps materials

- Polypropylene (with glass additive)
- Conductive polypropylene (with carbon additive)
- PVDF
- PPS
- Natural ECTFE
- AISI 316 L

Packaging

Cardboard box



METAL MATERIAL
AISI 316



FOODEQUAFLUX 100
AISI 316 Electropolished



Product Fitting	Air Attachment	Operating Pressure	Applicability	Material* (half-casing in contact with the fluid)	Weight	Operating temperature	Dim. (mm)
G 1"	Ø 6 mm	Min 2 Bar - Max 8 Bar	Boxer50, Boxer81	Polypropylene	1.5 Kg	+3°C to +65°C	169x169x177
G 1"	Ø 6 mm	Min 2 Bar - Max 8 Bar	Boxer50, Boxer81	PP+CF	1.5 Kg	+3°C to +65°C	169x169x177
G 1"	Ø 6 mm	Min 2 Bar - Max 8 Bar	Boxer50, Boxer81	PVDF	1.7 Kg	+3°C to +95°C	169x169x177
G 1"	Ø 6 mm	Min 2 Bar - Max 8 Bar	Boxer50, Boxer90	PPS	1.7 Kg	+3°C to +95°C	169x169x177
G 1"	Ø 6 mm	Min 2 Bar - Max 8 Bar	FPC 100, Miniboxer, Boxer 50, Boxer 81/90	PTFE	1.7 Kg	+3°C to +65°C	169x169x177
G 1"	Ø 6 mm	Min 2 Bar - Max 8 Bar	Miniboxer, Boxer81	AISI 316	2.56 Kg	+3°C to +95°C	170x170x183
clamp*	Ø 6 mm	Min 2 Bar - Max 8 Bar	Foodboxer50, Foodboxer81	AISI 316 Electropolished	2.56 Kg	+3°C to +95°C	*

*Dimensions variable, please contact our technical sales department

Equaflux 200

Specifications and types

Zone 2 - Zone 22 II 3G Ex h IIB T4 Gc and II 3D Ex h IIIB T135°C Dc X
 Zone 1 - Zone 21 II 2G Ex h IIB T4 Gb and II 2D Ex h IIIB T135°C Db X



PP - PPS Equaflux 200

Dimensions	
Height	284 mm
Diameter Ø	254 mm
Width	254 mm

AISI Equaflux 200

Dimensions	
Height	254 mm
Diameter Ø	260 mm
Width	265 mm

Air side half-casing material

- PP
- PP+CF

Diaphragm materials

- NBR
- EPDM
- Hytrel®
- Santoprene®
- PTFE

Caps materials

- Polypropylene (with glass additive)
- Conductive polypropylene (with carbon additive)
- PVDF
- Aluminium
- AISI 316 L

Packaging

Cardboard box



METAL MATERIAL
AISI 316



FOODEQUAFLUX 200
AISI 316 Electropolished



Product Fitting	Air Attachment	Operating Pressure	Applicability	Material* (half-casing in contact with the fluid)	Weight	Operating temperature	Dim. (mm)
G1 1/2	Ø 6 mm	Min 2 Bar - Max 8 Bar	Boxer100, Boxer150, Boxer251	Polypropylene	3.8 Kg	+3°C to +65°C	254x254x284
G 1 1/2	Ø 6 mm	Min 2 Bar - Max 8 Bar	Boxer100, Boxer150, Boxer251	PP + CF	3.8 Kg	+3°C to +65°C	254x254x284
G 1 1/2	Ø 6 mm	Min 2 Bar - Max 8 Bar	Boxer100, Boxer150, Boxer251	PVDF	4.5 Kg	+3°C to +95°C	254x254x284
G 1 1/2	Ø 6 mm	Min 2 Bar - Max 8 Bar	Boxer100, Boxer150, Boxer251	PPS	4.5 Kg	+3°C to +95°C	254x254x284
G 1 1/2	Ø 6 mm	Min 2 Bar - Max 8 Bar	Boxer100, Boxer150, Boxer252	AISI 316	7.45 Kg	+3°C to +95°C	254x260x265
clamp*	Ø 6 mm	Min 2 Bar - Max 8 Bar	Foodboxer100, Foodboxer150, Foodboxer252	AISI 316 Electropolished	7.45 Kg	+3°C to +95°C	*

*Dimensions variable, please contact our technical sales department

Equaflux 302

Specifications and types

Zone 2 - Zone 22 II 3G Ex h IIB T4 Gc and II 3D Ex h IIB T135°C Dc X
 Zone 1 - Zone 21 II 2G Ex h IIB T4 Gb and II 2D Ex h IIB T135°C Db X



PP Equaflux 302

Dimensions	
Height	398 mm
Diameter Ø	516 mm
Width	350 mm

AISI Equaflux 302

Dimensions	
Height	355 mm
Diameter Ø	352 mm
Width	350 mm

ALU Equaflux 302

Dimensions	
Height	366 mm
Base	467 mm
Width	350 mm

Air side half-casing material

- PP
- PP+CF

Diaphragm materials

- NBR
- EPDM
- Hytrel®
- Santoprene®
- PTFE

Caps materials

- Polypropylene (with glass additive)
- Conductive polypropylene (with carbon additive)
- PVDF
- Aluminium
- AISI 316

Packaging

Wooden case



METAL MATERIAL
AISI 316



FOODEQUAFLUX 302
AISI 316 Electropolished

Product Fitting	Air Attachment	Operating Pressure	Applicability	Material* (half-casing in contact with the fluid)	Weight	Operating temperature	Dim. (mm)
G 2"	Ø 8 mm	Min 2 Bar - Max 8 Bar	Boxer522	Polypropylene	23 Kg	+3°C to +65°C	350x516x398
G 2"	Ø 8 mm	Min 2 Bar - Max 8 Bar	Boxer522	PP + CF	23 Kg	+3°C to +65°C	350x516x398
G 2"	Ø 8 mm	Min 2 Bar - Max 8 Bar	Boxer522	PVDF	28.5 Kg	+3°C to +95°C	350x516x398
G 2"	Ø 8 mm	Min 2 Bar - Max 8 Bar	Boxer502	ALU	26 Kg	+3°C to +95°C	350x467x366
G 2"	Ø 8 mm	Min 2 Bar - Max 8 Bar	Boxer502	AISI 316	32 Kg	+3°C to +95°C	350x352x355
clamp*	Ø 8 mm	Min 2 Bar - Max 8 Bar	Foodboxer502	AISI 316 Electropolished	32 Kg	+3°C to +95°C	*

*Dimensions variable, please contact our technical sales department

Equaflux 303

Specifications and types

Zone 2 - Zone 22 II 3G Ex h IIB T4 Gc and II 3D Ex h IIB T135°C Dc X
 Zone 1 - Zone 21 II 2G Ex h IIB T4 Gb and II 2D Ex h IIB T135°C Db X



PP Equaflux 303

Dimensions	
Height	398 mm
Diameter Ø	516 mm
Width	350 mm

ALU Equaflux 303

Dimensions	
Height	419 mm
Diameter Ø	509 mm
Width	350 mm

Air side half-casing material

- PP
- PP+CF

Diaphragm materials

- NBR
- EPDM
- Hytrel®
- Santoprene®
- PTFE

Caps materials

- Polypropylene (with glass additive)
- Conductive polypropylene (with carbon additive)
- PVDF
- Aluminium

Packaging


Wooden case



METAL MATERIAL
ALU

Product Fitting	Air Attachment	Operating Pressure	Applicability	Material* (half-casing in contact with the fluid)	Weight	Operating temperature	Dim. (mm)
G 3"	Ø 8 mm	Min 2 Bar - Max 8 Bar	Boxer503	Polypropylene	23 Kg	+3°C to +65°C	350x516x398
G 3"	Ø 8 mm	Min 2 Bar - Max 8 Bar	Boxer503	PP + CF	23 Kg	+3°C to +65°C	350x516x398
G 3"	Ø 8 mm	Min 2 Bar - Max 8 Bar	Boxer503	PVDF	28.5 Kg	+3°C to +95°C	350x516x398
G 3"	Ø 8 mm	Min 2 Bar - Max 8 Bar	Boxer503	ALU	29 Kg	+3°C to +95°C	350x509x419

*Material on request: DUPLEX/S.DUPLEX

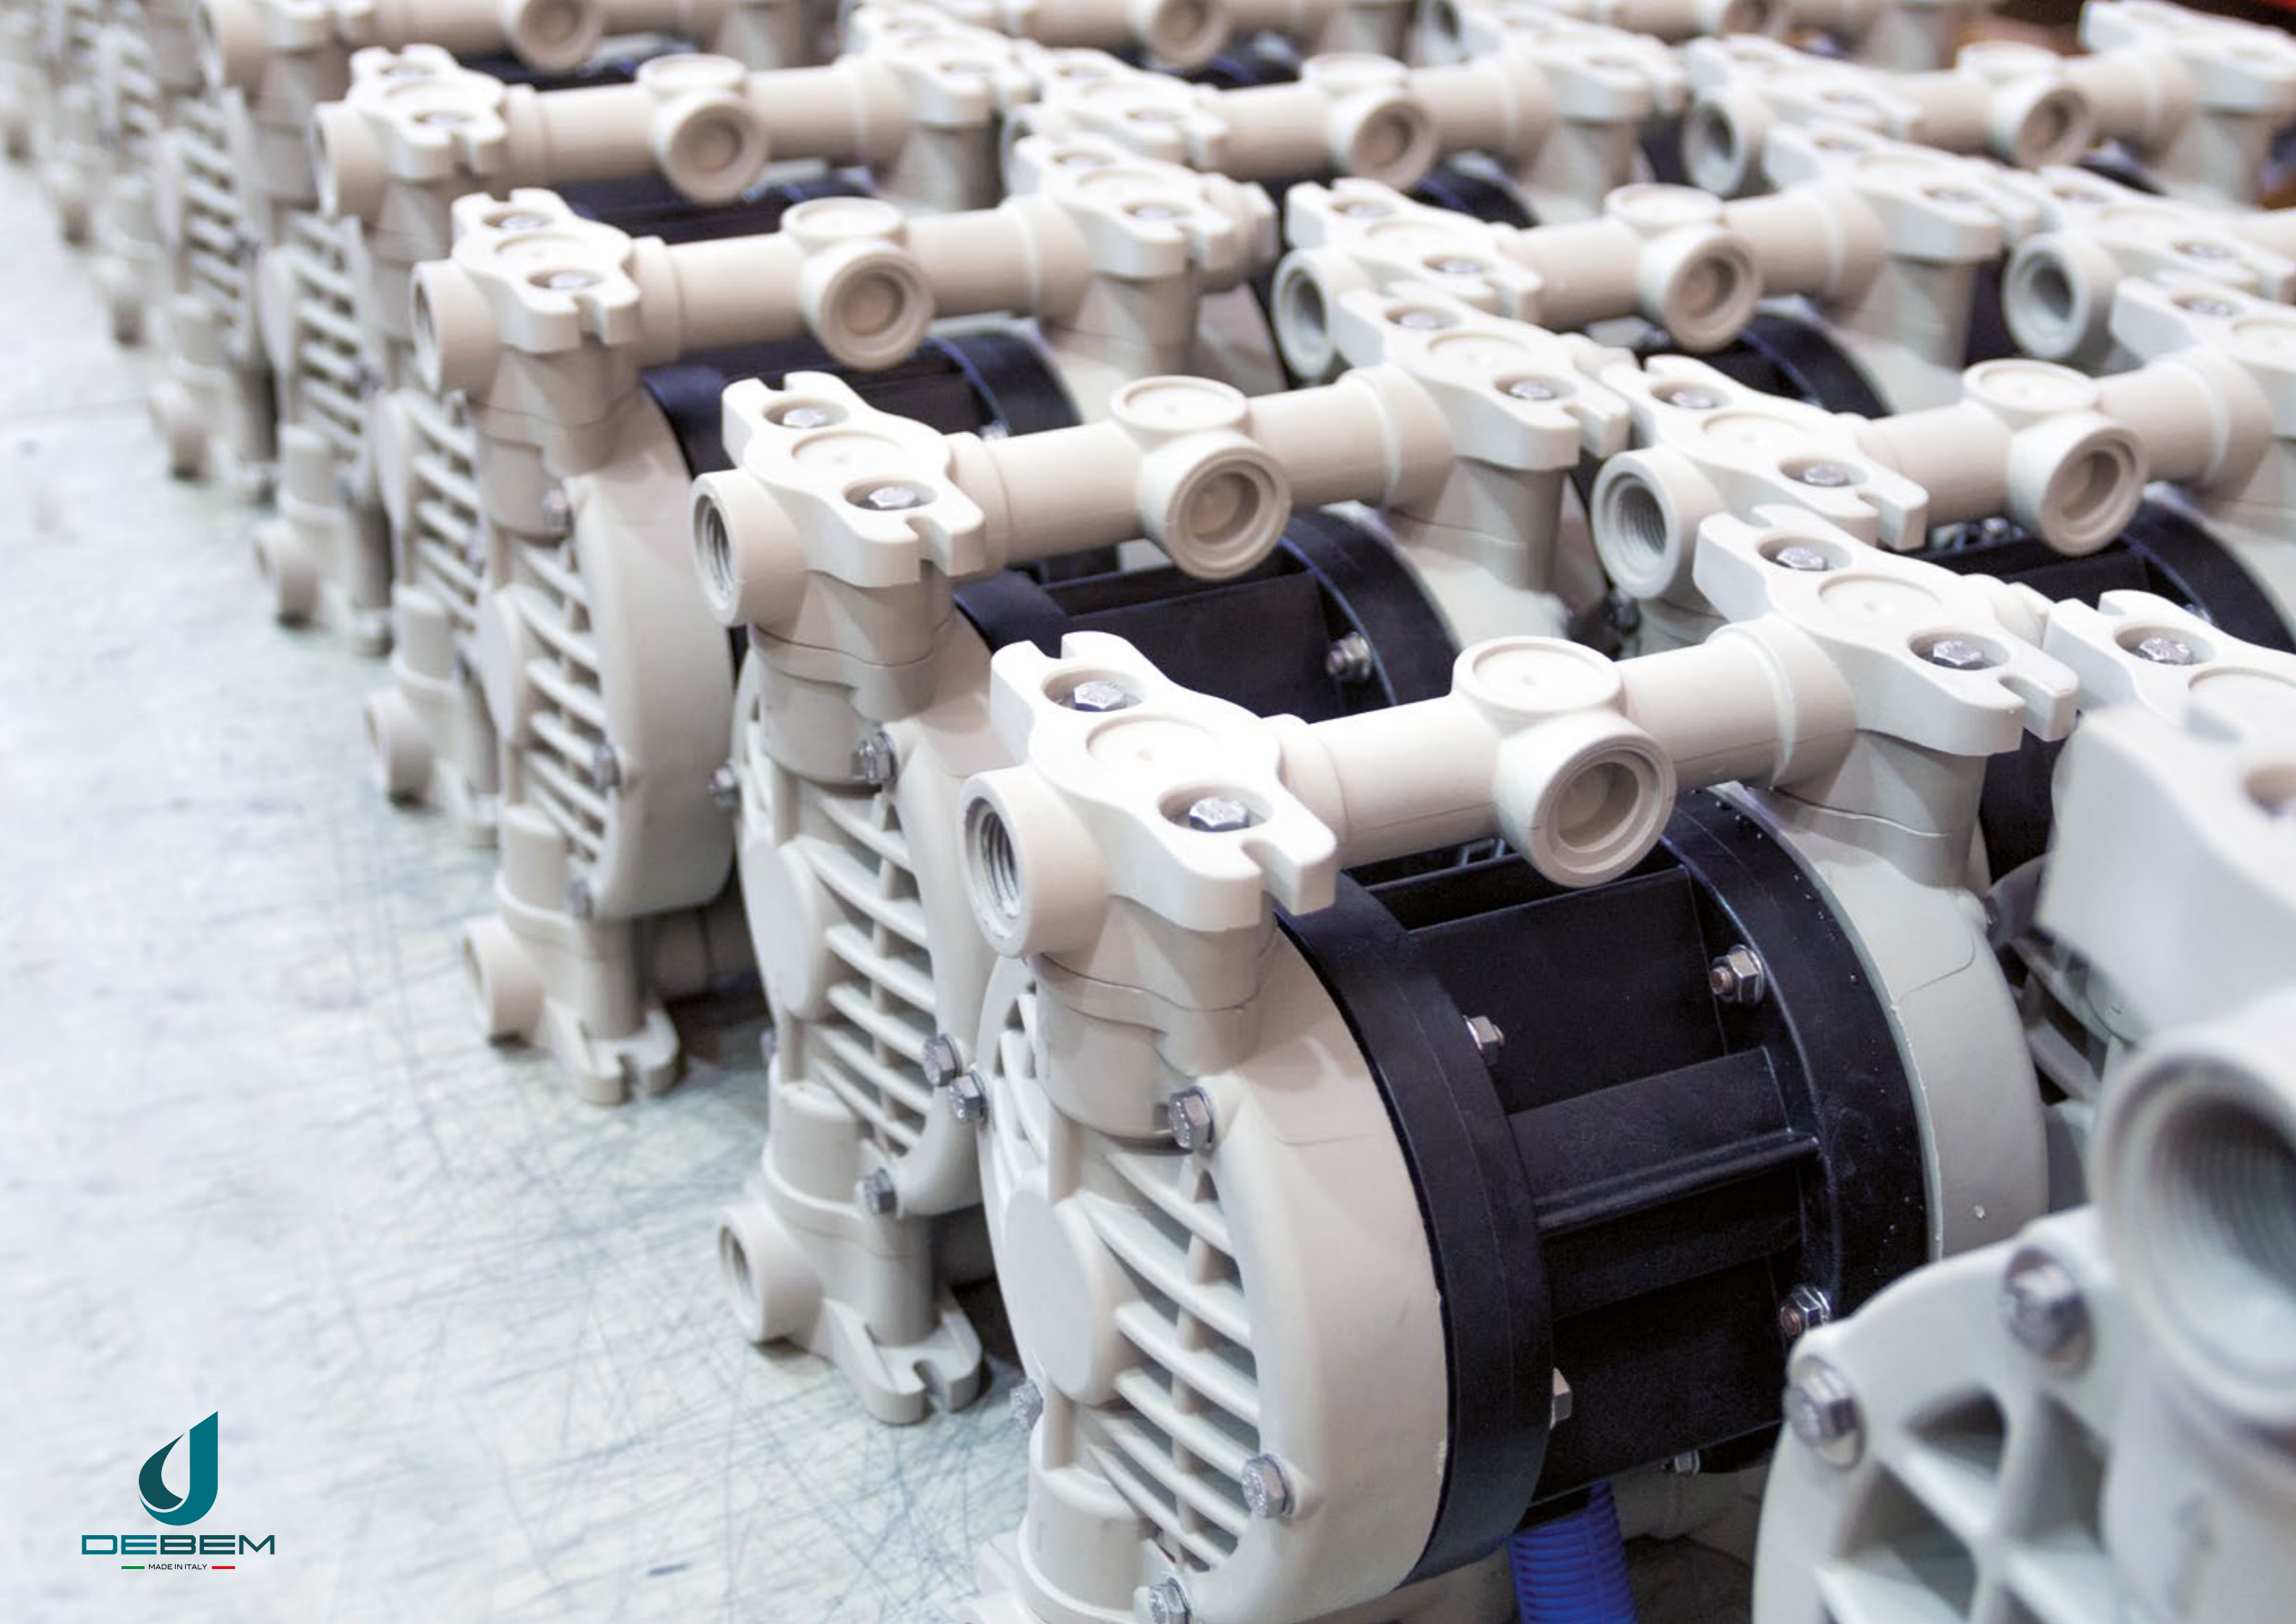

DM

Debem's magnetic drive centrifugal pumps are the ideal solution for numerous applications: laboratory machines, medical equipment, photographic developing machines, X-ray processes, silver recovery systems, graphics industry, heat exchangers, aquariums, water treatment, filtering systems, galvanic and chemical industry and the transfer of acids and corrosive fluids.

The DM pumps must be installed exclusively with the axis horizontal under head. In order to avoid dry running, vortex formation and possible air intake, appropriate devices must be provided. The DM pumps must operate exclusively with the overflow pump. The outer magnet is positioned on the motor shaft and transmits the motion to the inner magnet integrated with the hermetically sealed impeller. The pump impeller is

not physically fixed to the motor shaft, thereby eliminating the need for seals and consequently any leaks of the liquid being pumped due to wear. The pump unit is constructed with a low number of components, making it extremely easy to maintain. The materials used as standard are polypropylene (PP) and polyvinylidene fluoride (PVDF). The pumps cannot operate dry. Dirty liquids can reduce their life.




- Product designed and constructed in Italy
- Constructed in polypropylene or PVDF
- Below head use
- Extremely easy maintenance
- Suitable for continuous use

DM PUMPS CODES ENCODING

ex. DM10P-SD1BE071
DM10 PP, standard thrust bearing, EPDM o-ring, Ø 98 mm impeller, BSPP fitting, MEC motor flange, 071 casing.

DM10	P	S	D	1	B	E	071	T
PUMP MODEL	PUMP CASING	THRUST BEARING	O-RING	IMPELLER	FLANGE	ATTACHMENT MOTOR	BOX	MOTOR
DM06 DM10 DM15 DM30	P - Polypropylene FC - PVDF+CF	S - Standard (ceramic + PTFE Graphite)	D - EPDM V - Viton®	DM06 1=Ø 81 mm 2=Ø 70 mm 3=Ø 65 mm DM10 1=Ø 98 mm 2=Ø 85 mm 3=Ø 70 mm DM15 1=Ø 123 mm 2=Ø 108 mm 3=Ø 90 mm DM30 1=Ø 134 mm 2=Ø 122 mm 3=Ø 110 mm	N - NPT B - BSPP	E - MEC U - NEMA*	DM06 063 071 DM10 071 080 DM15 090 DM30 090 100 112	M - Single-phase** T - Three-phase A - Atex** S - Without Motor

* Only the pump can be supplied, with American flange, for coupling with NEMA motor
**On request

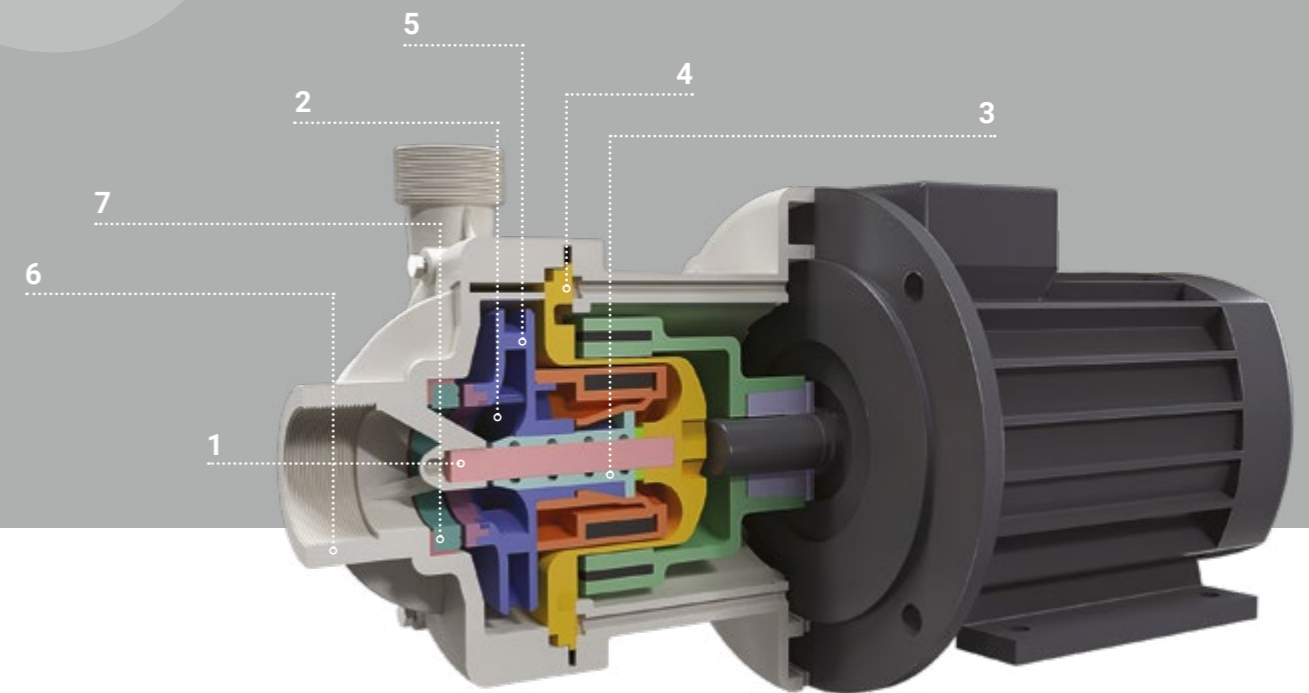

COMPONENTS	MATERIALS
1 Shaft	Alumina ceramic 99.7%
2 Impeller thrust bearing	PTFE + 30% Graphite
3 Bushing	PTFE + 30% Graphite
4 O-Ring	Viton®/EPDM
5 Impeller	PP/PVDF+CF
6 Pump body	PP/PVDF+CF
7 Head thrust bearing	Alumina ceramic 99.7%



MAIN APPLICATION SECTORS

AUTOMOTIVE

WATER AND SLUDGE TREATMENT

CHEMICAL INDUSTRY

GALVANIC AND ELECTRONIC INDUSTRY

DM 06

Specifications and types

Suction fittings	1" f BSPP or DN 25 - NPT
Delivery fittings	3/4" m BSPP or DN 20 - NPT
Max. flow rate	7 m3/h
Min. flow rate	0.75 m3/h
Max. head	8.5 m
Viscosity up to	150 cps

STANDARD ELECTRIC MOTOR:

Kw 0.25 HP 0.35

- Constructive Form B3+B5
- RPM 2900
- **Three-phase 230/400 V**
- 50/60 HZ
- 2 Poles IE2 Protection IP55
- Ambient temperature -30°C + 45°C

Kw 0.37 HP 0.5

- Constructive Form B3+B5
- RPM 2900
- **Three-phase 230/400 V**
- 50/60 HZ
- 2 Poles IE2 Protection IP55
- Ambient temperature -30°C + 45°C

Kw 0.25 HP 0.35

- Constructive Form B3+B5
- RPM 2900
- **Single-phase**
- Ambient temperature -30°C + 45°C

Kw 0.37 HP 0.5

- Constructive Form B3+B5
- RPM 2900
- **Single-phase**
- Ambient temperature -30°C + 45°C

ELECTRIC MOTORS AVAILABLE ON REQUEST:

- Single-phase (up to 3 kw)
- ATEX
- NEMA 56C*

* (only pump available, with American flange, for coupling with NEMA motor - the motor is not available in our standard)

IMPELLER Motor 0.25 Kw (0.35 HP) Motor 0.37 Kw (0.5 HP)

Ø 81 mm	up to 1.2 g/cm3	up to 1.8 g/cm3
(Standard)		
Ø 70 mm	up to 1.5 g/cm3	up to 2 g/cm3
Ø 65 mm	up to 1.8 g/cm3	up to 2 g/cm3

OPERATING TEMPERATURES** AND WEIGHTS

PP (with glass additive)	da 0°C a + 70°C, 2,2 Kg*
PVDF (with carbon additive)	da -10°C a + 100°C, 2,5 Kg*


*The weights refer to the pump without the motor
 **Measurements should be taken with agitated water; temperatures may vary depending on the conditions of the system and/or the processed liquid



PLASTIC MATERIAL
PP



PLASTIC MATERIAL
PVDF

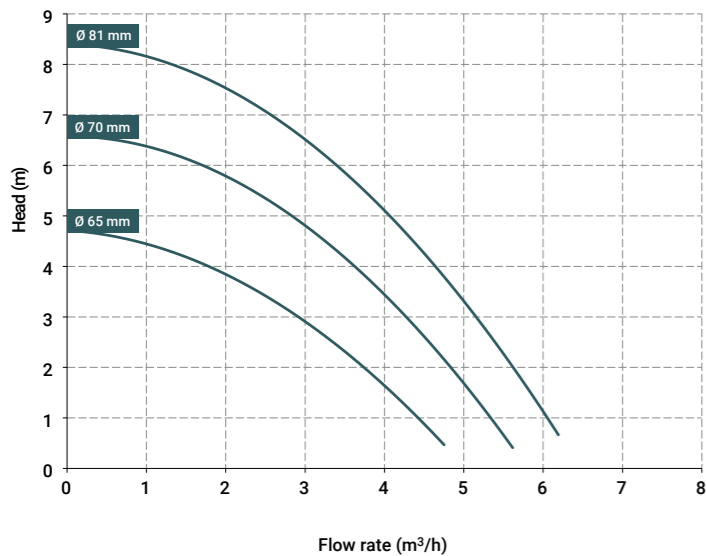

DM 10

Specifications and types

Suction fittings	1 1/2" f BSPP or DN 40 - NPT
Delivery fittings	1" m BSPP or DN 25 - NPT
Max. flow rate	13 m3/h
Min. flow rate	1.2 m3/h
Max. head	14 m
Viscosity up to	150 cps

STANDARD ELECTRIC MOTOR:

Kw 0.55 HP 0.75

- Constructive Form B3+B5
- RPM 2900
- **Three-phase 230/400 V - 50/60 HZ**
- 2 Poles IE2 Protection IP55
- Ambient temperature -30°C + 45°C

Kw 0.75 HP 1

- Constructive Form B3+B5
- RPM 2900
- **Three-phase 230/400 V - 50/60 HZ**
- 2 Poles IE3 Protection IP55
- Ambient temperature -30°C + 45°C

Kw 0.55 HP 0.75

- Constructive Form B3+B5
- RPM 2900
- **Single-phase**
- Ambient temperature -30°C + 45°C

Kw 0.75 HP 1

- Constructive Form B3+B5
- RPM 2900
- **Single-phase**
- Ambient temperature -30°C + 45°C

ELECTRIC MOTORS AVAILABLE ON REQUEST:

- Single-phase (up to 3 kw)
- ATEX
- NEMA 56C* / 143TC*

* (only pump available, with American flange, for coupling with NEMA motor - the motor is not available in our standard)

IMPELLER Motor 0.55 Kw (3 HP) Motor 0.75 Kw (4 HP)

Ø 98 mm	up to 1.1 g/cm3	up to 1.5 g/cm3
(Standard)		
Ø 85 mm	up to 1.6 g/cm3	up to 2 g/cm3
Ø 70 mm	up to 2 g/cm3	up to 2 g/cm3

OPERATING TEMPERATURES** AND WEIGHTS

PP (with glass additive)	da 0°C a + 70°C, 2,2 Kg*
PVDF (with carbon additive)	da -10°C a + 100°C, 2,5 Kg*


*The weights refer to the pump without the motor
 **Measurements should be taken with agitated water; temperatures may vary depending on the conditions of the system and/or the processed liquid



PLASTIC MATERIAL
PP



PLASTIC MATERIAL
PVDF

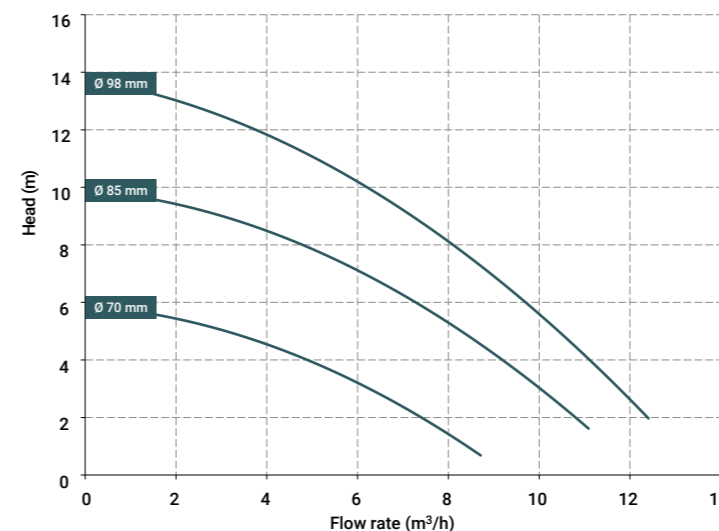

DM 15

Specifications and types

Suction fittings	1"1/2 f BSPP or DN 40 - NPT
Delivery fittings	1"1/4 m BSPP or DN 32 - NPT
Max. flow rate	23.5 m ³ /h
Min. flow rate	2 m ³ /h
Max. head	20 m
Viscosity up to	150 cps

STANDARD ELECTRIC MOTOR:

Kw 1.5 HP 2

- Constructive Form B3+B5
- RPM 2900
- **Three-phase 230/400 V - 50/60 HZ**
- 2 Poles IE3 Protection IP55
- Ambient temperature -30°C + 45°C

Kw 2.2 HP 3

- Constructive Form B3+B5
- RPM 2900
- **Three-phase 230/400 V - 50/60 HZ**
- 2 Poles IE3 Protection IP55
- Ambient temperature -30°C + 45°C

Kw 1.5 HP 2

- Constructive Form B3+B5
- RPM 2900
- **Single-phase**
- Ambient temperature -30°C + 45°C

Kw 2.2 HP 3

- Constructive Form B3+B5
- RPM 2900
- **Single-phase**
- Ambient temperature -30°C + 45°C

ELECTRIC MOTORS AVAILABLE ON REQUEST:

- Single-phase (up to 3 kw)
- ATEX
- NEMA 56C*/NEMA 145 TR


* (only pump available, with American flange, for coupling with NEMA motor - the motor is not available in our standard)

IMPELLER	Motor 1.5 Kw (2 HP)	Motor 2.2 Kw (3 HP)
Ø 123 mm (Standard)	up to 1.1 g/cm ³	up to 1.8 g/cm ³
Ø 108 mm	up to 1.6 g/cm ³	up to 2 g/cm ³
Ø 90 mm	up to 2 g/cm ³	up to 2 g/cm ³

OPERATING TEMPERATURES** AND WEIGHTS

PP (with glass additive)	da 0°C a + 70°C, 2,2 Kg*
PVDF (with carbon additive)	da -10°C a + 100°C, 2,5 Kg*

*The weights refer to the pump without the motor
 **Measurements should be taken with agitated water; temperatures may vary depending on the conditions of the system and/or the processed liquid

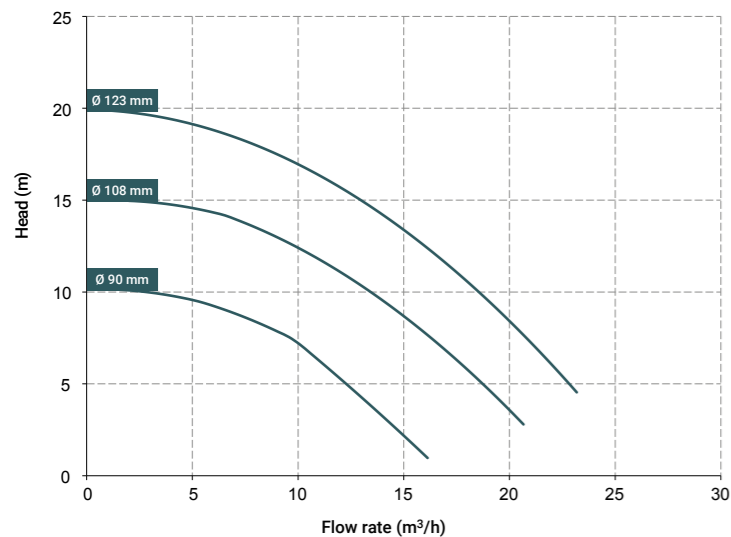

DM 30

Specifications and types

Suction fittings	2" f BSPP or DN 50 - NPT
Delivery fittings	1"1/2 m BSPP or DN 40 - NPT
Max. flow rate	35 m ³ /h
Min. flow rate	4 m ³ /h
Max. head	24 m
Viscosity up to	150 cps

STANDARD ELECTRIC MOTOR:

Kw 2.2 HP 3

- Constructive Form B3+B5
- RPM 2900
- **Three-phase 230/400 V - 50/60 HZ**
- 2 Poles IE3 Protection IP55
- Ambient temperature -30°C + 45°C

Kw 3 HP 4

- Constructive Form B3+B5
- RPM 2900
- **Three-phase 230/400 V - 50/60 HZ**
- 2 Poles IE3 Protection IP55
- Ambient temperature -30°C + 45°C

Kw 4 HP 5.5

- Constructive Form B3+B5
- RPM 2900
- **Three-phase 230/400 V - 50/60 HZ**
- 2 Poles IE3 Protection IP55
- Ambient temperature -30°C + 45°C

Kw 2.2 HP 3

- Constructive Form B3+B5
- RPM 2900
- **Single-phase**
- Ambient temperature -30°C + 45°C

Kw 3 HP 4

- Constructive Form B3+B5
- RPM 2900
- **Single-phase**
- Ambient temperature -30°C + 45°C

ELECTRIC MOTORS AVAILABLE ON REQUEST:

- Single-phase (up to 3 kw)
- ATEX
- NEMA 145TC* / 184TC*


* (only pump available, with American flange, for coupling with NEMA motor - the motor is not available in our standard)

IMPELLER	M. 2.2 Kw (3 HP)	M. 3 Kw (4 HP)	M. 4 Kw (5.5 HP)
Ø 134 mm (Standard)	up to 1.1 g/cm ³	up to 1.5 g/cm ³	up to 1.8 g/cm ³
Ø 122 mm	up to 14 g/cm ³	up to 2 g/cm ³	up to 2 g/cm ³
Ø 110 mm	up to 1.8 g/cm ³	up to 2 g/cm ³	up to 2 g/cm ³

OPERATING TEMPERATURES** AND WEIGHTS

PP (with glass additive)	da 0°C a + 70°C, 2,2 Kg*
PVDF (with carbon additive)	da -10°C a + 100°C, 2,5 Kg*


*The weights refer to the pump without the motor
 **Measurements should be taken with agitated water; temperatures may vary depending on the conditions of the system and/or the processed liquid

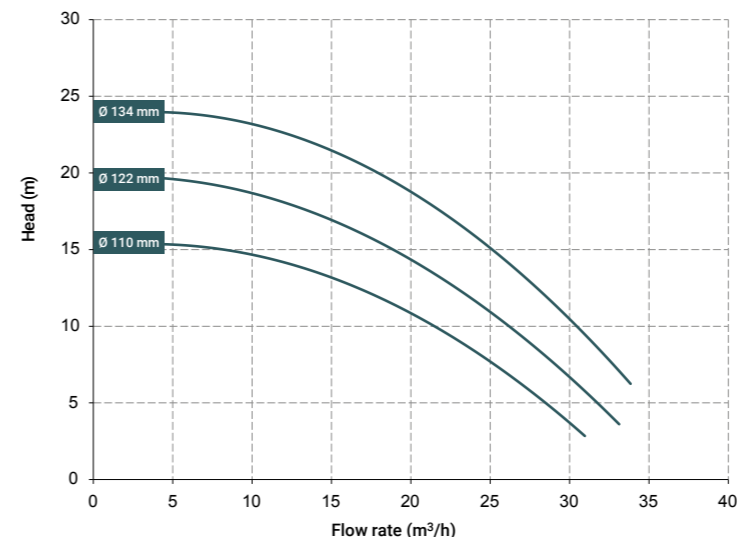

KM 70

Specifications and types

Suction fittings	3" f BSPP or DN 80 - NPT on request
Delivery fittings	2"1/2 m BSPP or DN 65 - NPT on request
Max. flow rate	65 m ³ /h
Max. head	29 m
Viscosity up to	150 cps

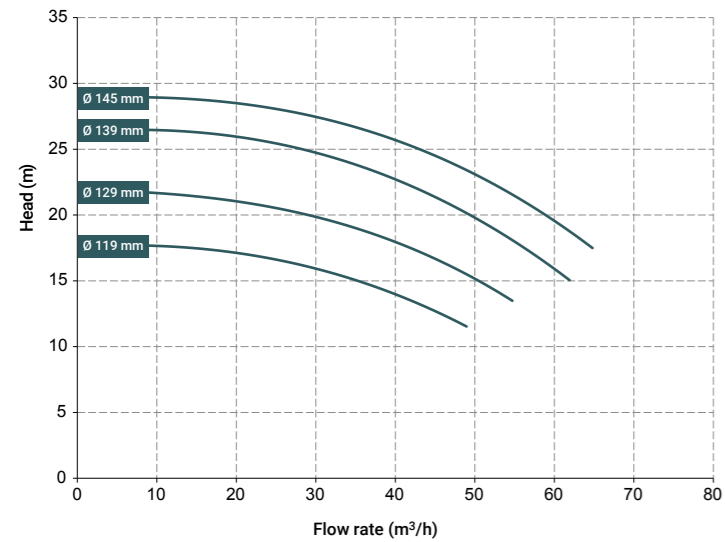

STANDARD ELECTRIC MOTOR:

Kw 4 HP 5.5

- Constructive Form B5
- RPM 2900
- **Three-phase 230/400 V - 50/60 HZ**
- ATEX available on request

Kw 5.5 HP 7.5

- Constructive Form B5
- RPM 2900
- **Three-phase 400/690 V - 50/60 HZ**
- ATEX available on request

Kw 7.5 HP 10


- Constructive Form B5
- RPM 2900
- **Three-phase 400/690 V - 50/60 HZ**
- ATEX available on request

OPERATING TEMPERATURES** AND WEIGHTS

PP (with glass additive)	da 0°C a + 70°C, 33 Kg*
PVDF (with carbon additive)	da -10°C a + 100°C, 34.5 Kg*

*The weights refer to the pump without the motor
 **Measurements should be taken with agitated water; temperatures may vary depending on the conditions of the system and/or the processed liquid

MAIN APPLICATION SECTORS



IMPELLER

- Ø 145 mm (Standard)
- Ø 139 mm
- Ø 129 mm
- Ø 119 mm

LINE INTRODUCTION

MB

The horizontal centrifugal pumps with a resin casing, are driven by a direct drive electric motor (max 3000 RPM) to transfer and/or empty liquids quickly, with flow rates from 6 to 80 m3/hour.

Their unique open impeller design allows them to pump even very dirty fluids with an apparent viscosity up to 500 cps (at 20°C) and small-sized suspended solids. They are available in two version with different

internal mechanical seal, based on their use, TL (lip seal) and TS (bellows seal).

They are driven by the impeller that, integrated with the shaft and the electric motor (direct drive), is rotated creating, due to centrifugal effect, a suction on the central duct and a delivery on the peripheral duct.



Product designed and constructed in Italy

Constructed in polypropylene or PVDF

Under head use

No welded seams

Can also be used with fluids with suspended solids

Extremely easy maintenance

Suitable for continuous use

Available with:

- Mechanical bellows seal (new generation "Self-locking" system)

- Aisi 304 spring - Seal ring in Silicon Carbide + Ceramic / Silicon Carbide + Silicon Carbide

- Lip seal: VITON® o EPDM

MB PUMPS CODES ENCODING

ex. MB080-P-TLVN
MB 80 PP, Viton® lip seal, three-phase motor.

MB80	P	TLV	N
PUMP MODEL	PUMP MATERIAL	TYPE OF SEAL	MOTOR
MB 080 - MB 80 MB 100 - MB 100 MB 110 - MB 110 MB 120 - MB 120 MB 130 - MB 130 MB 140 - MB 140 MB 150 - MB 150 MB 155 - MB 155 MB 160 - MB 160 MB 180 - MB 180	P - Polypropylene FC - PVDF+CF	TLV - Lip seal Viton® TLD - EPDM lip seal TSV - bellows seal Viton® TSD - EPDM bellows seal	N* - Three-phase M - Single-phase A - ATEX S - Without Motor

* Three-phase asynchronous eurotension motor fitted as standard (2 poles) 50Hz

HORIZONTAL CENTRIFUGAL PUMPS

MB 80

Specifications and types

Suction fittings	1"1/2 f BSPP or DN 40
Delivery fittings	1" m BSPP or DN 25
Max. flow rate	6 m3/h
Max. head	7.5 m
Viscosity up to	500 cps
Standard open impeller	Ø 85 mm H 9 mm *
Solids passing	Ø max 5 mm

* Special versions are available on request for the fluid pumped



PLASTIC MATERIAL
PP



PLASTIC MATERIAL
PVDF




MATERIALS OF CONSTRUCTION PUMP CASING, OPERATING TEMPERATURES** AND NET WEIGHT

POLYPROPYLENE (with glass additive)	1.7 Kg* Temp. 0°C min. +70°C max
PVDF (with carbon additive)	2.2 Kg* Temp. -10°C min. +100°C max

* The weights refer to the pump without the motor
**Measurements should be taken with agitated water; temperatures may vary depending on the conditions of the system and/or the processed liquid

STANDARD ELECTRIC MOTOR:

Kw	0.37
HP	0.5
Constructive Form	B3 + B14
RPM	2900 / 3600
Three-phase 230/400 V	-
50/60 Hz	-
2 poles	-
Efficiency class	IE2
Protection	IP55
Ambient temperature	-30°C + 45°C
Aluminium/Cast iron	-
Single-phase (up to 3 kw)	on request
ATEX	on request

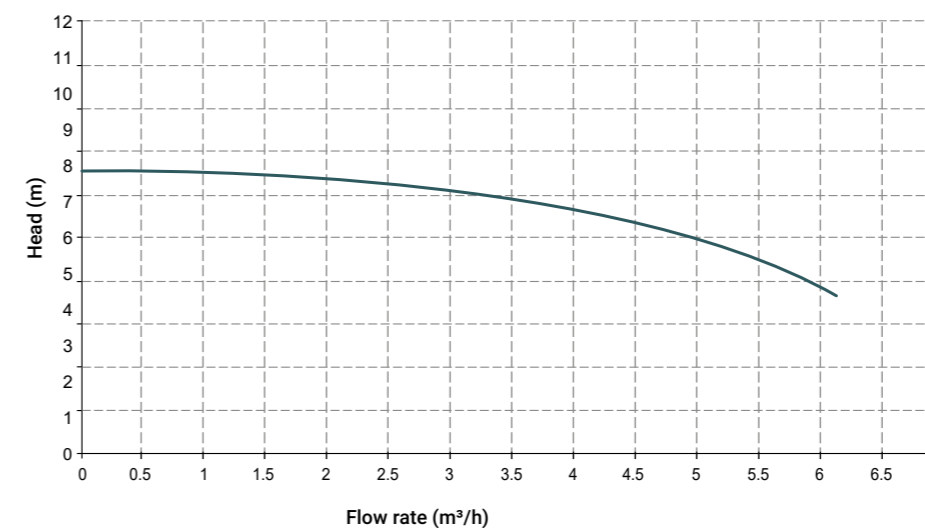

MAIN APPLICATION SECTORS


AUTOMOTIVE	WATER AND SLUDGE TREATMENT
CHEMICAL INDUSTRY	GALVANIC AND ELECTRONIC INDUSTRY

MB 100

Specifications and types

Suction fittings	1"1/2 f BSPP or DN 40
Delivery fittings	1" m BSPP or DN 25
Max. flow rate	9 m ³ /h
Max. head	12 m
Viscosity up to	500 cps
Standard open impeller	Ø 97 mm H 12 mm *
Solids passing	Ø max 7 mm

* Special versions are available on request for the fluid pumped

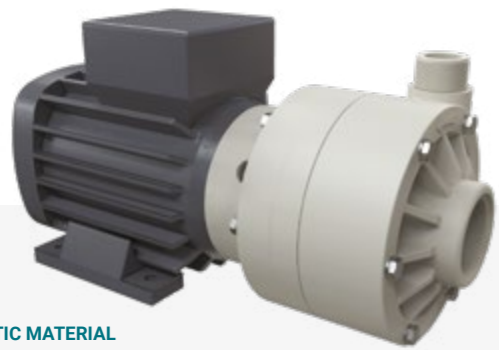

PLASTIC MATERIAL
PP



MATERIALS OF CONSTRUCTION PUMP CASING, OPERATING TEMPERATURES** AND NET WEIGHT

POLYPROPYLENE (with glass additive) 1.7 Kg*
Temp. 0°C min. +70°C max

PVDF (with carbon additive) 2.2 Kg*
Temp. -10°C min. +100°C max


* The weights refer to the pump without the motor
**Measurements should be taken with agitated water; temperatures may vary depending on the conditions of the system and/or the processed liquid

STANDARD ELECTRIC MOTOR:

Kw	0.55
HP	0.75
Constructive Form	B3 + B14
RPM	2900 / 3600
Three-phase 230/400 V	-
50/60 Hz	-
2 poles	-
Efficiency class	IE2
Protection	IP55
Ambient temperature	-30°C + 45°C
Aluminium/Cast iron	-
Single-phase (up to 3 kw)	on request
ATEX	on request



PLASTIC MATERIAL
PVDF

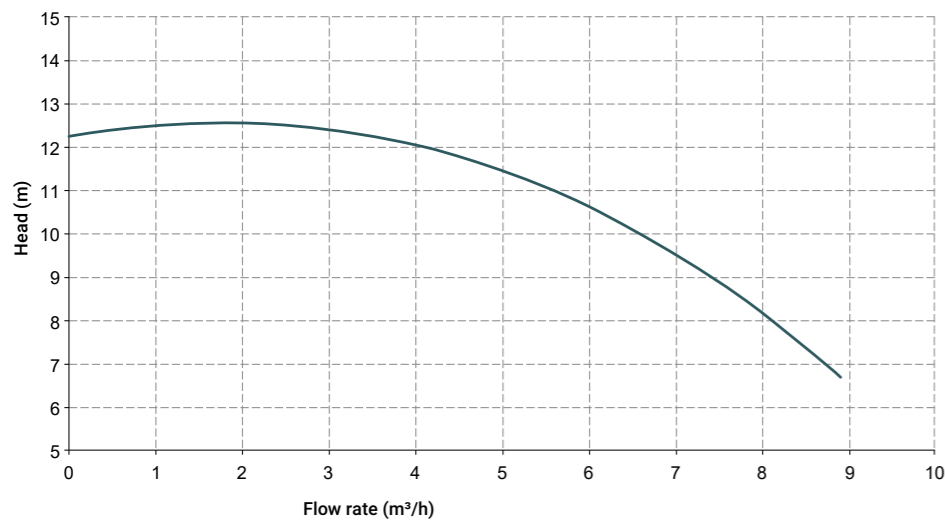

MAIN APPLICATION SECTORS

AUTOMOTIVE

WATER AND SLUDGE TREATMENT

CHEMICAL INDUSTRY

GALVANIC AND ELECTRONIC INDUSTRY

MB 110

Specifications and types

Suction fittings	2" m BSPP or DN 50
Delivery fittings	1"1/2 m BSPP or DN 40
Max. flow rate	18 m ³ /h
Max. head	16 m
Viscosity up to	500 cps
Standard open impeller	Ø 130 mm H 4 mm *
Solids passing	Ø max 2 mm

* Special versions are available on request for the fluid pumped



PLASTIC MATERIAL
PP



MATERIALS OF CONSTRUCTION PUMP CASING, OPERATING TEMPERATURES** AND NET WEIGHT

POLYPROPYLENE (with glass additive) 3.4 Kg*
Temp. 0°C min. +70°C max

PVDF (with carbon additive) 4.3 Kg*
Temp. -10°C min. +100°C max


* The weights refer to the pump without the motor
**Measurements should be taken with agitated water; temperatures may vary depending on the conditions of the system and/or the processed liquid

STANDARD ELECTRIC MOTOR:

Kw	1.1
HP	1.5
Constructive Form	B3 + B5
RPM	2900 / 3600
Three-phase 230/400 V	-
50/60 Hz	-
2 poles	-
Efficiency class	IE3
Protection	IP55
Ambient temperature	-30°C + 45°C
Aluminium/Cast iron	-
Single-phase (up to 3 kw)	on request
ATEX	on request



PLASTIC MATERIAL
PVDF

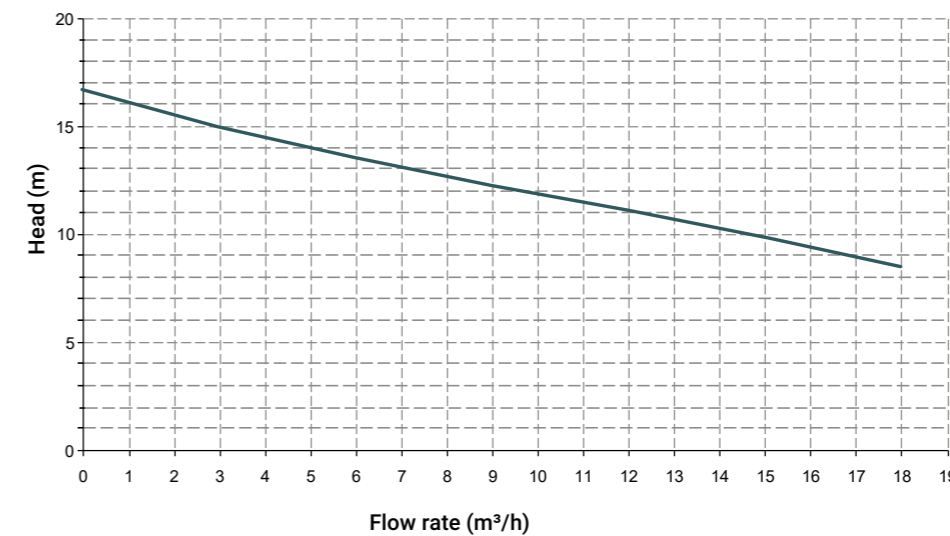

MAIN APPLICATION SECTORS

AUTOMOTIVE

WATER AND SLUDGE TREATMENT

CHEMICAL INDUSTRY

GALVANIC AND ELECTRONIC INDUSTRY

MB 120

Specifications and types

Suction fittings	2" m BSPP or DN 50
Delivery fittings	1"1/2 m BSPP or DN 40
Max. flow rate	25 m ³ /h
Max. head	17 m
Viscosity up to	500 cps
Standard open impeller	Ø 120 mm H 8 mm *
Solids passing	Ø max 6 mm

* Special versions are available on request for the fluid pumped



PLASTIC MATERIAL
PP



MATERIALS OF CONSTRUCTION PUMP CASING, OPERATING TEMPERATURES** AND NET WEIGHT

POLYPROPYLENE (with glass additive)	3.8 Kg* Temp. 0°C min. +70°C max
--	--

PVDF (with carbon additive)	4.9 Kg* Temp. -10°C min. +100°C max
------------------------------------	---


* The weights refer to the pump without the motor
**Measurements should be taken with agitated water; temperatures may vary depending on the conditions of the system and/or the processed liquid

STANDARD ELECTRIC MOTOR:

Kw	1.5
HP	2
Constructive Form	B3 + B5
RPttM	2900 / 3600
Three-phase 230/400 V	-
50/60 Hz	-
2 poles	-
Efficiency class	IE3
Protection	IP55
Ambient temperature	-30°C + 45°C
Aluminium/Cast iron	-
Single-phase (up to 3 kw)	on request
ATEX	on request



PLASTIC MATERIAL
PVDF

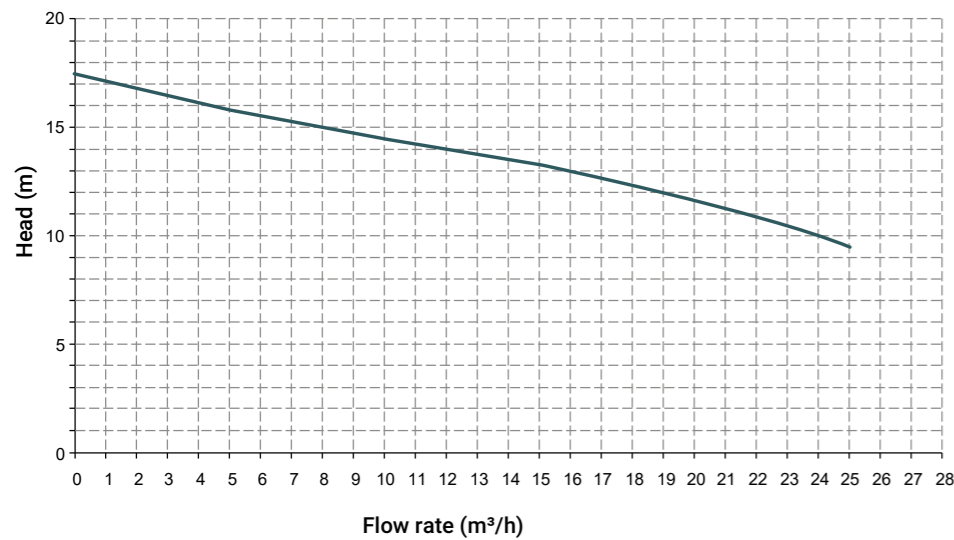

MAIN APPLICATION SECTORS

AUTOMOTIVE

WATER AND SLUDGE TREATMENT

CHEMICAL INDUSTRY

GALVANIC AND ELECTRONIC INDUSTRY

MB 130

Specifications and types

Suction fittings	2" m BSPP or DN 50
Delivery fittings	1"1/2 m BSPP or DN 40
Max. flow rate	30 m ³ /h
Max. head	22 m
Viscosity up to	500 cps
Standard open impeller	Ø 130 mm H 8 mm *
Solids passing	Ø max 6 mm

* Special versions are available on request for the fluid pumped



PLASTIC MATERIAL
PP



MATERIALS OF CONSTRUCTION PUMP CASING, OPERATING TEMPERATURES** AND NET WEIGHT

POLYPROPYLENE (with glass additive)	3.8 Kg* Temp. 0°C min. +70°C max
--	--

PVDF (with carbon additive)	4.9 Kg* Temp. -10°C min. +100°C max
------------------------------------	---


* The weights refer to the pump without the motor
**Measurements should be taken with agitated water; temperatures may vary depending on the conditions of the system and/or the processed liquid

STANDARD ELECTRIC MOTOR:

Kw	2.2
HP	3
Constructive Form	B3 + B5
RPM	2900 / 3600
Three-phase 230/400 V	-
50/60 Hz	-
2 poles	-
Efficiency class	IE3
Protection	IP55
Ambient temperature	-30°C + 45°C
Aluminium/Cast iron	-
Single-phase (up to 3 kw)	on request
ATEX	on request



PLASTIC MATERIAL
PVDF

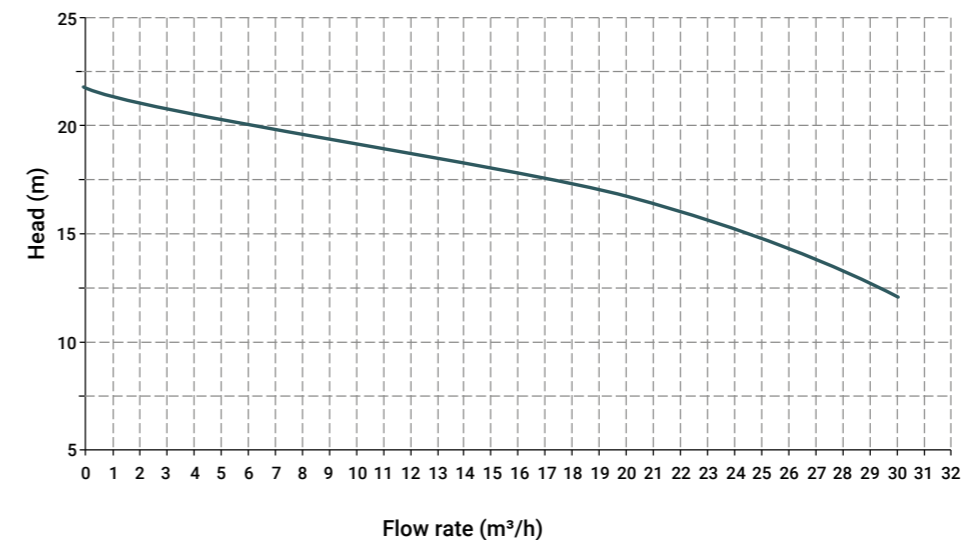

MAIN APPLICATION SECTORS

GALVANIC AND ELECTRONIC INDUSTRY

WATER AND SLUDGE TREATMENT

CHEMICAL INDUSTRY

MB 140

Specifications and types

Suction fittings	2" m BSPP or DN 50
Delivery fittings	1 1/2" m BSPP or DN 40
Max. flow rate	38 m ³ /h
Max. head	23 m
Viscosity up to	500 cps
Standard open impeller	Ø 130 mm H 14 mm *
Solids passing	Ø max 12 mm

* Special versions are available on request for the fluid pumped



PLASTIC MATERIAL
PP



MATERIALS OF CONSTRUCTION PUMP CASING, OPERATING TEMPERATURES** AND NET WEIGHT

POLYPROPYLENE (with glass additive)	4 Kg*
	Temp. 0°C min. +70°C max

PVDF (with carbon additive)	5 Kg*
	Temp. -10°C min. +100°C max


* The weights refer to the pump without the motor
**Measurements should be taken with agitated water; temperatures may vary depending on the conditions of the system and/or the processed liquid

STANDARD ELECTRIC MOTOR:

Kw	3
HP	4
Constructive Form	B3 + B14
RPM	2900 / 3600
Three-phase 230/400 V	-
50/60 Hz	-
2 poles	-
Efficiency class	IE3
Protection	-
Ambient temperature	-30°C + 45°C
Aluminium/Cast iron	-
Single-phase (up to 3 kw)	on request
ATEX	on request



PLASTIC MATERIAL
PVDF

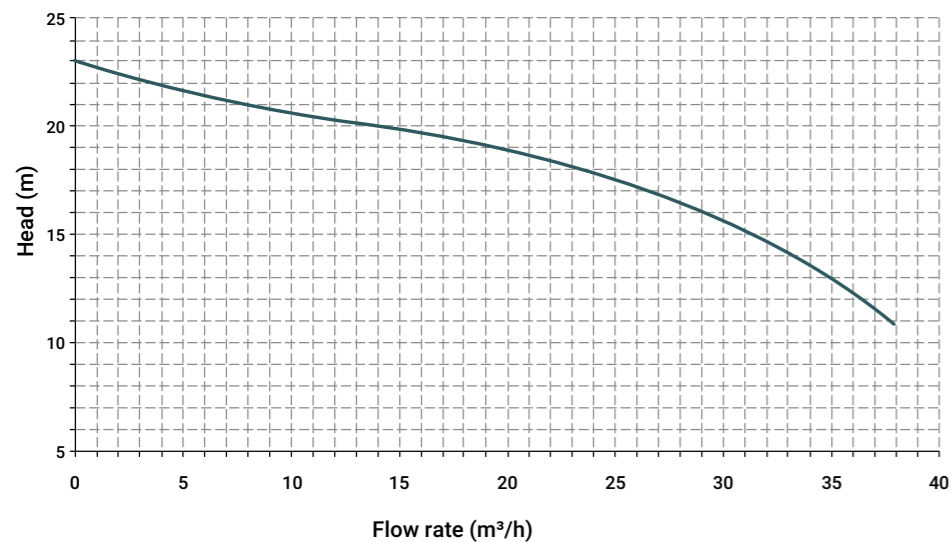

MAIN APPLICATION SECTORS

AUTOMOTIVE

WATER AND SLUDGE TREATMENT

CHEMICAL INDUSTRY

GALVANIC AND ELECTRONIC INDUSTRY

MB 150

Specifications and types

Suction fittings	2 1/2" f BSPP or DN 65
Delivery fittings	2" m BSPP or DN 50
Max. flow rate	50 m ³ /h
Max. head	26 m
Viscosity up to	500 cps
Standard open impeller	Ø 160 mm H 5.5 mm -10° *
Solids passing	Ø max 2 mm

* Special versions are available on request for the fluid pumped



PLASTIC MATERIAL
PP



MATERIALS OF CONSTRUCTION PUMP CASING, OPERATING TEMPERATURES** AND NET WEIGHT


POLYPROPYLENE (with glass additive)	8.1 Kg*
	Temp. 0°C min. +70°C max

PVDF (with carbon additive)	11 Kg*
	Temp. -10°C min. +100°C max


* The weights refer to the pump without the motor
**Measurements should be taken with agitated water; temperatures may vary depending on the conditions of the system and/or the processed liquid

STANDARD ELECTRIC MOTOR:

Kw	4
HP	5.5
Constructive Form	B3 + B5
RPM	2900 / 3600
Three-phase 230/400 V	-
50/60 Hz	-
2 poles	-
Efficiency class	IE3
Protection	IP55
Ambient temperature	-30°C + 45°C
Aluminium/Cast iron	-
ATEX	on request

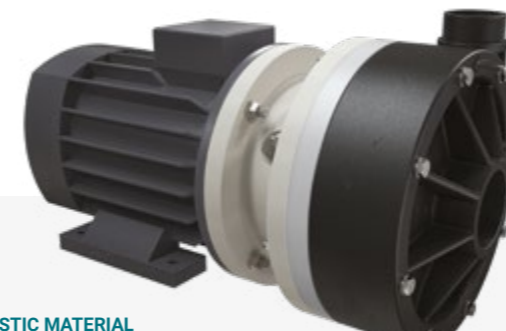

PLASTIC MATERIAL
PVDF

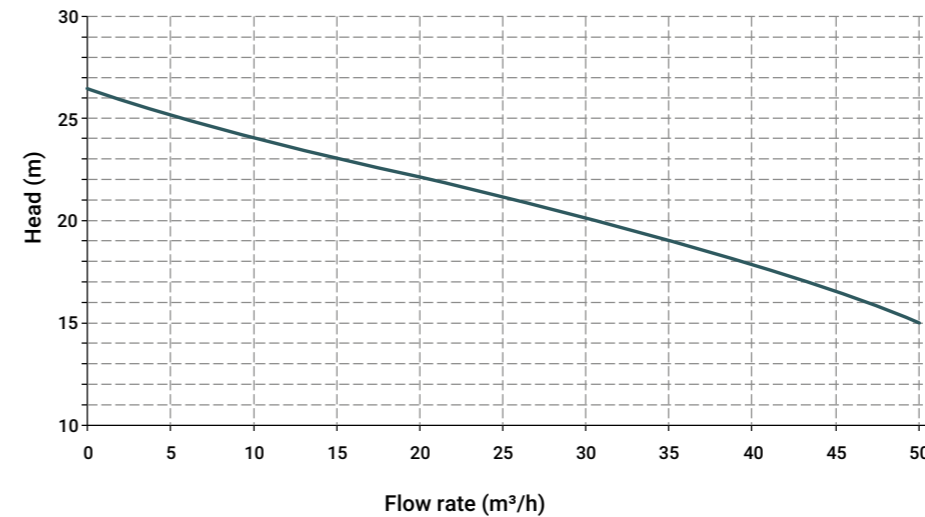

MAIN APPLICATION SECTORS

AUTOMOTIVE

WATER AND SLUDGE TREATMENT

CHEMICAL INDUSTRY


GALVANIC AND ELECTRONIC INDUSTRY

MB 155

Specifications and types

Suction fittings	2"1/2 f BSPP or DN 65
Delivery fittings	2" BSPP m or DN 50
Max. flow rate	60 m ³ /h
Max. head	26 m
Viscosity up to	500 cps
Standard open impeller	Ø 162 mm H 5 mm -10 ° *
Solids passing	Ø max 3 mm

* Special versions are available on request for the fluid pumped

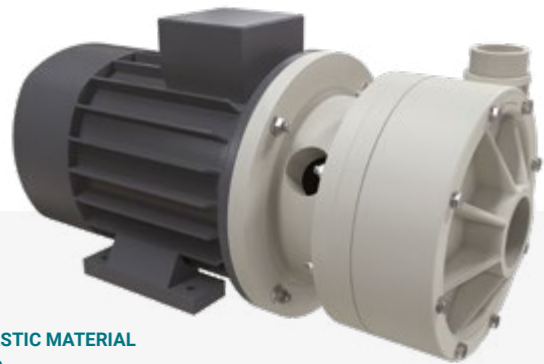

PLASTIC MATERIAL
PP



MATERIALS OF CONSTRUCTION PUMP CASING, OPERATING TEMPERATURES** AND NET WEIGHT


POLYPROPYLENE (with glass additive)	9.5 Kg* Temp. 0°C min. +70°C max
--	--

PVDF (with carbon additive)	12.4 Kg* Temp. -10°C min. +100°C max
------------------------------------	--


* The weights refer to the pump without the motor
**Measurements should be taken with agitated water; temperatures may vary depending on the conditions of the system and/or the processed liquid

STANDARD ELECTRIC MOTOR:

Kw	5.5
HP	7.5
Constructive Form	B3 + B5
RPM	2900
Three-phase 400/690 V	-
50/60 Hz	-
2 poles	-
Efficiency class	IE3
Protection	IP55
Ambient temperature	-30°C + 45°C
Aluminium/Cast iron	-
ATEX	on request

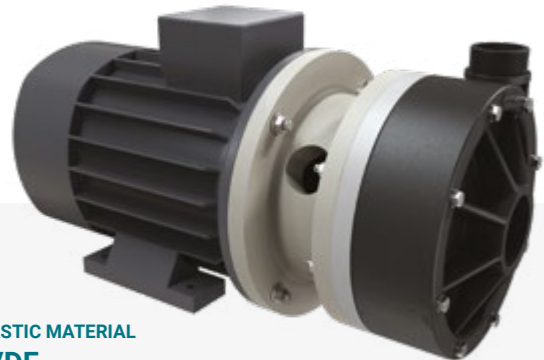

PLASTIC MATERIAL
PVDF

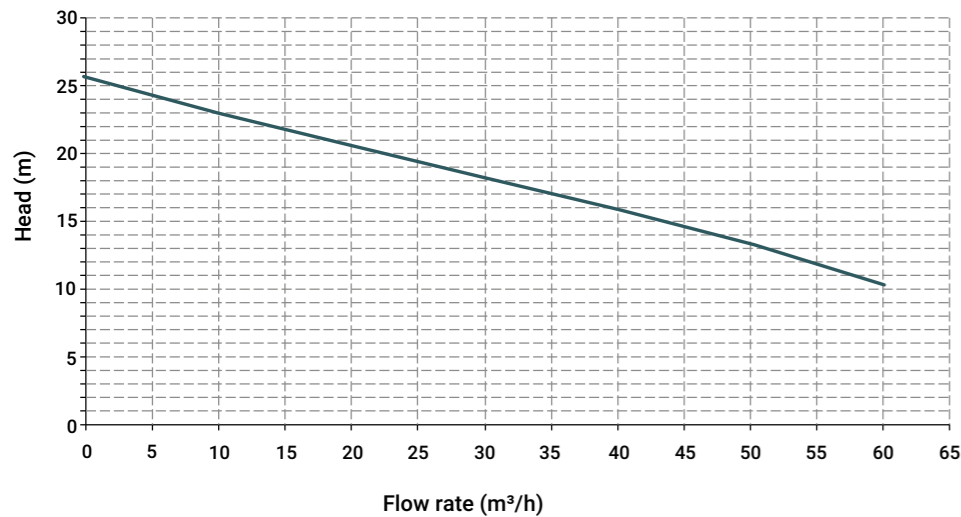

MAIN APPLICATION SECTORS

GALVANIC AND ELECTRONIC INDUSTRY

WATER AND SLUDGE TREATMENT


CHEMICAL INDUSTRY

MB 160

Specifications and types

Suction fittings	2"1/2 f BSPP or DN 65
Delivery fittings	2" m BSPP or DN 50
Max. flow rate	70 m ³ /h
Max. head	32 m
Viscosity up to	500 cps
Standard open impeller	Ø 162 mm H 11 mm -10 ° *
Solids passing	Ø max 9 mm

* Special versions are available on request for the fluid pumped

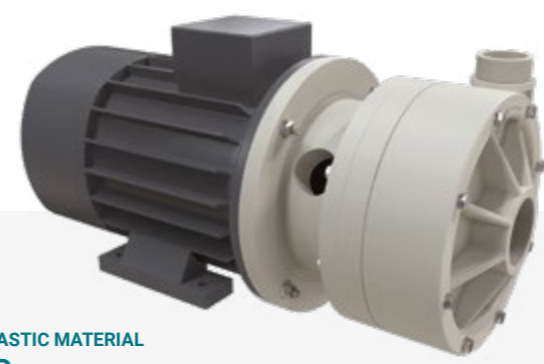

PLASTIC MATERIAL
PP



MATERIALS OF CONSTRUCTION PUMP CASING, OPERATING TEMPERATURES** AND NET WEIGHT


POLYPROPYLENE (with glass additive)	9.8 Kg* Temp. 0°C min. +70°C max
--	--

PVDF (with carbon additive)	12.2 Kg* Temp. -10°C min. +100°C max
------------------------------------	--


* The weights refer to the pump without the motor
**Measurements should be taken with agitated water; temperatures may vary depending on the conditions of the system and/or the processed liquid

STANDARD ELECTRIC MOTOR:

Kw	7.5
HP	10
Constructive Form	B3 + B5
RPM	2900
Three-phase 400/690 V	-
50/60 Hz	-
2 poles	-
Efficiency class	IE3
Protection	IP55
Ambient temperature	-30°C + 45°C
Aluminium/Cast iron	-
ATEX	on request

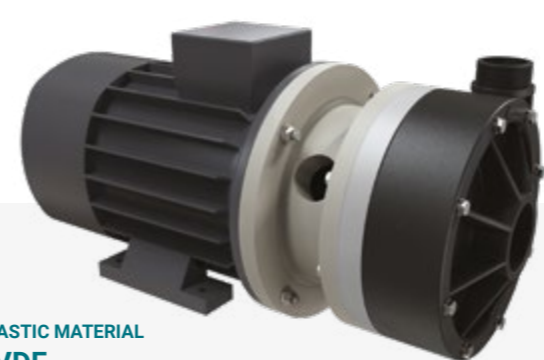

PLASTIC MATERIAL
PVDF

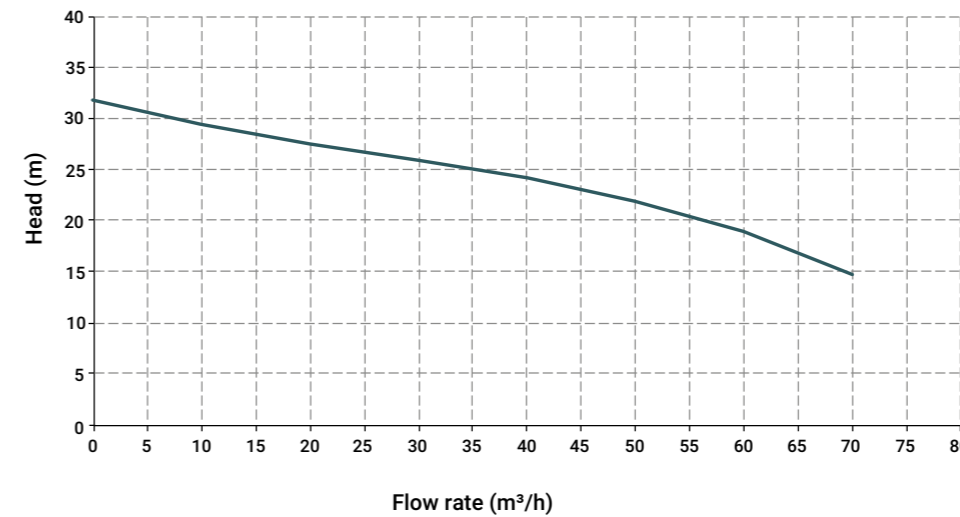

MAIN APPLICATION SECTORS

GALVANIC AND ELECTRONIC INDUSTRY

WATER AND SLUDGE TREATMENT

CHEMICAL INDUSTRY

MB 180

Specifications and types

Suction fittings	2"1/2 f BSPP or DN 65
Delivery fittings	2" m BSPP or DN 50
Max. flow rate	80 m ³ /h
Max. head	43 m
Viscosity up to	500 cps
Standard open impeller	176 mm H 15 mm -10 ° *
Solids passing	Ø max 9 mm

* Special versions are available on request for the fluid pumped



MATERIALS OF CONSTRUCTION PUMP CASING, OPERATING TEMPERATURES** AND NET WEIGHT


POLYPROPYLENE (with glass additive) 9.9 Kg*
Temp. 0°C min. +70°C max

PVDF (with carbon additive) 12.2 Kg*
Temp. -10°C min. +100°C max


* The weights refer to the pump without the motor
**Measurements should be taken with agitated water; temperatures may vary depending on the conditions of the system and/or the processed liquid

STANDARD ELECTRIC MOTOR:


Kw	11
HP	15
Constructive Form	B3 + B5
RPM	2900
Three-phase 400/690 V	-
50/60 Hz	-
2 poles	-
Efficiency class	IE3
Protection	IP55
Ambient temperature	-30°C + 45°C
Aluminium/Cast iron	-
ATEX	on request

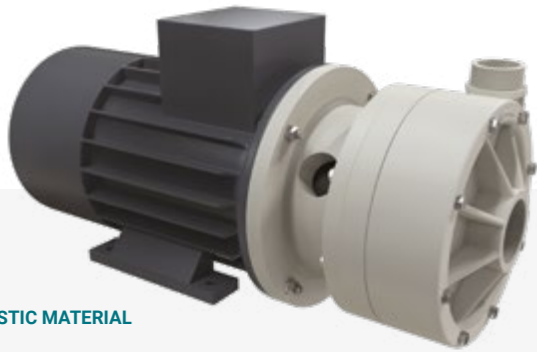



PLASTIC MATERIAL
PP

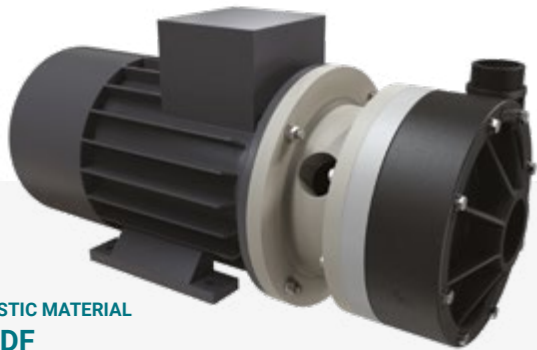

PLASTIC MATERIAL
PVDF

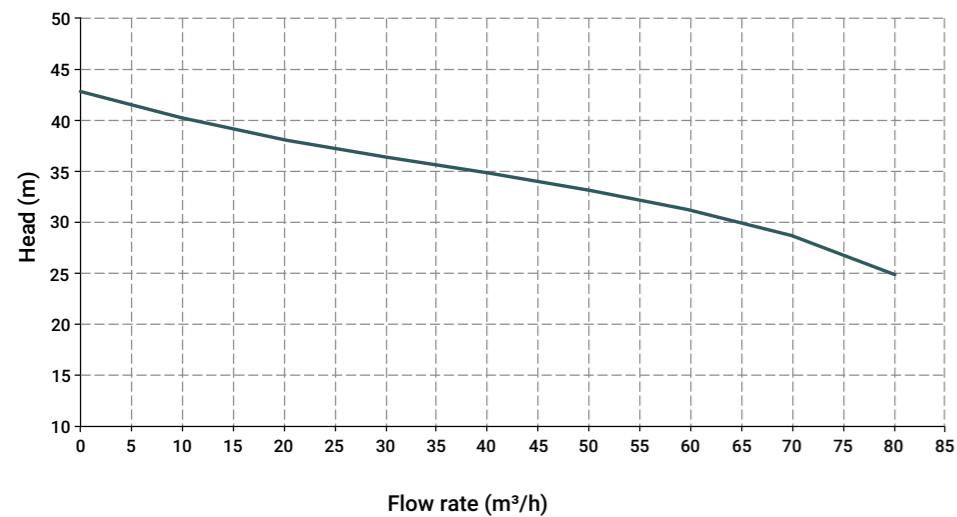


MAIN APPLICATION SECTORS

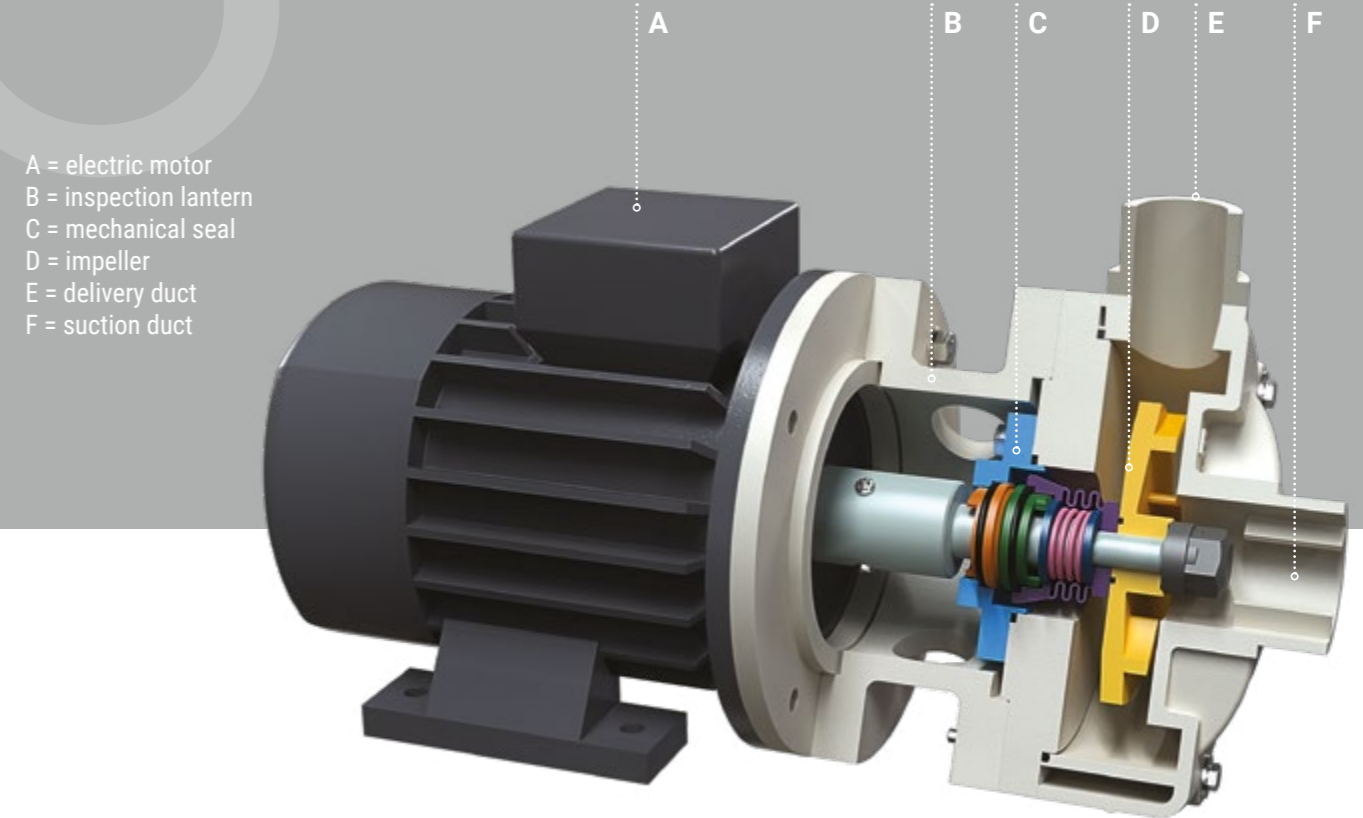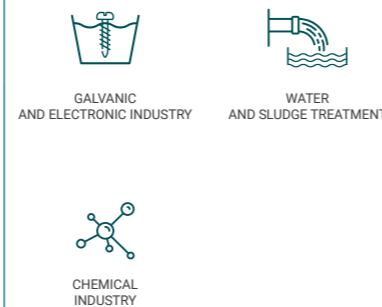


A = electric motor
B = inspection lantern
C = mechanical seal
D = impeller
E = delivery duct
F = suction duct

Pump type	Motor power
MB 80	0.37 Kw - 0.5 HP
MB 100	0.55 Kw - 0.75 HP
MB 110	1.1 Kw - 1.5 HP
MB 120	1.5 Kw - 2 HP
MB 130	2.2 Kw - 3 HP
MB 140	3 Kw - 4 HP
MB 150	4 Kw - 5.5 HP
MB 155	5.5 Kw - 7.5 HP
MB 160	7.5 Kw - 10 HP
MB 180	11 Kw - 15 HP

TL = LIP SEAL

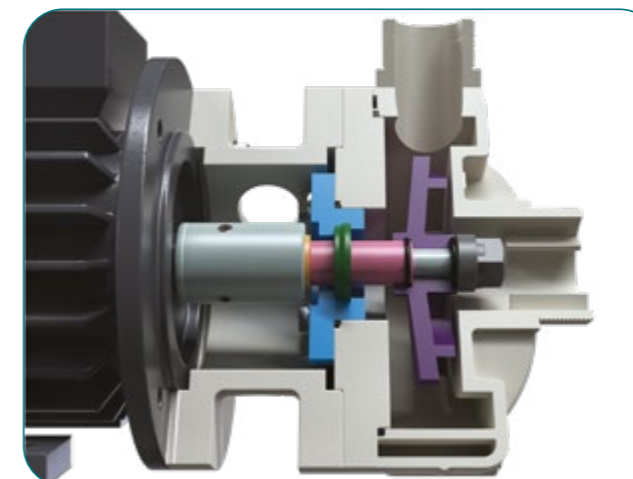

TS = BELLOWS SEAL

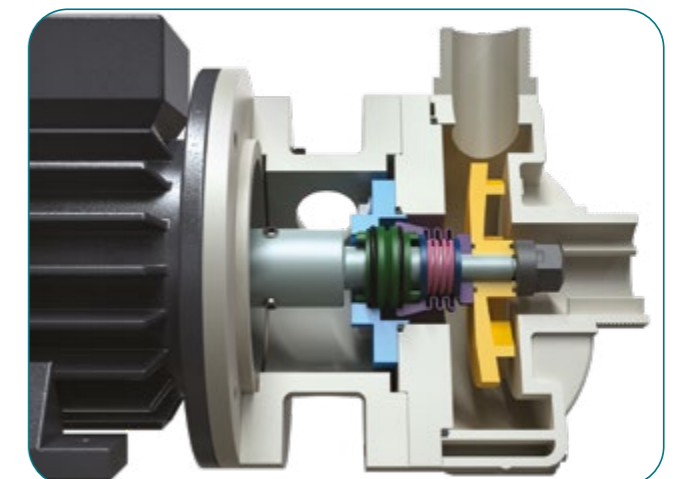

IM

The IM series vertical resin centrifugal pumps are high-efficiency pumps for fixed installations with the pump immersed directly in the tank. The pumps are driven by an electric motor (max 3000 rpm) in direct drive for fast emptying of the fluid with flow rates from 6 to 170 m³/hour and heads over 40 m.

The unique construction shape of this type of pump, as well as not using internal mechanical seals (subject to considerable wear), guarantees the collection in the tank of any accidental spillages of fluid. The open impeller design allows them to pump (in continuous flow) even very dirty fluids with an apparent

viscosity up to 500 cps (at 20°C) and small-sized suspended solids. The vast range of construction materials available for the pump allows us to select the best chemical compatibility with the fluid and/or the environment, without neglecting the correct temperature range.

They are driven by the impeller that, integrated with the shaft and the electric motor (direct drive), is rotated at a set speed creating, due to centrifugal effect, a suction on the central duct and a delivery on the peripheral duct.



- Product designed and constructed in Italy
- Constructed in polypropylene or PVDF
- Normalised electric motor
- Support lantern and connection between pump and motor with a flexible coupling
- Can also be used with fluids with suspended solids
- Suitable for continuous use

IM PUMPS CODES ENCODING

ex. IM140P-V-0800-N
IM140 PP, O-Ring Viton®, column height 800 mm, three-phase motor

IM140	P	V	0800	N
PUMP MODEL	PUMP MATERIAL	O-RING	COLUMN HEIGHT	MOTOR
IM 080 - IM 80 IM 090 - IM 90 IM 095 - IM 95 IM 110 - IM 110 IM 120 - IM 120 IM 130 - IM 130 IM 140 - IM 140 IM 150 - IM 150 IM 155 - IM 155 IM 160 - IM 160 IM 180 - IM 180 IM 200 - IM 200	P - Polypropylene FC - PVDF+CF	D - EPDM V - Viton®	0250 - 250 mm 0500 - 500 mm 0800 - 800 mm 1000 - 1000 mm 1250 - 1250 mm	N* - Three-phase M - Single-phase A - ATEX S - Without Motor

* Three-phase asynchronous eurotension motor fitted as standard (2 poles) 50Hz

IM 80

Specifications and types

Suction fittings	1"1/2 f BSPP or DN 40
Delivery fittings	G 1" BSPP m o DN 25
Max. flow rate	6 m ³ /h
Max. head	7.5 m
Viscosity up to	500 cps
Standard open impeller	Ø 85 mm H 9 mm*
Solids passing	Ø max 7 mm

* Special versions are available on request for the fluid pumped



STANDARD ELECTRIC MOTOR:

Kw	0.37
HP	0.5
Constructive form	B5
RPM	2900
Three-phase 230/400 V	-
50/60 Hz	-
2 poles	-
Efficiency class	IE2
Protection	IP55
Ambient temperature	-30°C + 45°C
Aluminium/Cast iron	-
Single-phase (up to 3 kw)	on request
ATEX	on request

STD COLUMN LENGTH	PP WEIGHT*	PVDF WEIGHT*
250 mm	6.5 Kg	7 Kg
500 mm	7.5 Kg	8 Kg
800 mm	10.5 Kg	11 Kg


* The weights refer to the pump without the motor
NB: Special executions only on request with column length from min. 250 mm to max. 1000 mm

OPERATING TEMPERATURES**:

PP (with glass additive)	0°C to + 70°C
PVDF (with carbon additive)	-10°C to + 100°C

**Measurements should be taken with agitated water; temperatures may vary depending on the conditions of the system and/or the processed liquid

LENGTH	Tmax (PP)	Tmax (PVDF)
500 mm	70	100
800 mm	65	95
1000 mm	60	90
1250 mm	55	85

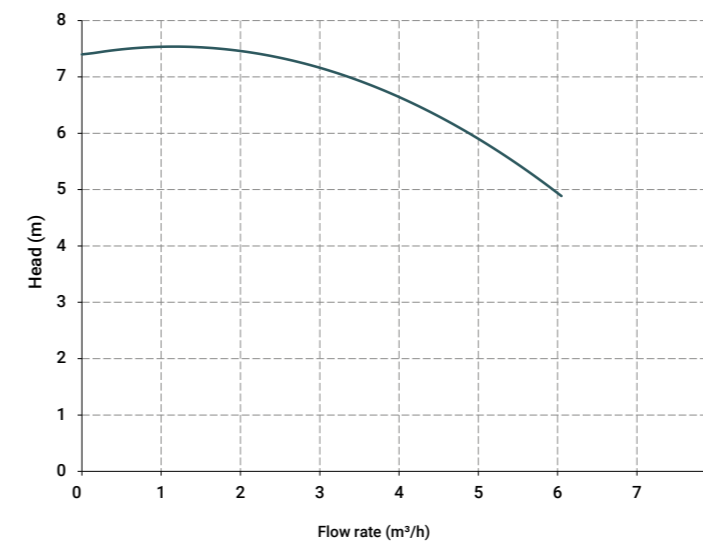

MAIN APPLICATION SECTORS

GALVANIC AND ELECTRONIC INDUSTRY

WATER AND SLUDGE TREATMENT

CHEMICAL INDUSTRY

IM 90

Specifications and types


Suction fittings	1"1/2 f BSPP or DN 40 on request
Delivery fittings	1" m BSPP or DN 25 on request
Max. flow rate	9 m ³ /h
Max. head	10.5 m
Viscosity up to	500 cps
Standard open impeller	Ø 97 mm H 12 mm *
Solids passing	Ø max 10 mm

* Special versions are available on request for the fluid pumped



PLASTIC MATERIAL
PP

PLASTIC MATERIAL
PVDF

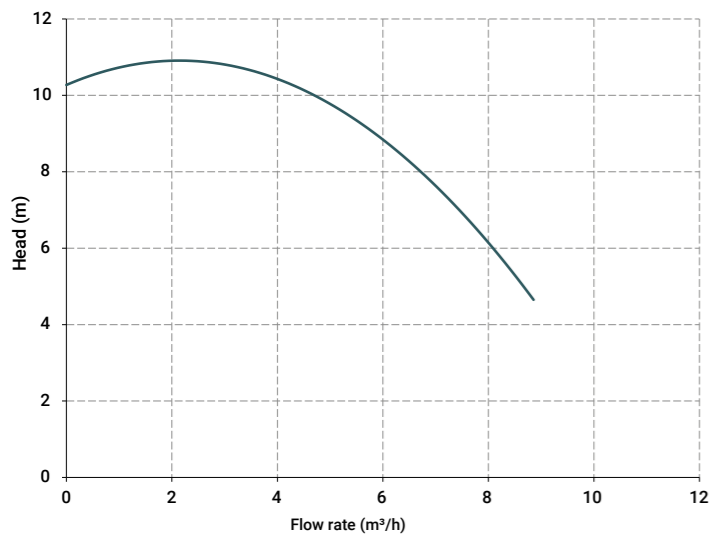

STANDARD ELECTRIC MOTOR:

Kw	0.55
HP	0.75
Constructive form	B5
RPM	2900
Three-phase 230/400 V	-
50/60 Hz	-
2 poles	-
Efficiency class	IE2
Protection	IP55
Ambient temperature	-30°C + 45°C
Aluminium/Cast iron	-
Single-phase (up to 3 kw)	on request
ATEX	on request

STD COLUMN LENGTH	PP WEIGHT*	PVDF WEIGHT*
250 mm	6.5 Kg	7 Kg
500 mm	7.5 Kg	8 Kg
800 mm	10.5 Kg	11 Kg

* The weights refer to the pump without the motor
NB: Special executions only on request with column length from min. 250 mm to max. 1000 mm


OPERATING TEMPERATURES**:

PP (with glass additive)	0°C to + 70°C
PVDF (with carbon additive)	-10°C to + 100°C


**Measurements should be taken with agitated water; temperatures may vary depending on the conditions of the system and/or the processed liquid

LENGTH	Tmax (PP)	Tmax (PVDF)
500 mm	70	100
800 mm	65	95
1000 mm	60	90
1250 mm	55	85


MAIN APPLICATION SECTORS




GALVANIC
AND ELECTRONIC INDUSTRY



WATER
AND SLUDGE TREATMENT



CHEMICAL INDUSTRY



GOLD PROCESSING INDUSTRY

IM 95

Specifications and types


Suction fittings	2" m BSPP or DN 50 on request
Delivery fittings	1"1/2 m BSPP or DN 40 on request
Max. flow rate	15 m ³ /h
Max. head	12 m
Viscosity up to	500 cps
Standard open impeller	Ø 100 mm H 7 mm *
Solids passing	Ø max 6 mm

* Special versions are available on request for the fluid pumped



PLASTIC MATERIAL
PP

PLASTIC MATERIAL
PVDF

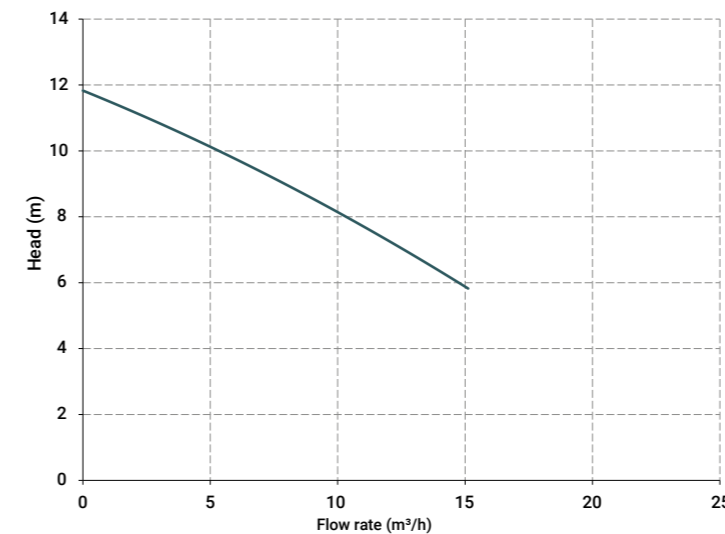

STANDARD ELECTRIC MOTOR:

Kw	0.75
HP	1
Constructive form	B5
RPM	2900
Three-phase 230/400 V	-
50/60 Hz	-
2 poles	-
Efficiency class	IE3
Protection	IP55
Ambient temperature	-30°C + 45°C
Aluminium/Cast iron	-
Single-phase (up to 3 kw)	on request
ATEX	on request

STD COLUMN LENGTH	PP WEIGHT*	PVDF WEIGHT*
500 mm	15 Kg	16 Kg
800 mm	19 Kg	20 Kg
1000 mm	22 Kg	23 Kg
1250 mm	24 Kg	25 Kg

* The weights refer to the pump without the motor
NB: Special executions only on request with column length from min. 350 mm to max. 1400 mm


OPERATING TEMPERATURES**:

PP (with glass additive)	0°C to + 70°C
PVDF (with carbon additive)	-10°C to + 100°C


**Measurements should be taken with agitated water; temperatures may vary depending on the conditions of the system and/or the processed liquid

LENGTH	Tmax (PP)	Tmax (PVDF)
500 mm	70	100
800 mm	65	95
1000 mm	60	90
1250 mm	55	85


MAIN APPLICATION SECTORS




GALVANIC
AND ELECTRONIC INDUSTRY



WATER
AND SLUDGE TREATMENT



CHEMICAL INDUSTRY



GOLD PROCESSING INDUSTRY

VERTICAL CENTRIFUGAL PUMPS

IM 110

Specifications and types


Suction fittings	2" m BSPP or DN 50 on request
Delivery fittings	1"1/2 m BSPP or DN 40 on request
Max. flow rate	20 m ³ /h
Max. head	15 m
Viscosity up to	500 cps
Standard open impeller	Ø 120 mm H 8 mm *
Solids passing	Ø max 6 mm

* Special versions are available on request for the fluid pumped



PLASTIC MATERIAL
PP

PLASTIC MATERIAL
PVDF

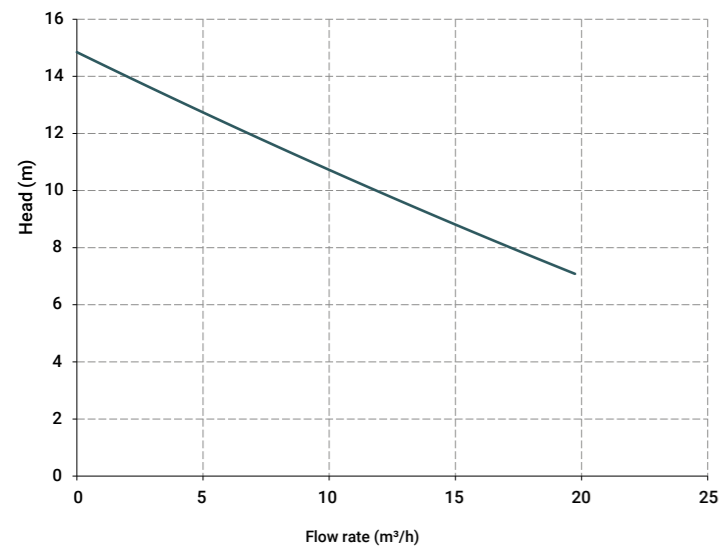

STANDARD ELECTRIC MOTOR:

Kw	1.1
HP	1.5
Constructive form	B5
RPM	2900
Three-phase 230/400 V	-
50/60 Hz	-
2 poles	-
Efficiency class	IE3
Protection	IP55
Ambient temperature	-30°C + 45°C
Aluminium/Cast iron	-
Single-phase (up to 3 kw)	on request
ATEX	on request

STD COLUMN LENGTH	PP WEIGHT*	PVDF WEIGHT*
500 mm	15 Kg	16 Kg
800 mm	19 Kg	20 Kg
1000 mm	22 Kg	23 Kg
1250 mm	24 Kg	25 Kg

* The weights refer to the pump without the motor
NB: Special executions only on request with column length from min. 350 mm to max. 1400 mm

OPERATING TEMPERATURES**:

PP (with glass additive)	0°C to + 70°C
PVDF (with carbon additive)	-10°C to + 100°C

**Measurements should be taken with agitated water; temperatures may vary depending on the conditions of the system and/or the processed liquid

LENGTH	Tmax (PP)	Tmax (PVDF)
500 mm	70	100
800 mm	65	95
1000 mm	60	90
1250 mm	55	85

MAIN APPLICATION SECTORS

GALVANIC AND ELECTRONIC INDUSTRY

WATER AND SLUDGE TREATMENT

CHEMICAL INDUSTRY

GOLD PROCESSING INDUSTRY

VERTICAL CENTRIFUGAL PUMPS

IM 120

Specifications and types


Suction fittings	2" m BSPP or DN 50 on request
Delivery fittings	1"1/2 m BSPP or DN 40 on request
Max. flow rate	25 m ³ /h
Max. head	15.5 m
Viscosity up to	500 cps
Standard open impeller	Ø 125 mm H 8 mm *
Solids passing	Ø max 6 mm

* Special versions are available on request for the fluid pumped



PLASTIC MATERIAL
PP

PLASTIC MATERIAL
PVDF

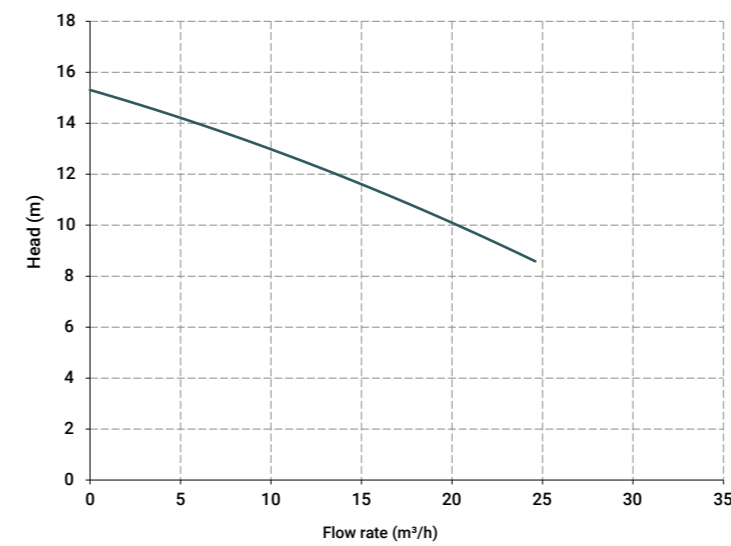

STANDARD ELECTRIC MOTOR:

Kw	1.5
HP	2
Constructive form	B5
RPM	2900
Three-phase 230/400 V	-
50/60 Hz	-
2 poles	-
Efficiency class	IE3
Protection	IP55
Ambient temperature	-30°C + 45°C
Aluminium/Cast iron	-
Single-phase (up to 3 kw)	on request
ATEX	on request

STD COLUMN LENGTH	PP WEIGHT*	PVDF WEIGHT*
500 mm	15 Kg	16 Kg
800 mm	19 Kg	20 Kg
1000 mm	22 Kg	23 Kg
1250 mm	24 Kg	25 Kg

* The weights refer to the pump without the motor
NB: Special executions only on request with column length from min. 350 mm to max. 1400 mm

OPERATING TEMPERATURES**:

PP (with glass additive)	0°C to + 70°C
PVDF (with carbon additive)	-10°C to + 100°C

**Measurements should be taken with agitated water; temperatures may vary depending on the conditions of the system and/or the processed liquid

LENGTH	Tmax (PP)	Tmax (PVDF)
500 mm	70	100
800 mm	65	95
1000 mm	60	90
1250 mm	55	85

MAIN APPLICATION SECTORS

GALVANIC AND ELECTRONIC INDUSTRY

WATER AND SLUDGE TREATMENT

CHEMICAL INDUSTRY

GOLD PROCESSING INDUSTRY

VERTICAL CENTRIFUGAL PUMPS

IM 130

Specifications and types

Suction fittings	2" m BSPP or DN 50 on request
Delivery fittings	G 1"1/2 m BSPP or DN 40 on request
Max. flow rate	30 m ³ /h
Max. head	20 m
Viscosity up to	500 cps
Standard open impeller	Ø 130 mm H 8 mm *
Solids passing	Ø max 6 mm

* Special versions are available on request for the fluid pumped

STANDARD ELECTRIC MOTOR:

Kw	2.2
HP	3
Constructive form	B5
RPM	2900
Three-phase 230/400 V	-
50/60 Hz	-
2 poles	-
Efficiency class	IE3
Protection	IP55
Ambient temperature	-30°C + 45°C
Aluminium/Cast iron	-
Single-phase (up to 3 kw)	on request
ATEX	on request

STD COLUMN LENGTH	PP WEIGHT*	PVDF WEIGHT*
500 mm	15 Kg	16 Kg
800 mm	19 Kg	20 Kg
1000 mm	22 Kg	23 Kg
1250 mm	24 Kg	25 Kg

* The weights refer to the pump without the motor
NB: Special executions only on request with column length from min. 350 mm to max. 1400 mm

OPERATING TEMPERATURES**:

PP (with glass additive)	0°C to + 70°C
PVDF (with carbon additive)	-10°C to + 100°C

**Measurements should be taken with agitated water; temperatures may vary depending on the conditions of the system and/or the processed liquid

LENGTH	Tmax (PP)	Tmax (PVDF)
500 mm	70	100
800 mm	65	95
1000 mm	60	90
1250 mm	55	85


MAIN APPLICATION SECTORS

GALVANIC AND ELECTRONIC INDUSTRY

WATER AND SLUDGE TREATMENT

CHEMICAL INDUSTRY

GOLD PROCESSING INDUSTRY

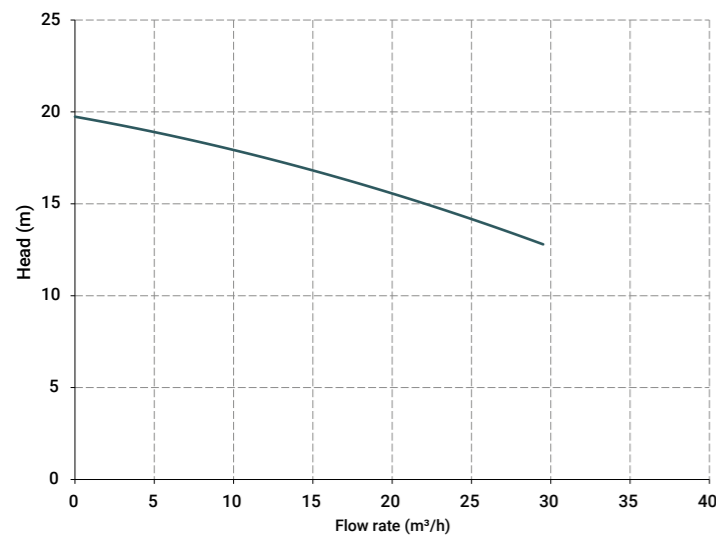

VERTICAL CENTRIFUGAL PUMPS

IM 140

Specifications and types

Suction fittings	2" m BSPP or DN 50 on request
Delivery fittings	1"1/2 m BSPP or DN 40 on request
Max. flow rate	40 m ³ /h
Max. head	21 m
Viscosity up to	500 cps
Standard open impeller	Ø 130 mm H 14 mm *
Solids passing	Ø max 12 mm

* Special versions are available on request for the fluid pumped

STANDARD ELECTRIC MOTOR:

Kw	3
HP	4
Constructive form	B5
RPM	2900
Three-phase 230/400 V	-
50/60 Hz	-
2 poles	-
Efficiency class	IE3
Protection	IP55
Ambient temperature	-30°C + 45°C
Aluminium/Cast iron	-
Single-phase (up to 3 kw)	on request
ATEX	on request

STD COLUMN LENGTH	PP WEIGHT*	PVDF WEIGHT*
500 mm	15 Kg	16 Kg
800 mm	19 Kg	20 Kg
1000 mm	22 Kg	23 Kg
1250 mm	24 Kg	25 Kg

* The weights refer to the pump without the motor
NB: Special executions only on request with column length from min. 350 mm to max. 1400 mm

OPERATING TEMPERATURES**:

PP (with glass additive)	0°C to + 70°C
PVDF (with carbon additive)	-10°C to + 100°C

**Measurements should be taken with agitated water; temperatures may vary depending on the conditions of the system and/or the processed liquid


LENGTH	Tmax (PP)	Tmax (PVDF)
500 mm	70	100
800 mm	65	95
1000 mm	60	90
1250 mm	55	85

MAIN APPLICATION SECTORS

GALVANIC AND ELECTRONIC INDUSTRY

WATER AND SLUDGE TREATMENT

CHEMICAL INDUSTRY

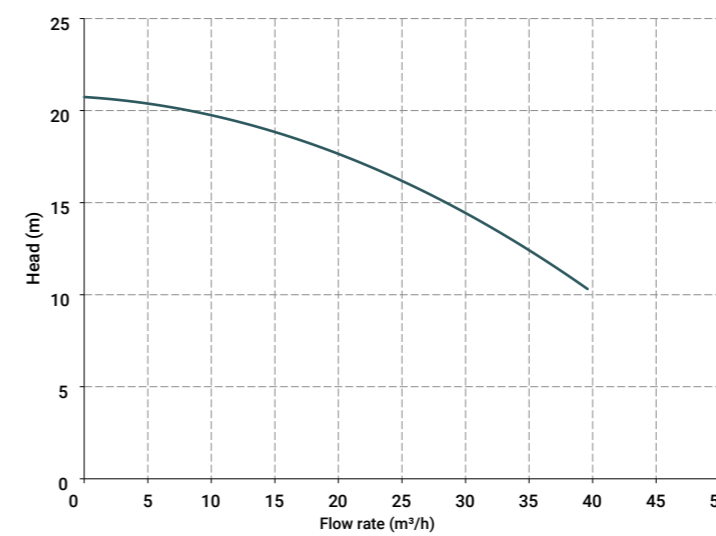

IM 150

Specifications and types

Suction fittings	2"1/2 f BSPP or DN 65 on request
Delivery fittings	2" m BSPP or DN 50 on request
Max. flow rate	42 m ³ /h
Max. head	24 m
Viscosity up to	500 cps
Standard open impeller	Ø 160 mm H 4 mm -10° *
Solids passing	Ø max 2 mm

* Special versions are available on request for the fluid pumped

STANDARD ELECTRIC MOTOR:

Kw	4
HP	5.5
Constructive form	B5
RPM	2900
Three-phase 230/400 V	-
50/60 Hz	-
2 poles	-
Efficiency class	IE3
Protection	IP55
Ambient temperature	-30°C + 45°C
Aluminium/Cast iron	-
ATEX	on request

STD COLUMN LENGTH	PP WEIGHT*	PVDF WEIGHT*
500 mm	28 Kg	30 Kg
800 mm	31 Kg	33 Kg
1000 mm	33 Kg	35 Kg
1250 mm	36 Kg	38 Kg

* The weights refer to the pump without the motor
NB: Special executions only on request with column length from min. 400 mm to max. 1400 mm


OPERATING TEMPERATURES**:

PP (with glass additive)	0°C to + 70°C
PVDF (with carbon additive)	-10°C to + 100°C


**Measurements should be taken with agitated water; temperatures may vary depending on the conditions of the system and/or the processed liquid

LENGTH	Tmax (PP)	Tmax (PVDF)
500 mm	70	100
800 mm	65	95
1000 mm	60	90
1250 mm	55	85


MAIN APPLICATION SECTORS




GALVANIC
AND ELECTRONIC INDUSTRY



WATER
AND SLUDGE TREATMENT



CHEMICAL INDUSTRY

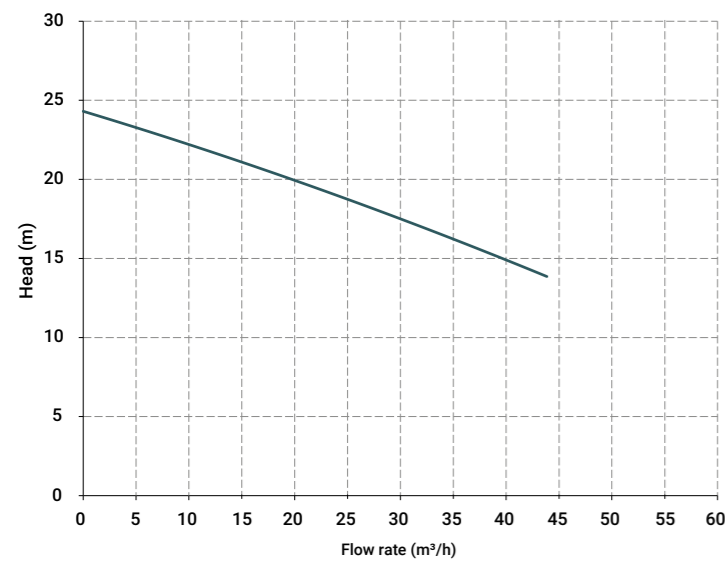

IM 155

Specifications and types

Suction fittings	2"1/2 f BSPP or DN 65 on request
Delivery fittings	2" m BSPP or DN 50 on request
Max. flow rate	42 m ³ /h
Max. head	27 m
Viscosity up to	500 cps
Standard open impeller	Ø 162 mm H 4 mm -10° *
Solids passing	Ø max 2 mm

* Special versions are available on request for the fluid pumped

STANDARD ELECTRIC MOTOR:

Kw	5.5
HP	7.5
Constructive form	B5
RPM	2900
Three-phase 400/690 V	-
50/60 Hz	-
2 poles	-
Efficiency class	IE3
Protection	IP55
Ambient temperature	-30°C + 45°C
Aluminium/Cast iron	-
ATEX	on request

STD COLUMN LENGTH	PP WEIGHT*	PVDF WEIGHT*
500 mm	28 Kg	30 Kg
800 mm	31 Kg	33 Kg
1000 mm	33 Kg	35 Kg
1250 mm	36 Kg	38 Kg

* The weights refer to the pump without the motor
NB: Special executions only on request with column length from min. 400 mm to max. 1400 mm


OPERATING TEMPERATURES**:

PP (with glass additive)	0°C to + 70°C
PVDF (with carbon additive)	-10°C to + 100°C


**Measurements should be taken with agitated water; temperatures may vary depending on the conditions of the system and/or the processed liquid

LENGTH	Tmax (PP)	Tmax (PVDF)
500 mm	70	100
800 mm	65	95
1000 mm	60	90
1250 mm	55	85


MAIN APPLICATION SECTORS




GALVANIC
AND ELECTRONIC INDUSTRY



WATER
AND SLUDGE TREATMENT



CHEMICAL INDUSTRY

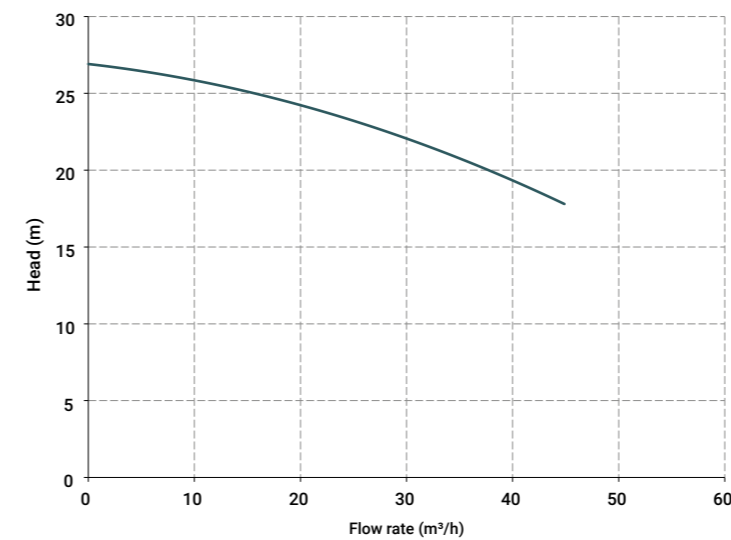

IM 160

Specifications and types

Suction fittings	2"1/2 f BSPP or DN 65 on request
Delivery fittings	2" m BSPP or DN 50 on request
Max. flow rate	55 m ³ /h
Max. head	32 m
Viscosity up to	500 cps
Standard open impeller	Ø 162 mm H 11 mm -10° *
Solids passing	Ø max 9 mm

* Special versions are available on request for the fluid pumped



STANDARD ELECTRIC MOTOR:

Kw	7.5
HP	10
Constructive form	B5
RPM	2900
Three-phase 400/690 V	-
50/60 Hz	-
2 poles	-
Efficiency class	IE3
Protection	IP55
Ambient temperature	-30°C + 45°C
Aluminium/Cast iron	-
ATEX	on request

STD COLUMN LENGTH PP WEIGHT* PVDF WEIGHT*

500 mm	31 Kg	33 Kg
800 mm	34 Kg	36 Kg
1000 mm	36 Kg	38 Kg
1250 mm	39 Kg	41 Kg

* The weights refer to the pump without the motor
NB: Special executions only on request with column length from min. 400 mm to max. 1400 mm

OPERATING TEMPERATURES**:

PP (with glass additive)	0°C to + 70°C
PVDF (with carbon additive)	-10°C to + 100°C

**Measurements should be taken with agitated water; temperatures may vary depending on the conditions of the system and/or the processed liquid

LENGTH Tmax (PP) Tmax (PVDF)

500 mm	70	100
800 mm	65	95
1000 mm	60	90
1250 mm	55	85


MAIN APPLICATION SECTORS

GALVANIC AND ELECTRONIC INDUSTRY

WATER AND SLUDGE TREATMENT

CHEMICAL INDUSTRY

MECHANICAL AND METALLURGIC INDUSTRY

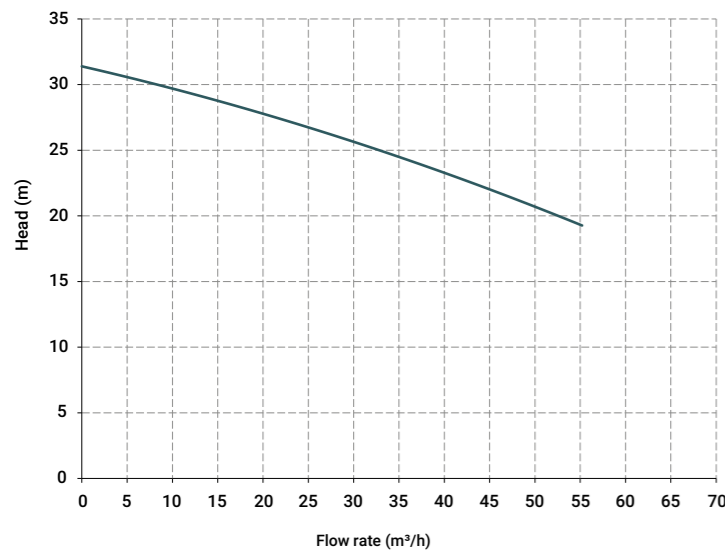

IM 180

Specifications and types

Suction fittings	2"1/2 f BSPP or DN 65 on request
Delivery fittings	2" m BSPP or DN 50 on request
Max. flow rate	75 m ³ /h
Max. head	38 m
Viscosity up to	500 cps
Standard open impeller	Ø 176 mm H 13 mm -10° *
Solids passing	Ø max 11 mm

* Special versions are available on request for the fluid pumped



STANDARD ELECTRIC MOTOR:

Kw	11
HP	15
Constructive form	B5
RPM	2900
Three-phase 400/690 V	-
50/60 Hz	-
2 poles	-
Efficiency class	IE3
Protection	IP55
Ambient temperature	-30°C + 45°C
Aluminium/Cast iron	-
ATEX	on request

STD COLUMN LENGTH PP WEIGHT* PVDF WEIGHT*

500 mm	31 Kg	33 Kg
800 mm	34 Kg	36 Kg
1000 mm	36 Kg	38 Kg
1250 mm	39 Kg	41 Kg

* The weights refer to the pump without the motor
NB: Special executions only on request with column length from min. 400 mm to max. 1400 mm

OPERATING TEMPERATURES**:

PP (with glass additive)	0°C to + 70°C
PVDF (with carbon additive)	-10°C to + 100°C

**Measurements should be taken with agitated water; temperatures may vary depending on the conditions of the system and/or the processed liquid

LENGTH Tmax (PP) Tmax (PVDF)

500 mm	70	100
800 mm	65	95
1000 mm	60	90
1250 mm	55	85


MAIN APPLICATION SECTORS

GALVANIC AND ELECTRONIC INDUSTRY

WATER AND SLUDGE TREATMENT

CHEMICAL INDUSTRY

MECHANICAL AND METALLURGIC INDUSTRY

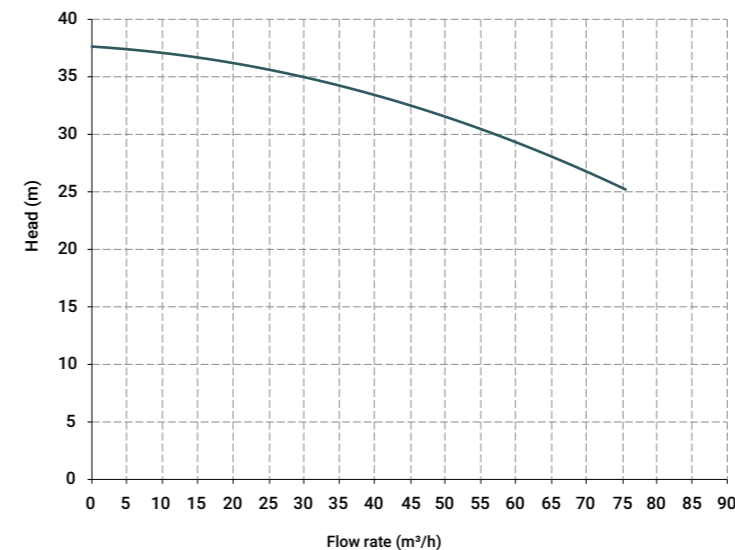

IM 200

Specifications and types

Suction fittings	DN 102 (threadable on request)
Delivery fittings	3" m BSPP or DN 80 on request
Max. flow rate	170 m ³ /h
Max. head	46 m
Viscosity up to	500 cps
Standard open impeller	Ø 200 mm H 18.4 mm *
Solids passing	Ø max 15 mm
Available column length (mm)	600 / 800 / 1000

*Special versions are available on request for the fluid pumped

STANDARD ELECTRIC MOTOR:

Kw	15-18.5
HP	20.8-25
Constructive form	B5
RPM	2900
Three-phase 400/690 V	-
50/60 Hz	-
2 poles	-
Efficiency class	IE3
Protection	IP55
Ambient temperature	-30°C + 45°C
Aluminium/Cast iron	on request
ATEX	on request


STD COLUMN LENGTH	PP WEIGHT*
600 mm	62 kg
800 mm	65 kg
1000 mm	67 kg

OPERATING TEMPERATURES**:

PP (with glass additive)	0°C to + 70°C
---------------------------------	---------------


**Measurements should be taken with agitated water; temperatures may vary depending on the conditions of the system and/or the processed liquid

LENGTH	Tmax (PP)	Tmax (PVDF)
500 mm	70	100
800 mm	65	95
1000 mm	60	90
1250 mm	55	85

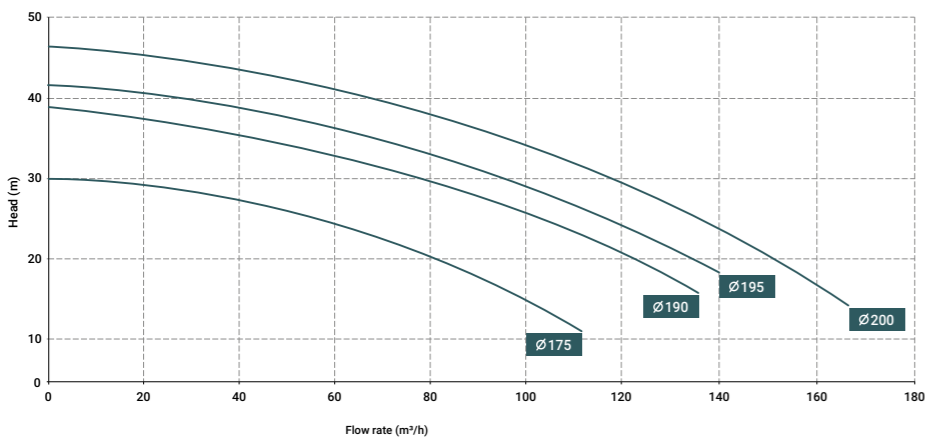


MAIN APPLICATION SECTORS

- GALVANIC AND ELECTRONIC INDUSTRY
- WATER AND SLUDGE TREATMENT
- CHEMICAL INDUSTRY

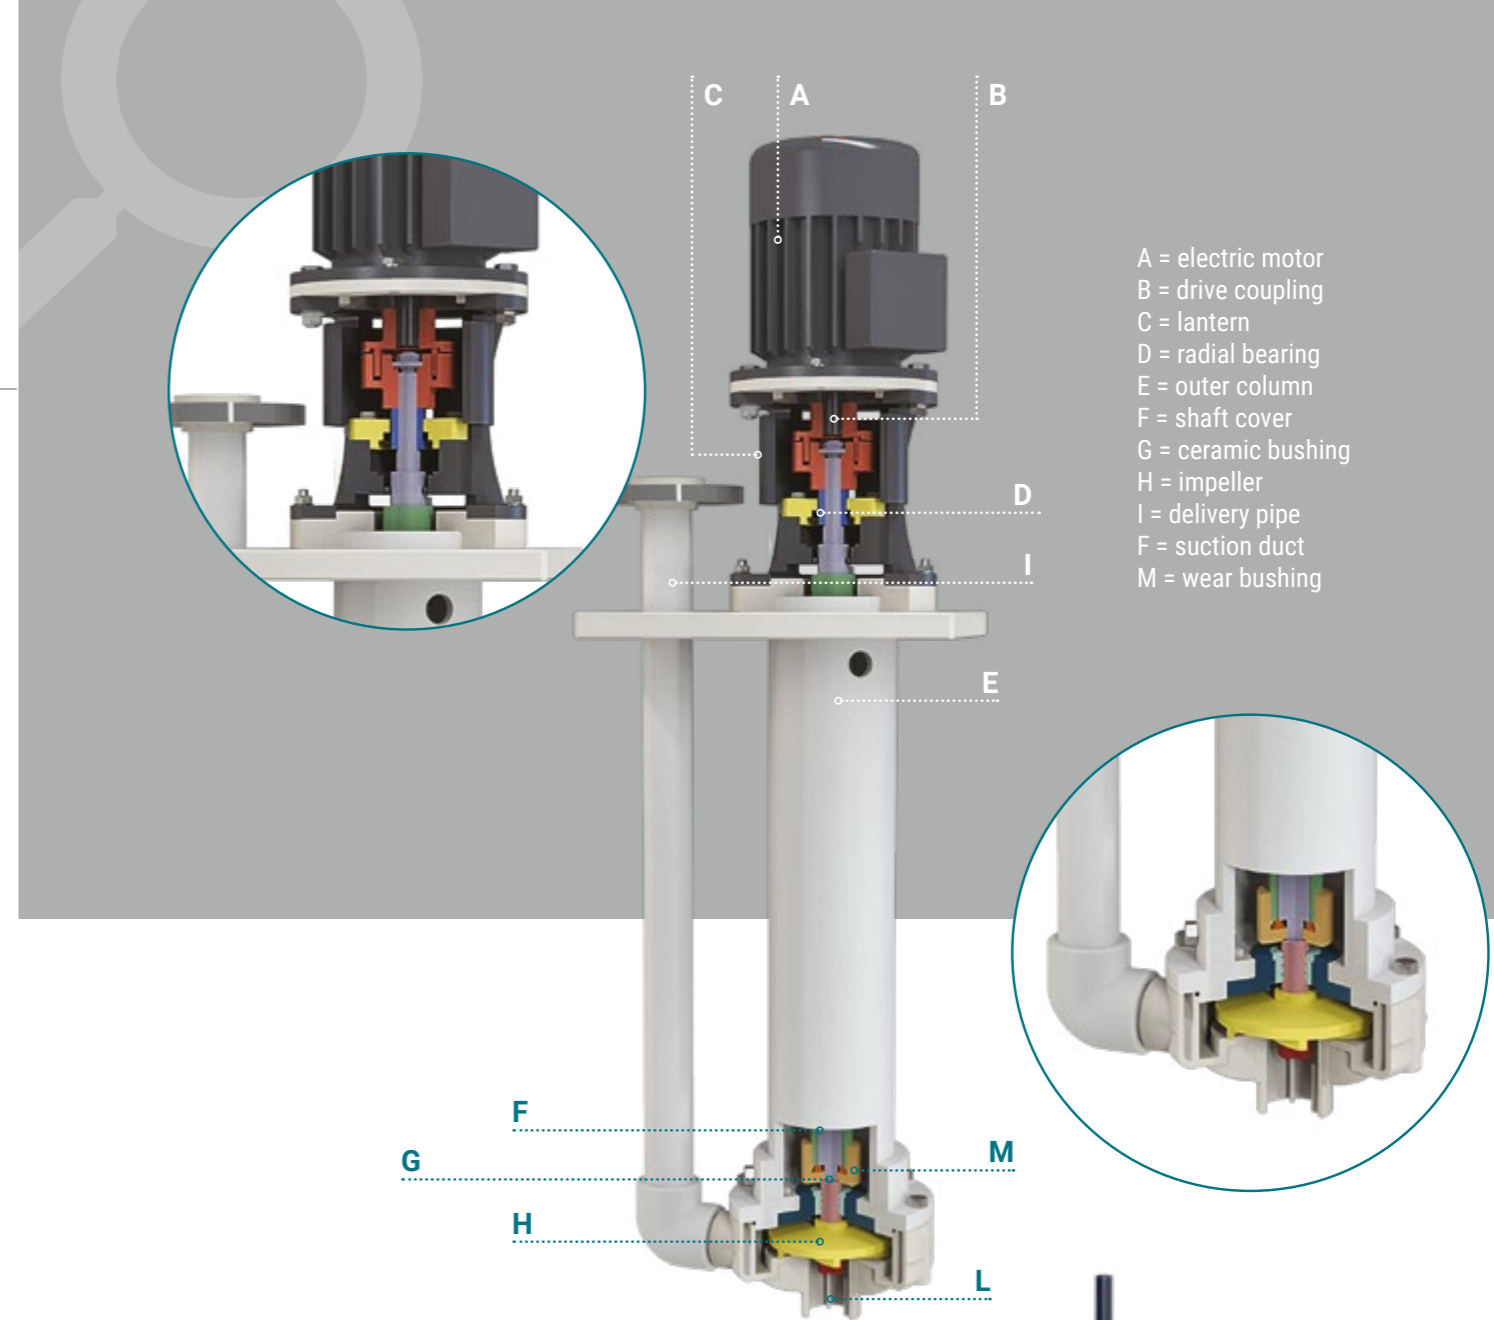

Pump type	Motor power
IM 80	0.37 Kw - 0.5 HP
IM 90	0.55 Kw - 0.75 HP
IM 95	0.75 Kw - 1 HP
IM 110	1.1 Kw - 1.5 HP
IM 120	1.5 Kw - 2 HP
IM 130	2.2 Kw - 3 HP
IM 140	3 Kw - 4 HP
IM 150	4 Kw - 5.5 HP
IM 155	5.5 Kw - 7.5 HP
IM 160	7.5 Kw - 10 HP
IM 180	11 Kw - 15 HP
IM 200	18.5 Kw - 25 HP



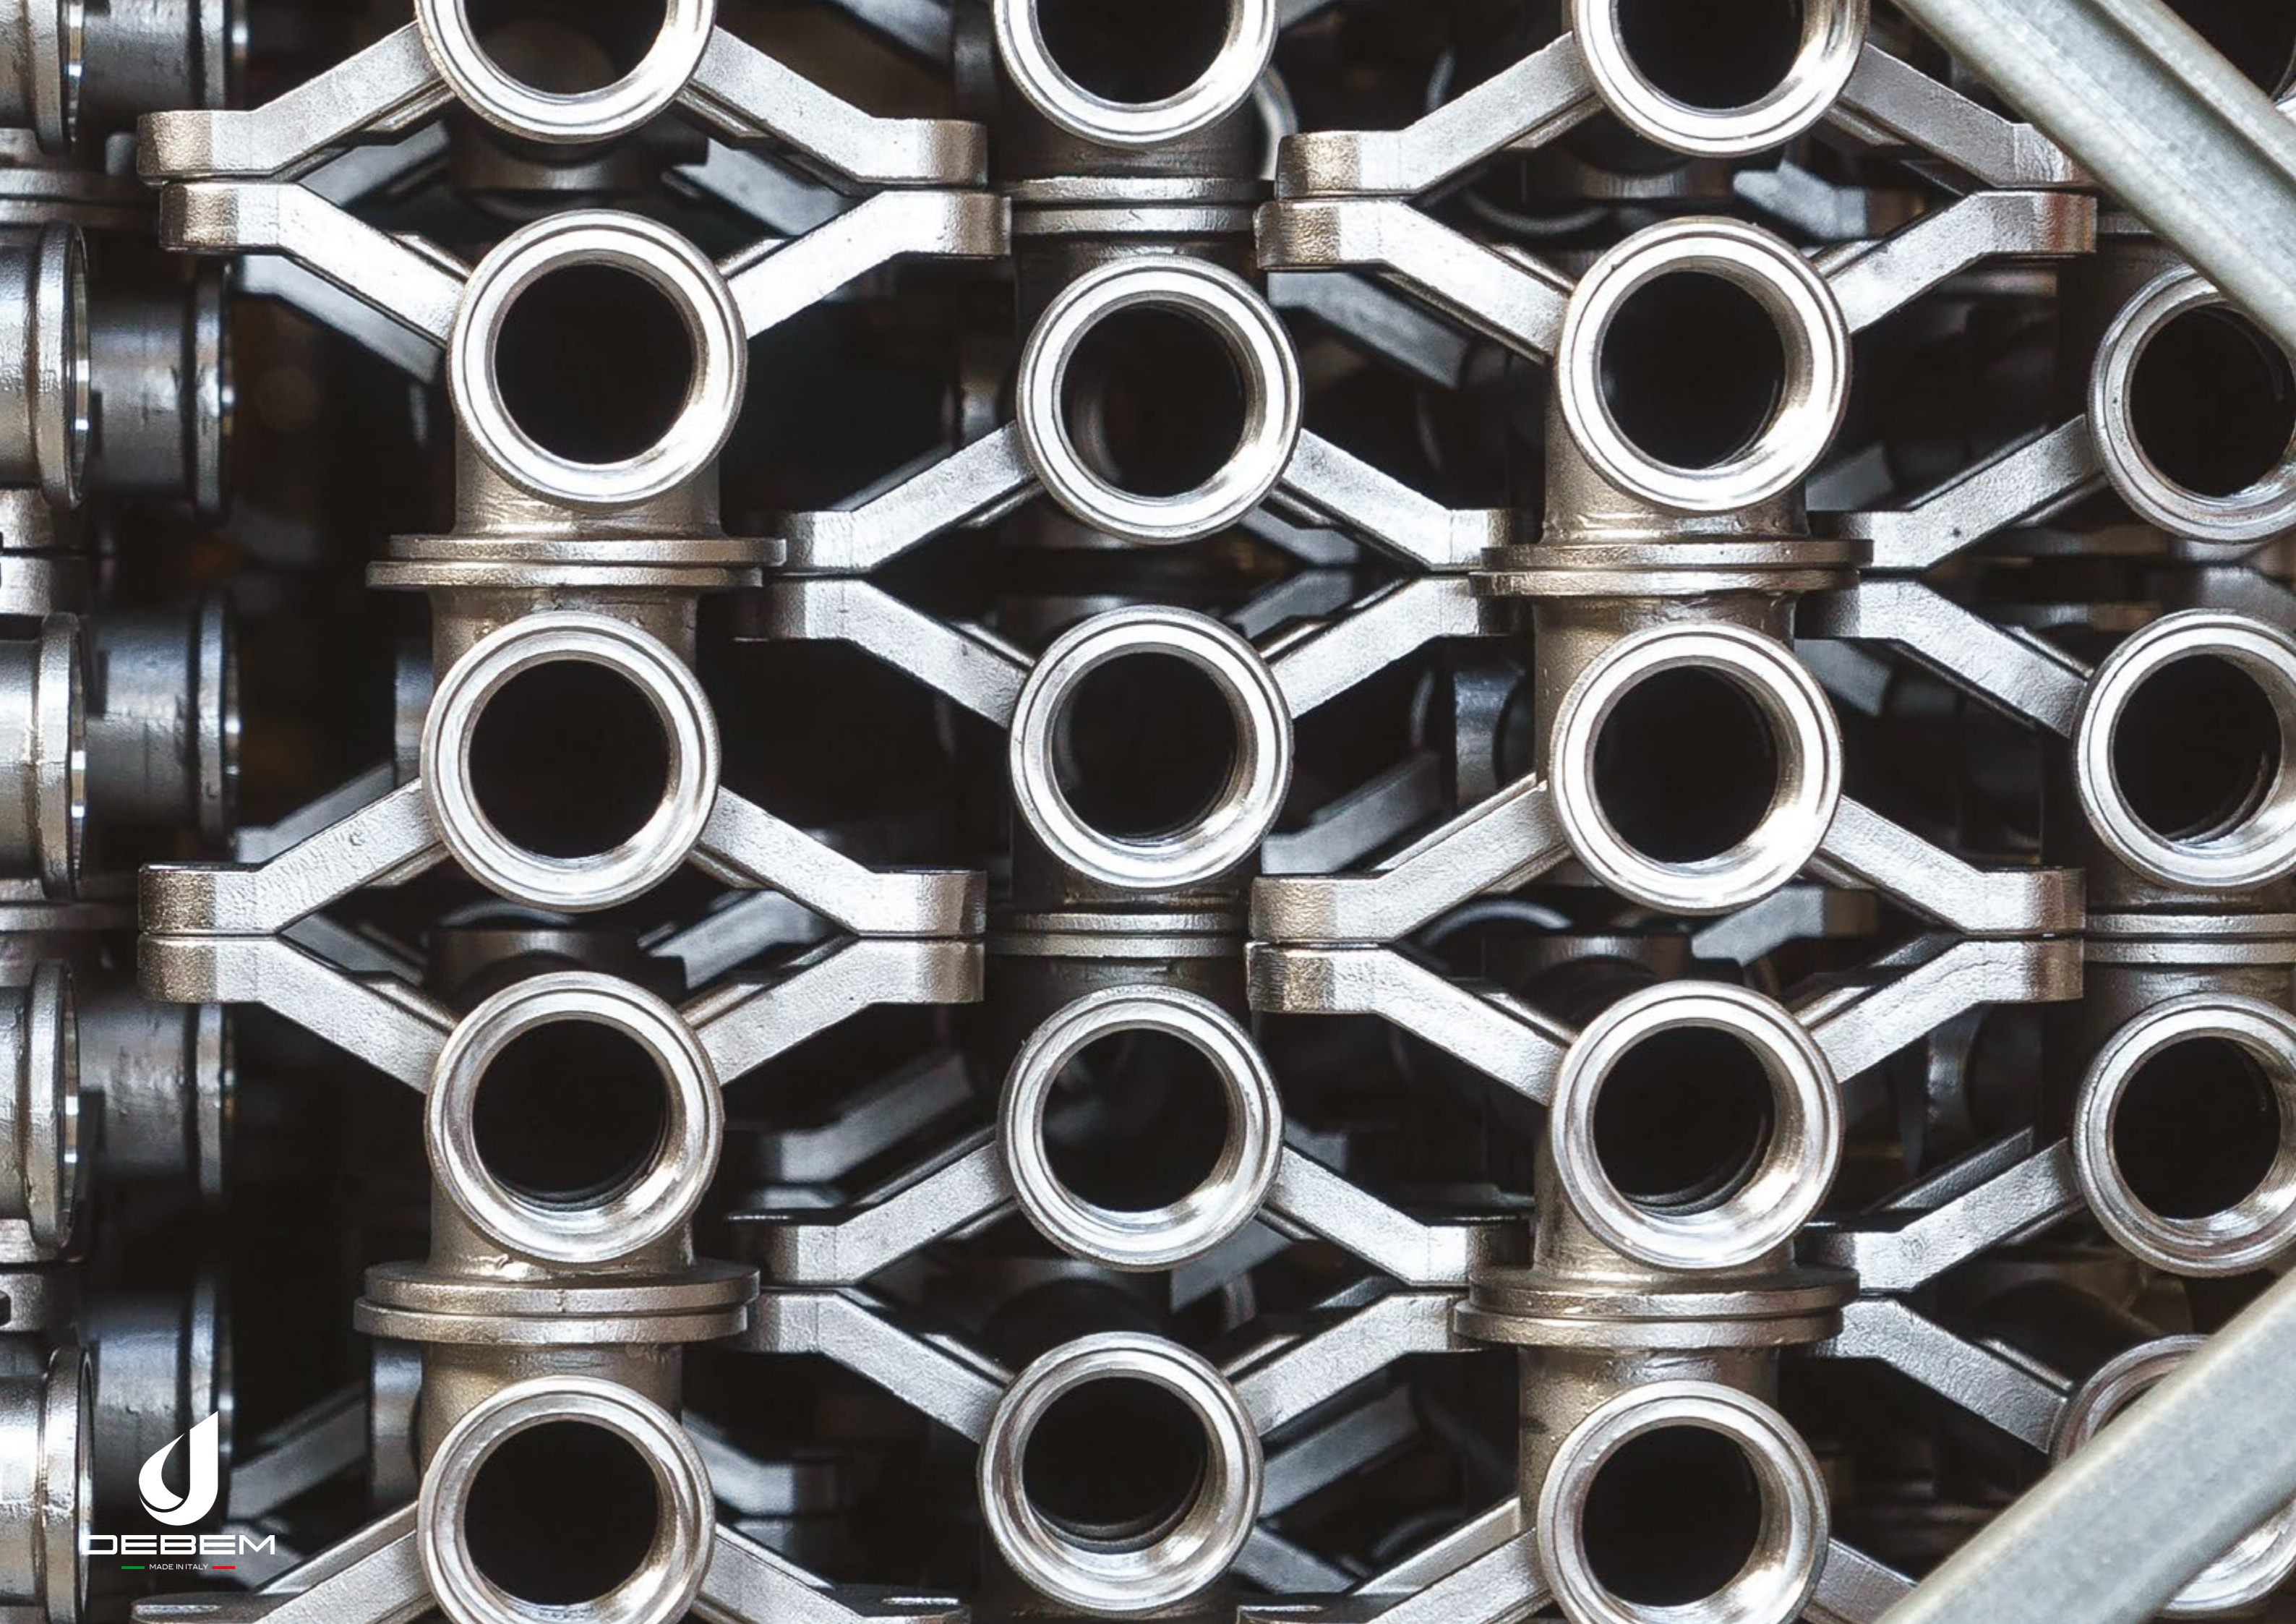

The drum transfer pumps consist of a dip tube, at the end of which the open impeller is fitted. It is secured to the drive shaft, connected to the pump with a ring nut. The operation consists of an impeller integrated with the shaft, connected to the electric or pneumatic motor with a coupling joint.

The transfer pumps must be used exclusively vertically and with the pump immersed in the fluid. Dry-running

or the presence of air bubbles could damage the shaft guide internal bushing. **These portable drum transfer pumps are ideally suited for pumping corrosive fluids and work by being immersed in the liquid.** Their construction shape has been designed to collect any product spillages in the drum.



- Product designed and constructed in Italy
- Portable
- Suitable for corrosive fluids
- Possibility of adjusting the flow rate (in the version with pneumatic motor)
- No mechanical seals
- Easy disassembly
- Viscosity up to 900 cps
- Max flow rate 90 l/minute

TR PUMPS CODES ENCODING


ex. TRPH1200
TR PP, Hastelloy shaft, dip tube length 1200 mm

TR	P	H	1200
PUMP MODEL	PUMP MATERIAL	SHAFT MATERIAL	TUBE LENGTH
TR - Drum transfer	P - Polypropylene F - PVDF A - AISI 316	H - Hastelloy A - AISI 316	0900 - 900 mm 1200 - 1200 mm

TRP - Polypropylene Casing

Dip tube	Ø 42 mm
Hose holder	Ø 25 mm
Max Operating temp	65° C
Total weight in Kg*	1.4 for length of 900 mm / 1.7 for length of 1200 mm
Mat. Dip tube	Polypropylene
Mat. Shaft	HASTELLOY or AISI 316
Mat. Impeller	ECTFE
Mat. Suction outlet	Polypropylene
Mat. Seal gasket in contact with the fluid - MIM	Viton®
Length mm	900 or 1200
Max Operating temp	3°C to 65°C


*The weight refers to the pump without the motor.

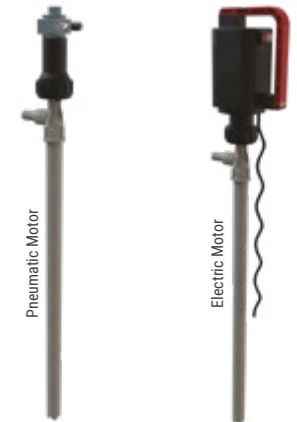

TRF - PVDF casing

Dip tube	40 mm
Hose holder	Ø 25 mm
Max Operating temp	95° C
Total weight in Kg*	1.6 for length of 900 mm / 1.9 for length of 1200 mm
Mat. Dip tube	PVDF
Mat. Shaft	HASTELLOY
Mat. Impeller	ECTFE
Mat. Suction outlet	ECTFE
Mat. Seal gasket in contact with the fluid - MIM	Viton®
Length mm	900 or 1200
Max Operating temp	3°C to 95°C


*The weight refers to the pump without the motor.

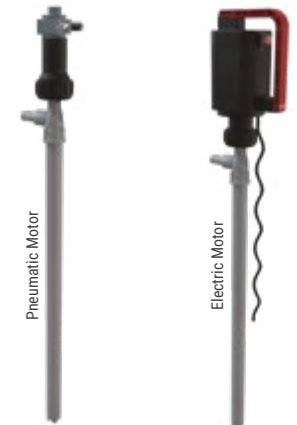

TRA - AISI 316 casing

Dip tube	Ø 42.5 mm
Hose holder	Ø 25 mm
Max Operating temp	95° C
Total weight in Kg*	4.3 for length of 900 mm / 5.3 for length of 1200 mm
Mat. Dip tube	AISI 316
Mat. Shaft	AISI 316
Mat. Impeller	ECTFE
Mat. Suction outlet	ECTFE
Mat. Seal gasket in contact with the fluid - MIM	Viton®
Length mm	900 or 1200
Max Operating temp	3°C to 95°C


*The weight refers to the pump without the motor.

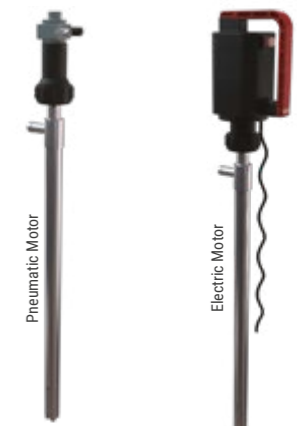

TR

TR-EL SERIES - Electric motor

Drum transfer pumps with electric motor at 800 Watt equipped with open impeller that allows the continuous pumping of clean corrosive fluids with apparent viscosity up to 900 cps.

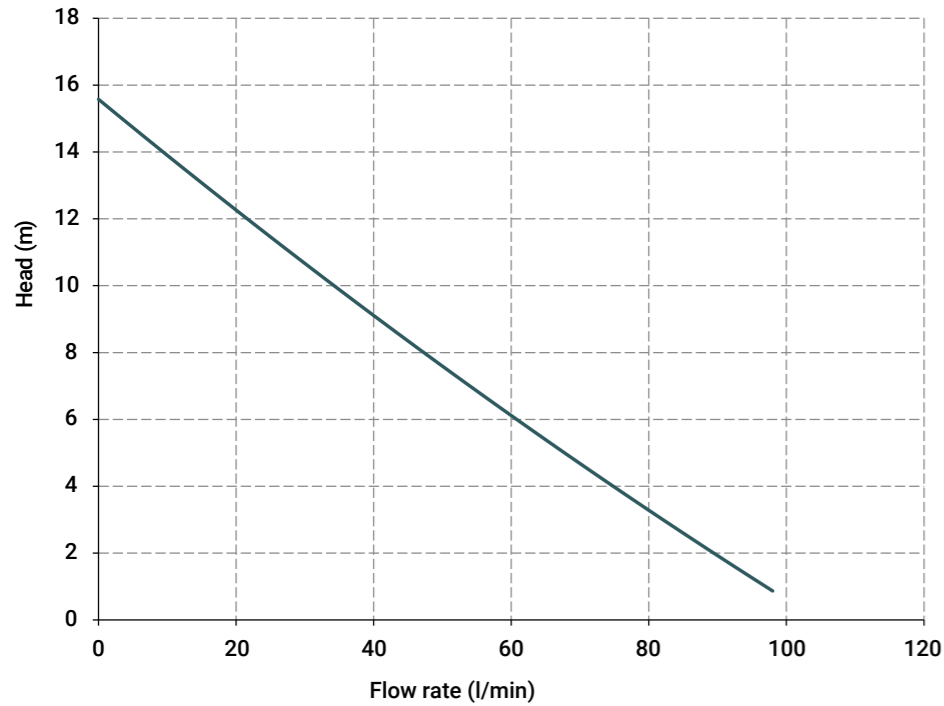


TECHNICAL SPECIFICATIONS ELECTRIC MOTORS

Power	800 Watt
Voltage	230 V single-phase (50/60 HZ)
RPM	10500
Class	F
Flow rate	90 l/min
Viscosity	900 cps
Density	1.6 g/cm ³
Weight in Kg	3.8
ATEX motor	on request

(NB: The electrical cable is supplied without plug)
Contact the sales office for information on the ATEX motor

TR-PM SERIES - Pneumatic motor


Drum transfer pumps with pneumatic motor equipped with open impeller that allows the continuous pumping of clean corrosive fluids with apparent viscosity up to 600 cps. The pump allows the flow rate adjustment.

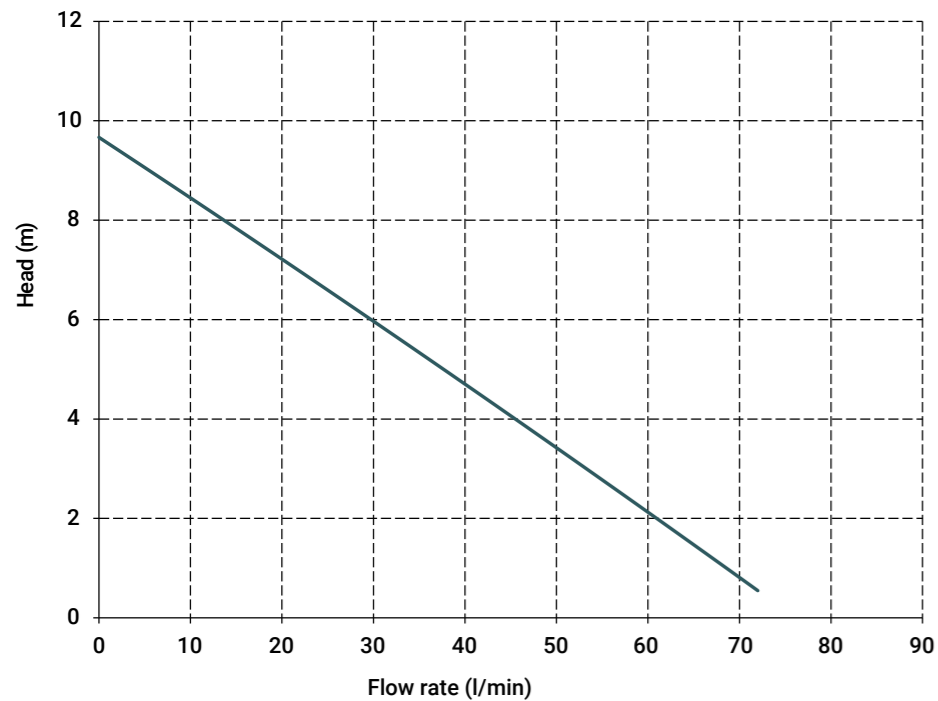

TECHNICAL SPECIFICATIONS PNEUMATIC MOTORS

Pneumatic motor	Standard
Power	0.42 HP (300 Watt)
Flow rate	70 l/min
Viscosity	600 cps
Density	1.2 g/cm ³
Weight in Kg	1.1
ATEX motor	on request

Contact the sales office for information on the ATEX motor

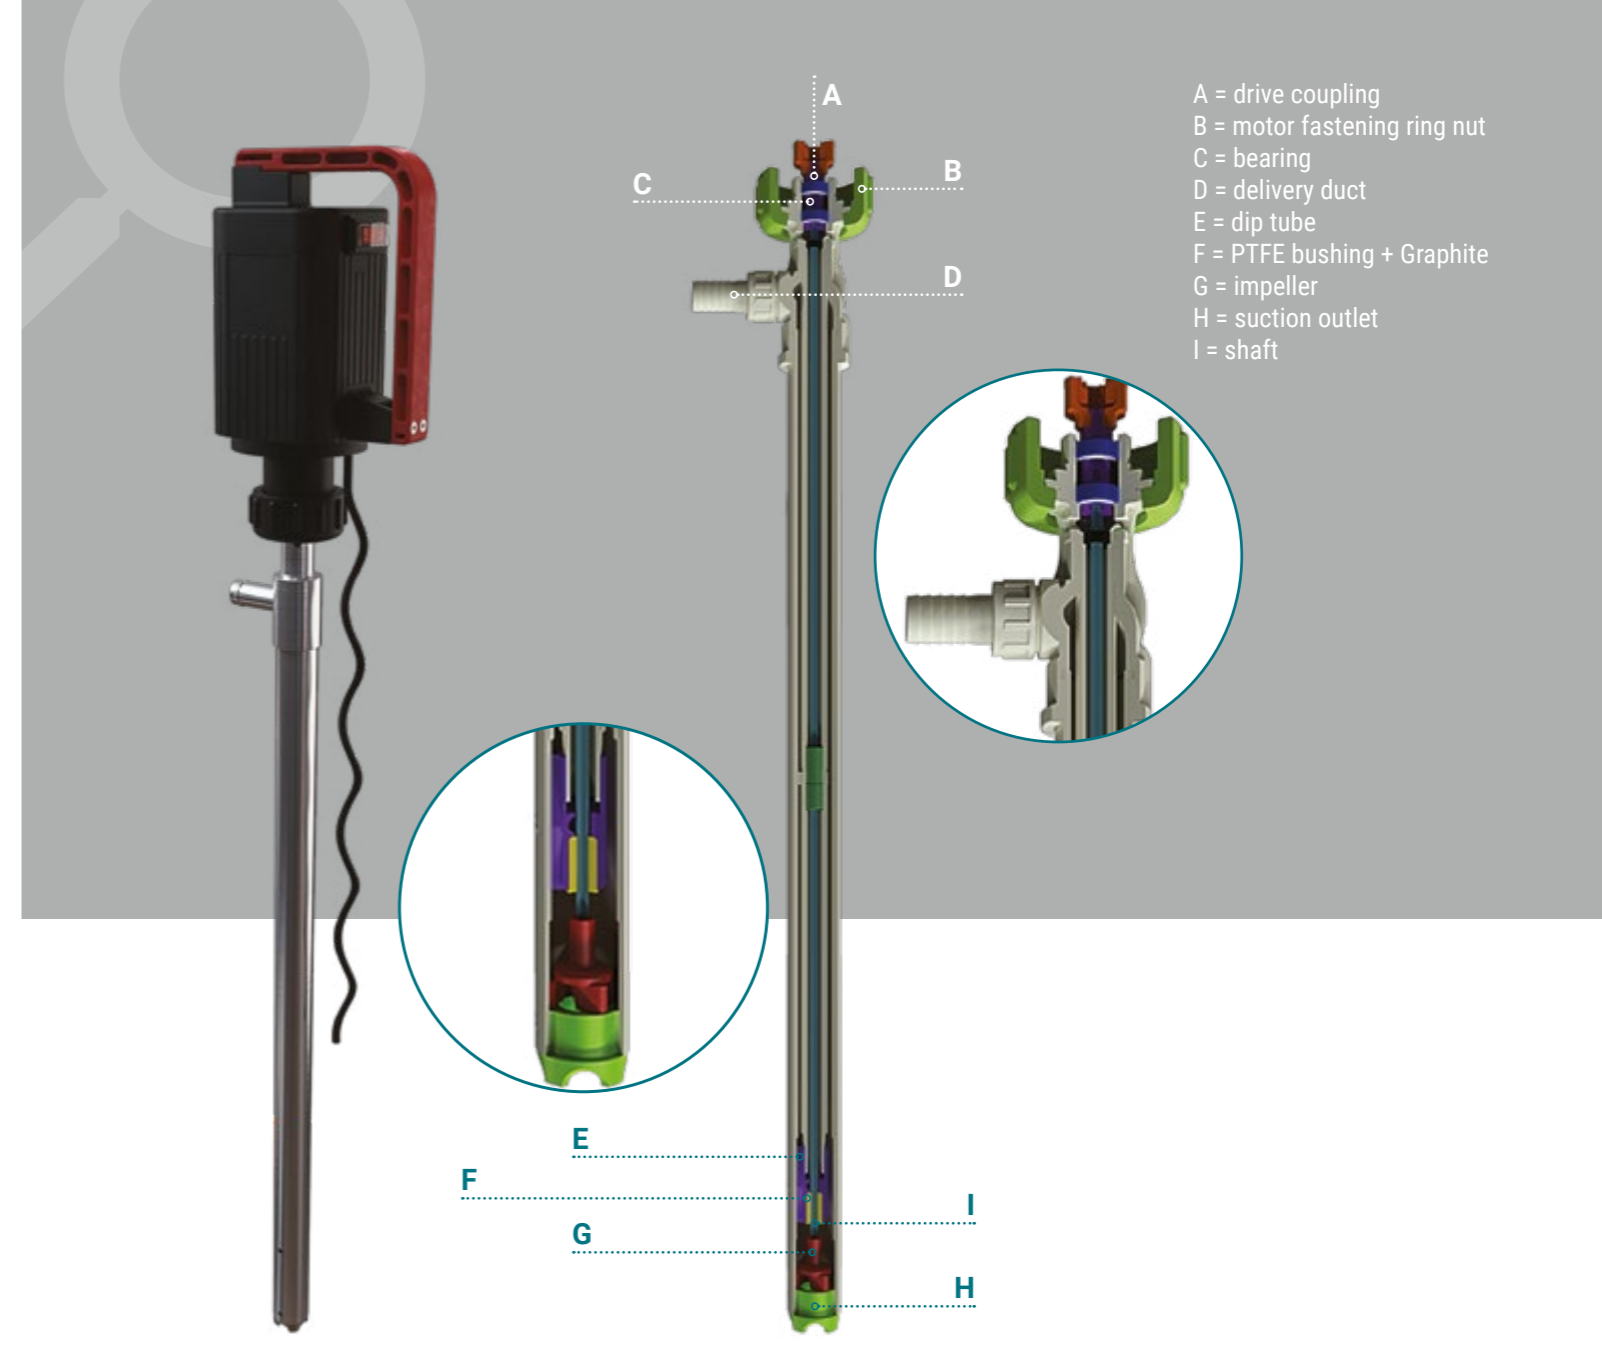

- A = drive coupling
- B = motor fastening ring nut
- C = bearing
- D = delivery duct
- E = dip tube
- F = PTFE bushing + Graphite
- G = impeller
- H = suction outlet
- I = shaft

MAIN APPLICATION SECTORS



	AUTOMOTIVE	CHEMICAL INDUSTRY	OIL & GAS	GALVANIC AND ELECTRONIC INDUSTRY
TRA - ELECTRIC MOTOR	●	●	●	
TRA - PNEUMATIC MOTOR	●	●	●	
TRF - ELECTRIC MOTOR	●	●	●	●
TRF - PNEUMATIC MOTOR	●	●	●	●
TRP - ELECTRIC MOTOR	●	●	●	●
TRP - PNEUMATIC MOTOR	●	●	●	●

Accessories


Debem offers a wide range of accessories for all the types of pumps in its catalogue. Accessories from other manufacturers or designed and built directly by

the company, which are the result of our technical experience and specific research in pump applications.

Foot valve

BOXER FAMILY

Check valves are designed to be installed vertically at the end of the suction pipes of centrifugal and pneumatic pumps. They function as check valves that prevent the suction hose from emptying so that the pumps remain always primed. Sizes available: 1", 1" ¼, 1" ½, 2", 3". Construction material: PP and PVDF.

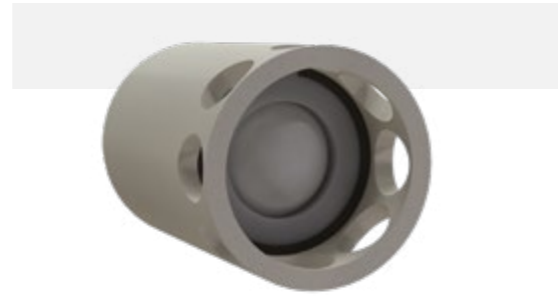

Truck for Boxer pumps

BOXER FAMILY

Equipment used to move the pump. The pump is blocked with the fixing holes.



Cycle counter

BOXER FAMILY

Device that is installed on the pneumatic circuit of diaphragm pumps. It measures the number of strokes performed by the diaphragms and therefore the number of cycles. This device therefore allows different types of control to be activated, such as the number of litres of liquid delivered by the pump depending on its displacement, and the control of the remote operation of the pump itself. *Attention: the device must be connected to a PLC or an external source for reading and monitoring data. The remote operation of the pump is subject to the use of a solenoid valve, again controlled by a PLC or other equipment.*



Pressure booster

BOXER FAMILY


The Debem pressure booster can be used when the air line does not allow sufficient pressure to be reached to supply the pump properly. By using this accessory, the mains pressure will be doubled (e.g. 3 bar mains pressure will become 6 bar), so that the pump can fulfil the required operating conditions. *Attention: under no circumstances should the use of the pressure booster cause the pump to exceed the operating pressure of 8 bar.*



Reinforcement rings

BOXER FAMILY

Steel rings press-fitted on the manifolds of the PP and PVDF pumps prevent them from breaking or being damaged when connecting the pump to the circuit.

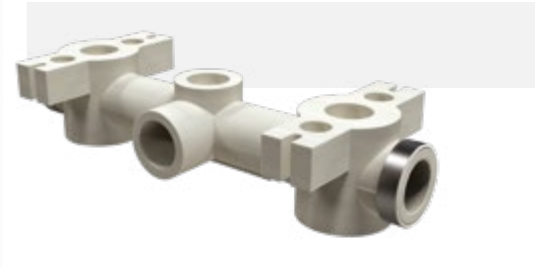

Batch controller

BOXER FAMILY

Mechanical batch controller with 5-digit display and start/stop button. Pneumatically driven it doesn't require any electrical connection. Designed to control Debem's air-operated double diaphragm pumps.



Air regulation kit

BOXER FAMILY

The kit is designed to regulate and/or set the pressure of the compressed air. They consist of: compressed air reduction filter, fixing bracket, reducer, pressure gauge, Elaston hose (5 m), tap and fittings.



Microvalves

BOXER FAMILY

These valves are used to manually regulate the pump air supply flow rate.



Anti-vibration feet kit

BOXER FAMILY

These help to decrease the vibrations produced by the pump during its operation.



Three-way valves

BOXER FAMILY

With electric or pneumatic drive. They are used to remotely switch the pump on or off.



Valves, fittings and pipes

FAMILY BOXER - CUBIC - MB - DM - IM - TR

Valves and fittings in polypropylene, PVC and stainless steel. High-resistance clamps for spiral hoses. Reinforced hoses made with food-grade PVC with metal reinforcement, designed to be installed on the delivery/suction side of pumps with hose holders and locking clamps.


Hose made with polyethylene, a high density material, with a spiral, covered in rubber, to be applied on the delivery/suction side of the pump. Flexible and crush-proof the hose is supplied complete with swivel fittings and plate type clamps. High chemical resistance.



Flange kit

FAMILY BOXER - MB - DM - IM

DIN flange connections (ANSI available on request), available in the following materials: Polypropylene, PVDF, Aluminium and AISI 316".

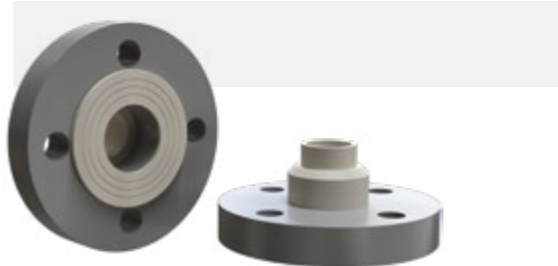

Quick-release couplings

BOXER FAMILY

Designed for the chemical sector, they provide a high level of resistance and can be used with reinforced hoses. Max operating pressure 13 bar.



IM Filter

IM FAMILY

Filters the suction fluid. For IM series pumps. Construction material polypropylene and PVDF.



Dispensers

TR FAMILY

Built with Polypropylene, aluminium, stainless steel or PVDF. They include a lever used to control the delivery.



Flow meters

TR FAMILY

The flow meters are installed exclusively on drum transfer pumps and are used to measure the pump's instantaneous flow rate, or the total number of litres delivered. They include a display for the reading. They are built in polypropylene or PVDF.



Dip tube filter

TR FAMILY

Filters the suction fluid. For TR series drum transfer pumps. Construction material polypropylene and stainless steel.




Pump protection basket strainer

Thanks to the large total passage surface of the basket, these filters are ideally suited to be installed on the suction fitting of the pumps, to protect them from suspended solids, filaments, algae and foreign bodies, without causing excessive drops in capacity. It is an ideal accessory for the chemical industry, water treatment, fish farming, galvanic industry, leather and textile industry, paper industry, graphic industry and

many more. They are made of plastic (PP or PVDF). There are also no metal parts. The basket can be easily inspected and removed; the expected operating pressure is 1 bar. Different types of attachments are available: 1" 1/2 f, 2" f, 2" 1/2 f, 3" f.




- Product designed and constructed in Italy
- No metal parts
- Basket is easy to inspect and remove
- Built in PP and PVDF
- Operating pressure 1 bar

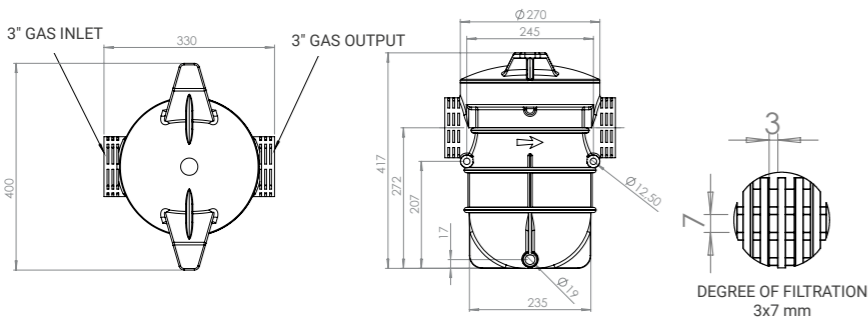

MAIN APPLICATION SECTORS

GRAPHIC INDUSTRY	WATER AND SLUDGE TREATMENT	CHEMICAL INDUSTRY
PACKING, GLUE, PAPER AND PAPER MILLS	GALVANIC AND ELECTRONIC INDUSTRY	TEXTILE AND LEATHER INDUSTRY

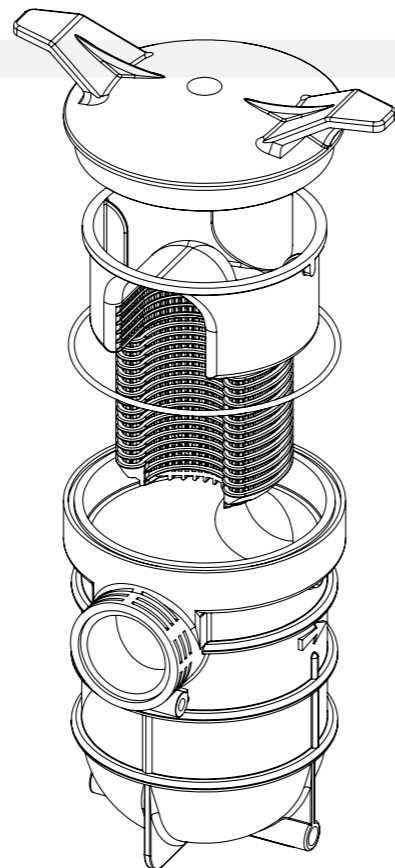

Mixers: E/EH/F/FR/H/J/RV

Compact mixers designed for a wide range of applications, they can be used regardless of the shape and size of the basin. Fields of use: water treatment

plants, biogas plants, production of liquid feedstuffs, transport vehicles, etc.

- Built in PP, PVDF, AISI 316
- Great versatility

MAIN APPLICATION SECTORS

OIL & GAS	WATER AND SLUDGE TREATMENT	AUTOMOTIVE
-----------	----------------------------	------------



Peristaltic pumps

Peristaltic pumps operate with a "flowing pressure" exerted on a flexible hose with rollers, rotating parallel to an axis, and supported by a rollers holder. Peristaltic pumps are an ideal solution for many sectors such as water treatment, the chemical industry, the food

industry, cosmetics, mining, the ceramic industry, the construction industry and the paper industry.

MAIN APPLICATION SECTORS

PACKING, GLUE, PAPER AND PAPER MILLS	WATER AND SLUDGE TREATMENT	CHEMICAL INDUSTRY
PHARMACEUTICAL COSMETIC AND TRICHOLOGICAL INDUSTRY	CERAMIC, STONE, MARBLE, GLASS AND MINING INDUSTRY	



Web and contacts

Visit the site to learn about all the products and their features.



The new mobile responsive website is available in English, German, French, Italian and Spanish.

www.debem.com



FOLLOW US




CALL US

+39 0331 074034



SEND US AN EMAIL

info@debem.it

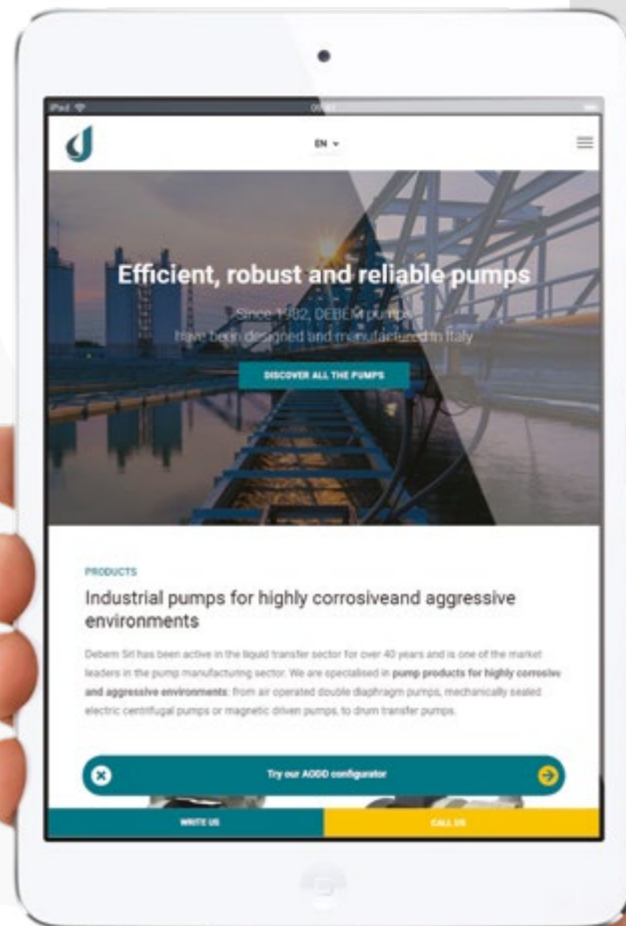



Debem srl
Via Del Bosco, 41 - 21052 Busto Arsizio (VA) - Italy
www.debem.com