


CHEMICAL PUMPS SINCE 1992



ATEX PUMPS PP/PVDF

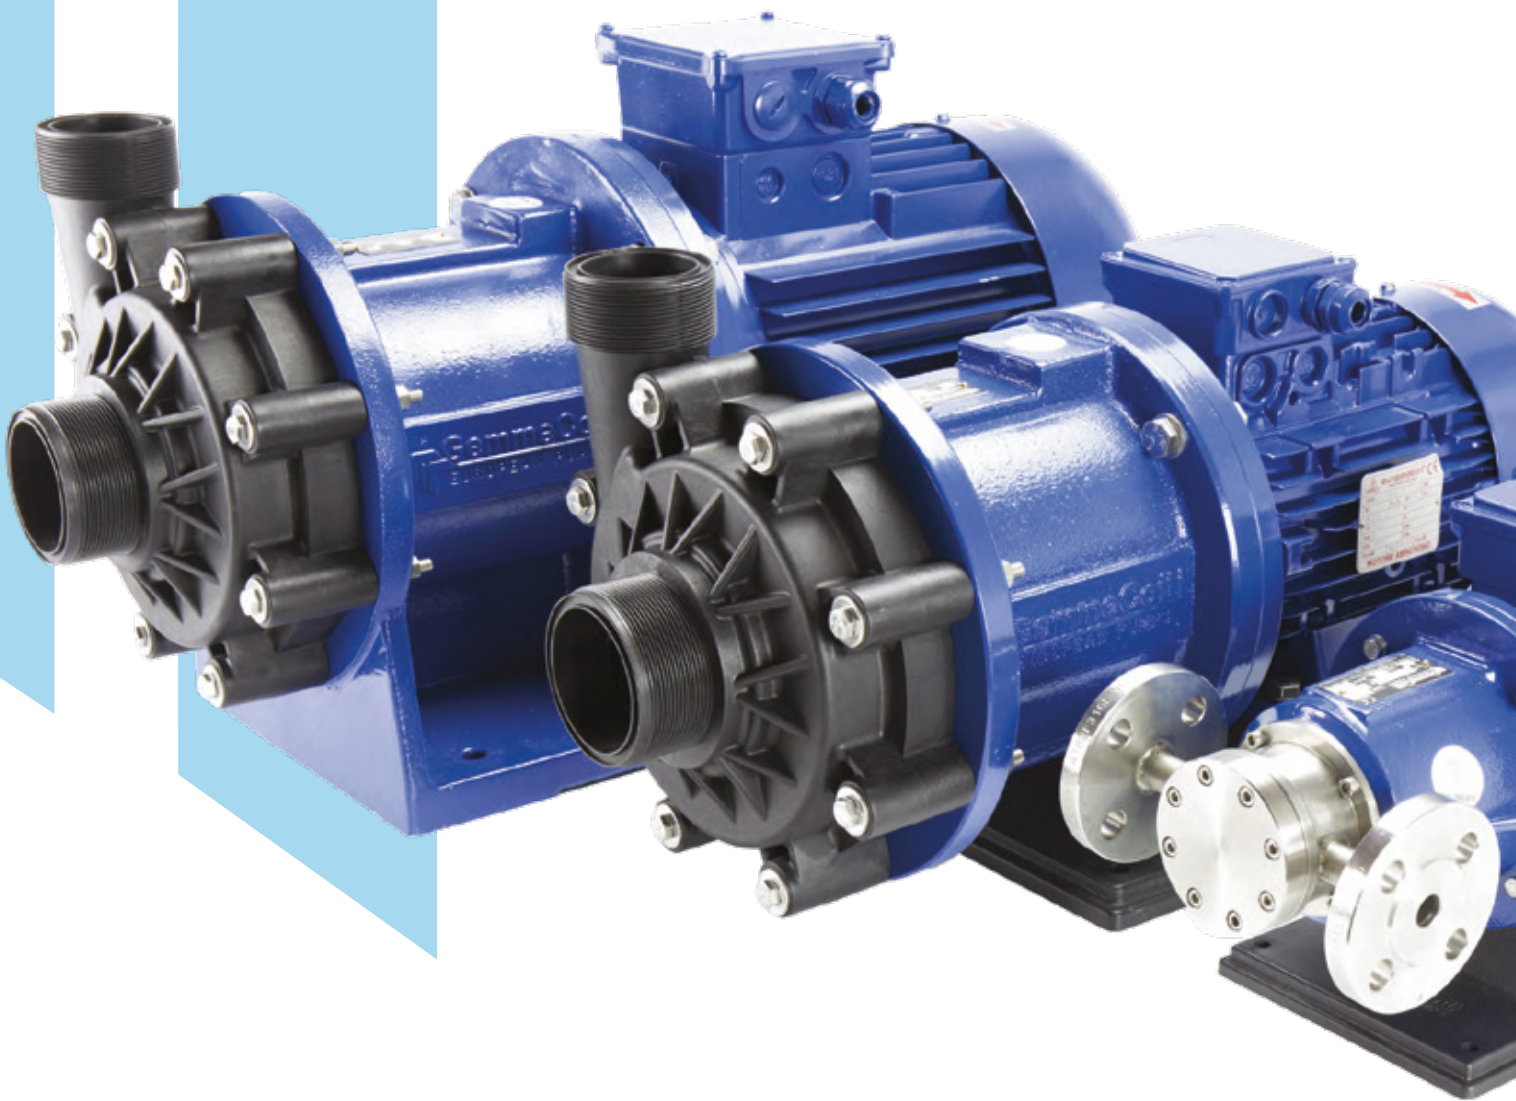

For applications in potentially explosive atmospheres GemmeCotti offers ATEX certified pumps.

ATEX pumps made of thermoplastic material polypropylene (PP) or PVDF are suitable to be used in potentially explosive atmospheres classified zone 2 II 3G c Tx.

All our ATEX pumps comply with the technical and safety requirements of ATEX Directive 2014/34/EU.

Pump model EM-C PP/PVDF - only for ATEX zone 2
(See pump model HTM PP/PVDF page 12)



Pump model EM-T PP/PVDF - only for ATEX zone 2
(See pump model HTT page 28)



Pump model EM-P PP/PVDF - only for ATEX zone 2
(See pump model HPP/HPF page 36)



Pump model EM-T SP - only for ATEX zone 2
(See pump model HTT- SP page 30)



Pump model EM-CO - only for ATEX zone 2
(See pump model HCO page 42)





THERMOPLASTIC MAG-DRIVE ROTARY VANE PUMPS



SYSTEM PRESSURE

5 bar.

STANDARD

- High torque magnetic coupling.
- Direct starting motor.

OPTIONAL

- Flanges available (DIN or ANSI).
- Dry-running protection device.
- Baseplate.
- Available in ATEX version for zone 2 II3G (pump mod. EM-P PP/PVDF).

MAIN FEATURES

Mag drive rotary vane pumps series HPP-HPF are made of thermoplastic materials (PP/PVDF) and are suitable for corrosive liquids, alkalis, toxic, noxious and carcinogenic fluids. Thanks to the innovative mag drive system, pumps model HPP-HPF reduce the risks of leakage and the maintenance costs. HPP-HPF pumps are useful for low flow and high head applications such as Pilot Plants and Sampling.

MATERIALS AVAILABLE

- PP, PVDF.
- Materials in contact with the liquid: casing, end cover, internal magnet and rear casing: PP/PVDF; o-ring: EPDM (standard for PP pumps); VITON (standard for PVDF pumps).
- Graphite Stator.
- Rotor shaft: PVDF.


PERFORMANCES

Max flow 1000 l/h. Max pressure 5 bar.

TEMPERATURE

PP: max 70°C - PVDF: max 90°C.


PERFORMANCE CURVES 50HZ - 1450 RPM

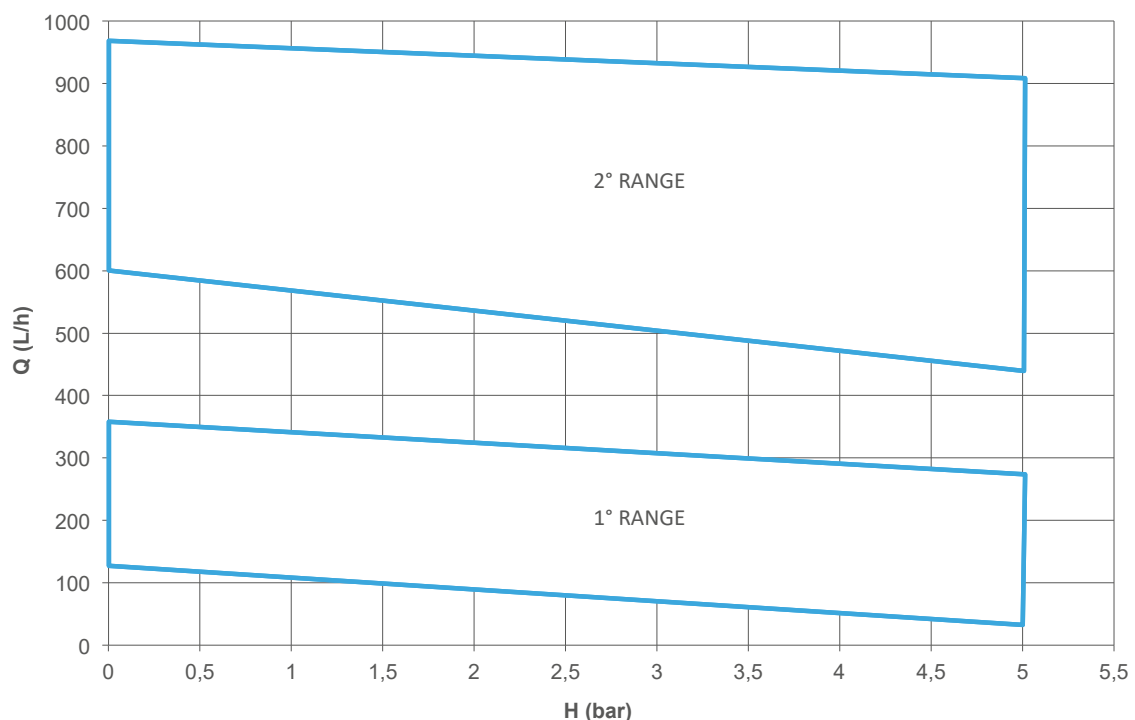


HPP/HPF TECHNICAL DATA

PUMP SIZE	MATERIAL	Q MAX		H MAX		SUCTION CONNECTION	DISCHARGE CONNECTION	PUMP WEIGHT (KG)		SUITABLE MOTOR POWER (KW) - 1450 rpm	MOTOR FLANGE AND FRAME
		50HZ (l/h)	60HZ (usgpm)	50HZ (bar)	60HZ (PSI)			PP	PVDF		
HPP/HPF 100 1R	PP- PVDF	120	0.66	5	72	3/8" FEMALE	3/8" FEMALE	2.9	3.2	0,37	71 - B3/B5
HPP/HPF 200 1R	PP- PVDF	200	1.1	5	72	3/8" FEMALE	3/8" FEMALE	2.9	3.2	0,37	71 - B3/B5
HPP/HPF 300 1R	PP- PVDF	290	1.5	5	72	3/8" FEMALE	3/8" FEMALE	2.9	3.2	0,37	71 - B3/B5
HPP/HPF 400 1R	PP- PVDF	360	1.85	5	72	3/8" FEMALE	3/8" FEMALE	2.9	3.2	0,37	71 - B3/B5
HPP/HPF 600 2R	PP- PVDF	600	2.5	5	72	1/2" FEMALE	1/2" FEMALE	7	7.5	1,5	90 - B3/B5
HPP/HPF 800 2R	PP- PVDF	800	3	5	72	1/2" FEMALE	1/2" FEMALE	7	7.5	1,5	90 - B3/B5
HPP/HPF 1000 2R	PP- PVDF	990	3.5	5	72	1/2" FEMALE	1/2" FEMALE	7	7.5	1,5	90 - B3/B5

HPP-HPF 1° RANGE DIMENSIONS

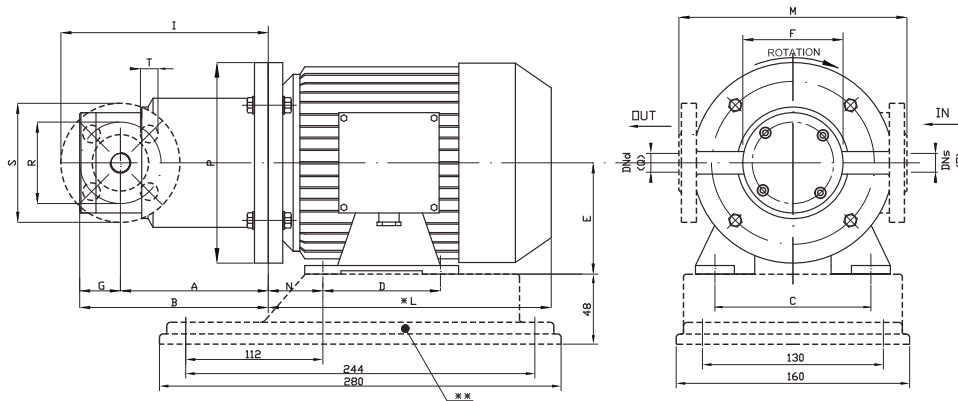

HPP-HPF 2° RANGE DIMENSIONS

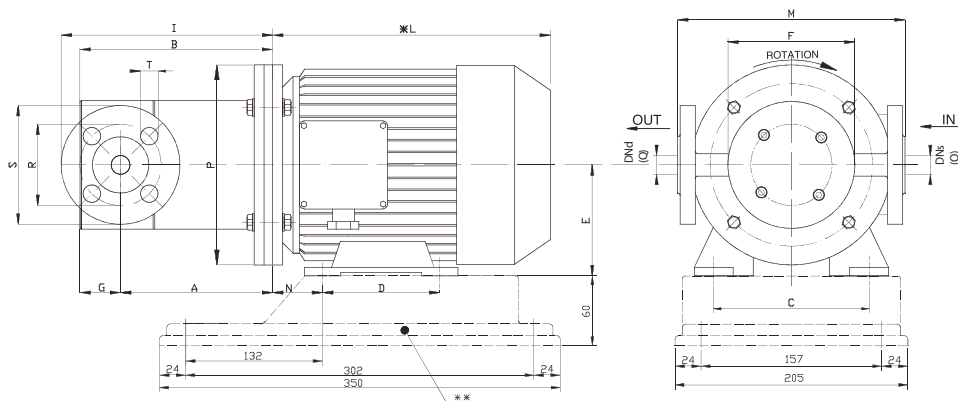

PUMP TYPE	FLANGES DIMENSIONS - mm - DN 15 PN 16				
	R	S	T	DNs	DNd
HPP-HPF 1° RANGE	65	95	14	15	15

PUMP TYPE	FLANGES DIMENSIONS - mm - DN 20 PN 16				
	R	S	T	DNs	DNd
HPP-HPF 2° RANGE	75	105	14	20	20

PUMP TYPE	MOTOR FLANGE B3 - B5	KW	DIMENSIONS - mm -													
			A	B	C	D	E	F	G	I	*L	M	N	O	P	Q
HPP-HPF 1° RANGE	71-4B	0,37	128	164	112	90	71	90	36	175	215	182	45	3/8"G.	160	3/8"G.
HPP-HPF 2° RANGE	90-S2	1,5	169	213	140	100	90	127	44	222	255	218	56	1/2"G.	200	1/2"G.

* Different according to the manufacturer.

** OPTIONAL UPON REQUEST: Baseplate - Flanges.



GEMMECOTTI SRL

Via A. Volta 85/A
20816 Ceriano Laghetto MB
ITALY
EUROPEAN UNION

Ph: +39 02.96460406

Fax: +39 02.96469114

info@gemmecotti.com
www.gemmecotti.com

