



Chlorine Dioxide Generator



LOTUS MAXI from 80 to 240

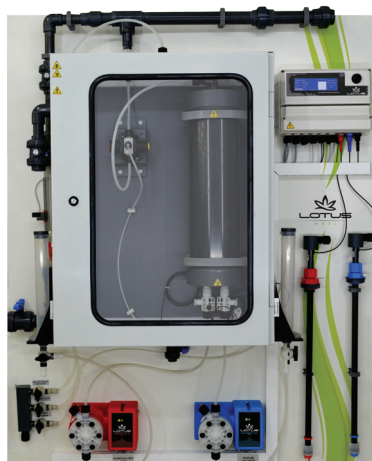

LOTUS MAXI 600



“LOTUS MAXI”

LOTUS MAXI is the largest product of our family of generators of Chlorine Dioxide . It is used in all those cases in which there is need of a big production, such as large water treatment plants. Chlorine Dioxide produced by LOTUS MAXI is set to be proportional to the circulating water flow or based on a setpoint, it is then dosed into the water flow.

LOTUS MAXI system has got:

- LOTUS control instrument
- HCl (red) and NaClO₂ (blue) metering pumps
- PCV reaction chamber
- level alarm for Chlorine Dioxide leaks
- collector for water
- bypass pipeline with no-return valve and flow meter
- 2 SEFL flow sensors as security
- MFKT/V multifunction valve as pressure, safety, anti-syphon and bleed valve
- reaction chamber
- injection valve
- 2 LASP4 (LASP4/V40) suction lances with level probe and coloured nuts. For 30 litres tanks
- static mixer
- double calibration beker

GAS SENSOR OPTION

LOTUS MAXI with gas sensor detection.

ADVANTAGES

- › Reaction at controlled pressure
- › Large-scale applications
- › High degree of stability of the Chlorine Dioxide solution
- › No ClO₂ loss due to closed reaction chamber
- › Diluted chemicals

FUNCTIONS

- › Instantaneous ClO₂ production
- › ClO₂ dosing in proportional mode
- › Flow control input (flow alarm)
- › Tank level controls (level alarms)
- › Water meter input
- › Stand-by input
- › Real time production data
- › Pumps and SEFL flow sensors monitoring
- › Permanent data storage with system data log (on Logbook menu)
- › ERMES communication
- › mA output
- › USB data log (option)
- › Ethernet module (option)
- › GSM/GPRS internal modem (option)
- › Service due date

FEATURES

- › ClO₂ concentration: 2 gr/l
- › Flow control input (flow alarms)
- › Tank level control (level alarms)
- › HCl (red) and NaClO₂ (blue) metering pumps
- › 2 SEFL flow sensors as security
- › MFKT/V multifunction valve as pressure, safety, anti-syphon and bleed
- › PVC reaction chamber
- › ASA (Acrylonitrile Styrene Acrylate) enclosure
- › IP65 protection (NEMA4x) of LOTUS control instrument and pumps
- › Wheel control for easy programming
- › Working temperature: 0/45°C (32/110°F)
- › mV or ClO₂ or temperature reading (on request)

LOTUS MAXI

Chlorine Dioxide Generator

	LOTUS MAXI 80	LOTUS MAXI 160	LOTUS MAXI 240	LOTUS MAXI 400	LOTUS MAXI 600	LOTUS MAXI 1000
CIO ₂ max capacity (g/h)	80 g/h	160 g/h	240 g/h	400 g/h	600 g/h	1000 g/h
Max pressure (bar)	8	8	8	8	5	4
Max chemicals consumption (l/h)	2.0 2.0	4.0 4.0	6.0 6.0	10.0 10.0	15.0 15.0	25.0 25.0
Concentration (g/l)	2 g/l					
Power supply	230 VAC (190/265 VAC) 115 VAC (90/135 VAC)					
Average power consumption (W/h)	44	44	44	56	96	96

LOTUS MAXI

Chlorine Dioxide Generator

LOTUS MAXI Dimensions

[mm].

